

FM 31-72

DEPARTMENT OF THE ARMY FIELD MANUAL

MOUNTAIN OPERATIONS



HEADQUARTERS, DEPARTMENT OF THE ARMY
JANUARY 1959

FIELD MANUAL }
No. 31-72 }

HEADQUARTERS,
DEPARTMENT OF THE ARMY
WASHINGTON 25, D. C., 9 January 1959

MOUNTAIN OPERATIONS

	Paragraphs	Page
CHAPTER 1. GENERAL CONSIDERATIONS		
Section I. Introduction -----	1-5	3
II. Terrain -----	6-9	5
III. Climate -----	10, 11	6
IV. Weather -----	12-23	7
V. Conditioning and acclimatization -----	24-32	16
CHAPTER 2. OPERATIONS		
Section I. General -----	33, 34	20
II. Troop movements and marches -----	35-45	20
III. Security -----	46-49	23
IV. Bivouacs -----	50-52	25
V. Offensive combat -----	53-62	26
VI. Defensive combat -----	63-69	31
VII. Supply -----	70-77	35
VIII. Tactical employment of climbers -----	78-85	37
CHAPTER 3. EMPLOYMENT OF THE ARMS AND SERVICES		
Section I. Infantry -----	86-90	43
II. Field artillery -----	91-102	45
III. Armor -----	103, 104	50
IV. Army aviation -----	105-108	51
V. Engineers -----	109-115	58
VI. Medical -----	116-138	66
VII. Transportation -----	139, 140	87
CHAPTER 4. MILITARY MOUNTAINEERING		
Section I. General -----	141-144	91
II. Basic technique -----	145-151	92
III. Movement of trained personnel -----	152, 153	126
IV. Unit movement -----	154-157	130

* This manual supersedes FM 70-10, 16 September 1947.

	Paragraphs	Page
CHAPTER 5. SNOW AND GLACIERS		
Section I. General -----	158-160	146
II. Classification of snow.....	161, 162	147
III. Avalanches -----	163-170	150
IV. Movement over snow and ice.....	171, 172	173
V. Movement over glaciers.....	173-177	175
CHAPTER 6. COMMUNICATIONS		
Section I. Use of wire and radio.....	178-180	186
II. Visual signaling and use of messengers.....	181, 182	189
CHAPTER 7. TRAINING		
Section I. Military mountaineering -----	183-188	191
II. Unit training -----	189, 190	195
III. Exercises in climbing.....	191-198	197
APPENDIX I. REFERENCES -----		204
II. MASTER TRAINING PROGRAM.....		206
INDEX -----		219

CHAPTER 1

GENERAL CONSIDERATIONS

Section I. INTRODUCTION

1. Purpose and Scope

This manual is designed to guide the infantry battle group commander, his staff, and subordinate leaders in mountain operations. It is designed also as a guide for commanders of supporting units and for staff officers of higher headquarters whose duty it may be to submit recommendations on the employment of units in mountain warfare. It covers the mission and employment of the infantry battle group and supporting arms as well as specialized technique and training required for combat in mountainous terrain. The material presented herein is applicable without modification to both nuclear and non-nuclear warfare.

2. Organization

The organization of the infantry and airborne infantry division is suitable for operations in mountain terrain. Only minor modifications will be required to fit a specific situation. These usually take the form of additional emphasis on resupply and movement of small units by army aircraft and elimination of vehicles and weapons not suitable to the terrain. In alpine terrain, specialized technical training and the use of special clothing and equipment will be required for operations.

3. Command

Decentralization of command is characteristic of mountain operations. Combat troops, equipment, and service elements located in a terrain compartment are usually placed under a single command thereby adding to the responsibilities of subordinate unit commanders. All commanders must possess resourcefulness and initiative. Combat in mountains demands great detail in planning and preparation.

4. Tactics

The same tactical principles govern warfare in mountainous terrain as on any other terrain.

a. In rugged mountains there are definite limits to the employment of large forces. Deployment is greatly hindered and restricted. Often adjacent units cannot provide mutual support. Rapid employment and shifting of reserves are difficult in the more restricted positions. Small units have many occasions for sudden and bold action. Opportunities to deceive the enemy are many.

b. Small forces can prevent, impede, harass, or canalize the movement of the main enemy force so that when the decisive battle takes place enemy troop strength is dissipated and he is compelled to fight under unfavorable conditions.

c. Troops must be prepared to advance over narrow and twisting roads and paths, trackless terrain, steep and slippery slopes, ravines, and precipices.

d. The tank usually plays a minor role in mountain warfare. The employment of heavy infantry weapons and field artillery is hampered by their bulk and weight, by the considerable dead space in their fields of fire, and by the difficulties of observation due to bad weather and intervening terrain features. It is the infantry, above all, that must bear the brunt of the battle. The importance of close combat increases as the efficiency of other methods of fighting decreases.

e. The focal points of mountain combat are the heights. Gun emplacements and observation posts on commanding heights can dominate the foreground. Advances where possible are made along ridges.

f. Both friendly and enemy forces can be expected to use nuclear weapons in mountain combat. Rapid exploitation of these weapons, by ground elements, is difficult due to the rugged terrain. Surface or subsurface bursts may be employed by the attacker or defender to disrupt or destroy the usefulness of the few lines of communication that exist. Surface-to-air missile units will provide a defensive capability against enemy nuclear delivery means. Air defense artillery units equipped with the NIKE-HERCULES system also furnish a surface nuclear capability, in addition to their primary air defense role.

5. Logistics

a. Logistical considerations are greatly affected in mountain operations. Time and space factors are never fixed, but vary constantly with the configuration of the terrain, the altitude, the scarcity of roads, the season. In general, a comparatively great amount of time must be allowed for the movement of troops and

supplies. Distance is measured in time rather than miles. Vertical distance between points is often greater than the horizontal distance.

b. The commanding officer must issue orders, fragmentary if necessary, to his subordinates early in the operation because of the time needed for movement of troops and supplies along the small number of steep and difficult routes, and because of the difficulties in bringing troops into position, in modifying their positions and in organizing supply functions.

Section II. TERRAIN

6. General

Mountains are generally defined as land forms higher than 1,500 or 2,000 feet characterized by steep slopes. Slopes are commonly 4 to 80 degrees and locally, in cliffs and precipices, may be vertical or even overhanging. Mountains may consist of an isolated peak, single ridges or complex ranges extending for a thousand miles or more like the Rocky Mountains. Most of the terrain is an obstruction to movement; and mountains favor the defense. History records many cases in which forces inferior in numbers and equipment have held off superior attackers in mountainous areas.

7. Roads and Trails

Existing roads and trails offer the easiest routes in the mountains. Most follow valleys between ridges, crossing ridges and divides by passes such as water gaps, wind gaps, cols and, rarely, calderas. Detailed maps such as topographic quadrangles show roads and many of the trails. Terrain intelligence, photo interpretation, local residents, and other sources may supply additional information.

8. Cross-Country Movement

Where there are no roads or trails it is particularly important to have full knowledge of terrain to determine the most feasible routes for cross-country movement. Intelligence reports may be available which show terrain features that may affect movement. When planning mountain operations it may be necessary to use additional information on size, location and characteristics of land forms and drainage, nature and types of rock and soil, and amount and distribution of vegetation.

9. Concealment, Cover and Observation

Irregular mountain topography provides numerous favorable places for concealment and cover. Digging of foxholes and tempo-

rary fortifications is generally difficult because soils are thin or stony and bedrock is commonly hard. Some rock types, however, such as volcanic tuff are readily excavated. In other areas, abundant boulders and other loose rocks can be used for the construction of hasty fortifications like those used by German troops in the defense of Mt. Cassino in Italy. Observation in mountains is variable. Posts on ridges and peaks may provide broad areas of observation particularly above the timber line.

Section III. CLIMATE

10. General

Mountain climate has a very definite effect on the physiology and pathology of the individual because the human organism is sensitive to weather changes and differing climates.

11. Mountain Air

a. Mountain air is relatively pure. The higher one goes, the more nearly pure it becomes. Above 5,000 feet it is practically germ-free. The physical composition of the atmospheric air is practically the same at high altitudes as it is at sea level. The rarefaction of air at high altitudes is due to the decreased partial pressure of the atmospheric oxygen. The utilization of oxygen by the body is dependent upon the pressure under which it is forced into the tissues. Forests, especially those with *coniferous* trees, lessen the percentage of carbon dioxide, and thus do their part in purifying the air. The snow completes this purification by drawing out of the air, and holding, all the impurities which might still be able to contaminate the air.

b. High mountain air is dry, especially in the winter when the humidity in the air condenses into ice. This dryness increases with altitude. The amount of water vapor in the air decreases in geometric proportion as the altitude increases.

c. Atmospheric pressure drops as the altitude increases. The pressure varies, on the average, about $\frac{1}{11}$ inch of mercury for every 330 feet rise.

d. The temperature drops as the air becomes more rarefied. In an atmosphere containing a considerable amount of water vapor, temperature drops about 1° F., for every 360 feet rise in altitude. In very dry air it drops about 1° F., for every 180 feet.

e. An important characteristic of the atmosphere at high altitudes is its luminosity. The sun's rays are either absorbed or reflected by the atmospheric haze which fills the air above low country, especially over cities. The rare dry air of the higher altitudes allows all the visible rays of the solar spectrum to pass

in their entirety. However only a fraction of the solar invisible rays can penetrate the atmospheric haze. In pure atmosphere, the proportion of ultraviolet rays remains constant, regardless of the altitude.

Section IV. WEATHER

12. Importance

a. Mountain weather can be either a dangerous obstacle to operation or a valuable aid, according to how well it is understood and to what extent advantage is taken of its peculiar characteristics. Trained men who are well clothed, equipped, and supplied may often convert such weather into an ally rather than an enemy.

b. Weather often determines the success or failure of the mission. Mountain weather is highly changeable. Military plans arranged in advance of an operation must be flexible. Every effort must be made to anticipate the weather, and also to allow sufficient latitude in the time schedule so that the leaders of subordinate units can use their initiative in turning the highly important weather factor in their favor. The clouds that frequently cover the tops of mountains, and the fogs that cover valleys offer an excellent means of concealing movements which normally would have to be made under cover of darkness or smoke. Mud can be overcome by diligent pioneering and intelligent use of equipment. The harmful effects of cold can be prevented in large measure by the use of proper clothing and the conditioning of personnel. Advantage must be taken of every clear minute to do the things that cannot be done when observation is obscured.

c. The safety or danger of almost all high mountain regions, especially in winter, depends upon a change of a few degrees of temperature above or below the freezing point. The comfort and health of men are affected. Ease and speed of travel are largely dependent on weather. Terrain that can be crossed swiftly and safely one day may become impassable or highly dangerous the next because of snowfall, rainfall, or a rise in temperature. The reverse can happen just as quickly. The prevalence of avalanches depends mostly on weather factors.

13. General Characteristics

Mountain weather is erratic. Hurricane winds and gentle breezes may be found a few paces apart. The weather in exposed places contrasts sharply with the weather in sheltered areas. Weather changes in a single day can be so variable that in the same locality one may experience hot sun and cool shade, chill wind and calm, gusts of rain or snow, and then perhaps intense sunlight again. This variability results from the life cycle of a

local storm or from the movement of traveling storms. In addition, the effects of storms are modified by the following local influences:

a. Variation in altitude.

b. Differences in exposure to the sun and to prevailing winds.

c. Distortion of storm movements and the normal winds by irregular mountain topography. These local influences dominate summer storms. During summer the weather fluctuations are at a maximum, although they are less severe than winter changes.

14. Temperature

a. *Temperature Inversion.* Normally, a temperature fall of from 3° F. to 5° F. per thousand feet gain in altitude will be encountered. Frequently, on cold, clear, calm mornings when a troop movement or climb is started from a valley, higher temperatures may be encountered as altitude is gained. This reversal of the normal situation is called "temperature inversion." This condition occurs because much of the heat of the earth's surface has been lost during the night through back radiation and the morning sun will strike and warm the higher (and easterly-side) slopes earlier than it does the valleys (and westerly-side) slopes. This inversion condition continues until the sun warms the surface of the earth and a lapse condition occurs.

b. *Solar Heating.* At high altitudes, solar heating is responsible for the greatest temperature contrasts. More sunshine and solar heat are received above than below the clouds. The important effect of altitude is that the sun's rays pass through less of the atmosphere and more direct heat is received than at lower levels where solar radiation is absorbed and reflected by dust and water vapor. There may be differences of 40° F. to 50° F. between the temperature in the sun and that in the shade. Special care must be taken to avoid sunburn and snow blindness which result from the combined action of intense sunlight and the reflected rays from snow fields or clouds. Besides permitting rapid heating, the clear air at high altitudes also favors rapid cooling at night. Consequently the temperature rises fast after sunrise and drops quickly after sunset. Much of the chilled air drains downward, so that the differences between day and night temperatures are greater in valleys than on slopes.

15. Cloudiness and Precipitation

a. Cloudiness and precipitation increase with height until a zone of maximum precipitation is reached; above this zone they decrease. Maximum cloudiness and precipitation occur near 6,000 feet elevation in middle latitudes and at lower levels as the poles are approached. Usually a dense forest marks the zone of maximum rainfall.

b. Slopes facing the prevailing wind are cloudier, foggier, and receive heavier precipitation than those to the lee of the wind, especially when large bodies of water lie to the windward. However, at night and in winter, valleys are likely to be colder and foggier than higher slopes. Heads of valleys often have more clouds and precipitation than adjacent ridges and the valley floor.

16. Wind

a. In high mountains the ridges and passes are seldom calm; however, strong winds in protected valleys are rare. Normally, wind velocity increases with altitude, since the earth's frictional drag is strongest near the ground, and this effect is accentuated by mountainous terrain. Winds are accelerated when they are forced over ridges and peaks or when they converge through mountain passes and canyons. Because of these funnelling effects, the wind may blast with great force on an exposed mountainside or summit. In most cases, the local wind direction is controlled by topography.

b. The force exerted by wind quadruples each time the wind speed doubles; that is, wind blowing at 40 miles per hour pushes four times harder than does a 20-mile-per-hour wind. With increasing wind strength, gusts become more important, and may be 50 percent higher than the average wind velocity. When wind strength increases to the hurricane speed of 80 miles per hour, men should hug the ground during gusts and push ahead in lulls. If a hurricane wind blows where there is sand or snow, dense clouds fill the air, and rocky debris or chunks of snow crust are hurled along near the surface.

c. In general, the velocity of the winds accompanying local storms is less than that of winds with traveling storms. There are two winds which result from the daily cycle of solar heating. During calm, clear days in valleys subject to intense solar radiation, the heated air rises and flows gently up the valleys. This wind is called a "valley" or "up-valley" breeze. On clear nights the mountainsides lose heat rapidly and cool the surrounding air which settles downslope to produce the "mountain" or "down-valley" breeze. The down-valley breeze, by pouring cold air into a valley, is responsible for temperature inversions, in which temperature increases with altitude, contrary to normal conditions.

17. Thunderstorms

a. Although thunderstorms are local in nature and usually of short duration, they can be handicaps to operations in the mountains. In the alpine zone above timberline, thunderstorms may be accompanied by driving snow and sudden squally winds. Ridges

and peaks become focal points of concentrated electrical activity which are highly dangerous.

b. Purely local thunderstorms develop from rising air columns resulting from the intense heating by the sun of a relatively small area. They occur most frequently in the middle or late afternoon. Scattered fair weather clouds of the cumulus type often appear harmless, but when they continue to grow larger and reach a vertical depth of several thousand feet, they may turn into thunderstorms on very short notice.

c. Thunderstorms occurring at night or in the early morning are associated with major changes in the weather situation, which often result in a long period of foul weather before clearing on the high summits. Thunderstorms occurring at these times may also be part of a "line storm" and if so, are followed by a prolonged period of cool dry weather.

18. Fog

On windward slopes, persistent fog, as well as cloudiness and precipitation, frequently continue for days, and are caused primarily by the local barrier effect of the mountain on prevailing winds. Any cloud bank appears as a fog from within. Fog limits visibility which, in turn, hampers operations by increasing the possibility of accidents. It also facilitates surprise attacks. If fog is accompanied by precipitation, additional clothing will be needed for protection against the uncomfortable combination of cold and wetness. When traveling without landmarks, it will be necessary to use a compass and a map to maintain direction.

19. Traveling Storms

a. The most severe weather conditions, storms involving strong winds and heavy precipitation, are the result of widespread atmospheric disturbances which generally travel in an easterly direction. If a traveling storm is encountered in the alpine zone during winter, all of the equipment and skill of the soldier will be pitted against low temperatures, high winds and blinding snow.

b. Traveling storms result from the interaction of cold and warm air. Although the heart of the storm is a moving low pressure area, the "warm front," which marks the advancing thrust of warm air, and the "cold front" of onrushing cold air are more important features than the center itself, from which they radiate.

c. The sequence of weather events with the approach and passing of a traveling storm depends on the state of the storm's development, and whether the location of its path is to the north or south of a given mountain area. Generally, scattered cirrus clouds merge into a continuous sheet which thickens and lowers gradually until it becomes altostratus. At high levels, this cloud

layer appears to settle. Lower down, a stratus deck may form overhead. A storm passing to the north may bring warm temperatures with southerly winds and partial clearing for a while, before colder air with thunder showers or squally conditions moves in from the northwest. However local cloudiness often obscures frontal passages in the mountains. The storm may go so far to the north that only the cold front phenomena of heavy clouds, squalls, thunder showers, and colder weather are experienced. The same storm passing to the south would be accompanied by a gradual wind shift from northeasterly to northwesterly, with a steady temperature fall and continuous precipitation. After colder weather moves in, the clearing at high altitudes is usually slower than the onset of cloudiness, and stormy conditions may last several days longer than in the lowlands.

d. Glaze in a form of precipitation deposited only under the special conditions found in traveling storms. When light rain or drizzle falls through air below 32° F., and strikes a surface that also is below 32° F., it freezes to the surface in the form of glaze. Glaze usually forms near the warm front of a storm and only persists if colder weather follows.

20. Weather Forecasting

a. The use of the portable aneroid barometer, thermometer, and hygrometer can be of great assistance in making local weather forecasts. Reports from other localities and from the weather service of the Air Force are also of great value.

b. In order to be utilized to its fullest extent, the resulting forecast must get down to the small unit leaders who are expected to make use of weather favorable for specific missions.

21. Bad Weather

Most of the bad weather experienced in mountain regions is a result of—

a. Local storms in the form of thunderstorms, with or without showers.

b. Traveling storms which may be accompanied by radical and severe weather changes, over a broad area. Usually, each type of storm may be identified by the clouds associated with it.

c. Seasonal moisture-bearing winds of the monsoon type which brings consistently bad weather to some mountain ranges for weeks at a time.

22. Cloud Types

It is possible to differentiate between local and traveling storms, and estimate their probable occurrence, by recognition of the following cloud types:

a. Cirrus clouds are composed of ice crystals and occur 4 to 7 miles high. They may be detached white clouds with fibrous structure, or they may be extensive thin veils.

b. Altostratus clouds are dark clouds that form a continuous uniform sheet at elevations of 8,000 to 16,000 feet. They may cover the sky completely and develop from the descending and thickening cirrus or the merging of high cumulus types.

c. Cumulus clouds resemble great patches of cotton or giant heads of cauliflower and form at any height from 1,500 to 7,000 feet. Their bases are flat, but their tops vary in size and height. Cumulus clouds are brilliant white in direct sunlight, but dark on the shaded side. Altocumulus clouds are similar in form, but smaller, and appear in uniform layer or cloud deck at 8,000 to 16,000 feet.

d. Cumulonimbus (thunderheads) are overgrown and darkened cumulus clouds that are yielding, or are likely to yield precipitation. A single cumulonimbus cloud mass may extend from a base at $\frac{1}{2}$ mile elevation to a height of 6 or 7 miles.

e. Stratus clouds are similar to altostratus, but much lower. They may develop from a fog layer in which the bottom portion has evaporated, or where upslope winds are blowing. Often they are associated with moisture precipitation and usually are seen below 3,000 feet, except where they are forced up over a mountain or lie in high valleys.

23. Weather Predictions

Each of the cloud types characterizes one or several phases in a given weather situation. The following are the most common weather indications, although they are not always applicable. An individual remaining in one mountain region for several weeks in any season can add indications for that area based on his own experience with local weather changes.

a. *Traveling Storms.* The approach of a traveling storm is indicated when:

- (1) A thin veil of cirrus spreads over the sky, thickening and lowering until altostratus clouds are formed (fig. 1). The same trend is shown at night when a halo forms around the moon and then darkens until only the glow of the moon is visible. When there is no moon, cirrus only dims the stars while altostratus hides them completely.
- (2) (a) Low clouds which have been persistent on lower slopes begin to rise at the time upper clouds appear.
(b) Confused layers of clouds move in at different heights and become more abundant (fig. 2).



Figure 1. Cirrus clouds.

- (3) Lens-shaped clouds accompanying strong winds lose their streamlined shape and other cloud types appear in increasing amounts.
- (4) A change in the direction of the wind is accompanied by a rapid rise in temperature not caused by solar radiation. This may also indicate a warm, damp period.
- (5) An intense green sky is observed shortly after sunrise in mountain regions above timberline.



Figure 2. Confused layers of clouds.

b. Local Disturbances. Indications of local thunderstorms, showers, or squally weather are—

- (1) An increase in size and rapid thickening of scattered cumulus clouds during the afternoon (fig. 3).



Figure 3. Thickening of scattered cumulus.

- (2) The approach of a line of large cumulus or cumulonimbus clouds with an advance guard of altocumulus. At night, increasing lightning to windward of the prevailing wind gives the same warning.
- (3) Massive cumulus clouds hanging over a ridge or summit both at night or in the daytime.

c. Strong Winds. Indications from strong winds seen at a distance may be:

- (1) Plumes of blowing snow from the crests of ridges and peaks or ragged shreds of cloud moving rapidly (fig. 4).
- (2) Persistent lens-shaped clouds, or a band of clouds, over high peaks and ridges or downwind from them.
- (3) A turbulent and ragged banner cloud which hangs in the lee of a peak.



Figure 4. Plumes of blowing snow.

d. Fair Weather. Fair weather may be associated with—

- (1) A cloudless sky and shallow fog or layers of smoke or haze at valley bottoms in early morning; or from a vantage point of high elevation, a cloudless sky that is quite blue down to the horizon or down to where a level haze layer forms a secondary horizon.
- (2) Conditions under which small cumulus clouds appearing in the forenoon do not increase, but decrease or vanish, during the day (fig. 5).



Figure 5. Small cumulus clouds.

- (3) Clear skies, except for a low cloud deck which does not rise or thicken during the day (fig. 6).



Figure 6. A low cloud deck.

e. During Precipitation. When there is precipitation and the sky cannot be seen—

- (1) Very small snowflakes, ice crystals, or drizzle indicate that the clouds above are thin and there is fair weather at high altitudes.
- (2) A steady fall of snowflakes or raindrops indicates that the precipitation has begun at high levels and that bad weather is likely to be encountered on ridges and peaks.

Section V. CONDITIONING AND ACCLIMATIZATION

24. Necessity for Conditioning and Acclimatization

a. The training of soldiers in mountains of low or medium elevation does not require all of the special conditioning and acclimatization procedures discussed here. Altitude sickness and other problems restricted to higher altitudes are extremely rare below 8,000 feet.

b. There is a need, however, for a period of 10 to 14 days devoted to conditioning and acclimatization for troops to be trained in altitudes over 8,000 feet. After a week or two at high altitude, the soldier will find that he is less exhausted, he sleeps better, and his appetite is normal. He will soon find that life in the mountains is definitely exhilarating. The essential reason for this change is that the red cells in his blood have increased in number, enabling more oxygen to be carried from the lungs to the tissues of the

body. During this period of acclimatization, the training program should provide for graduated physical exercises of various types including marches. In high mountains it is generally found that the air is dry and as a result perspiration is more quickly evaporated. This tends to mislead a person into thinking that he is not perspiring freely due to the fact that his clothes are less frequently moist even following strenuous exertion. This loss of body salt and fluid through perspiration soon leads to acute fatigue. This fatigue is recognized by muscle cramps and other symptoms normally identified with heat exhaustion. Treatment for this fatigue is simply replacement of salt and water which has been lost.

25. Psychological Adjustment

The psychological adjustment of the individual must be considered. Many persons who have lived in lower altitudes all their lives may have preconceived notions about the supposedly harmful effects of high altitude on the human organism. To them any illness however trivial may be construed as an ill effect of altitude which may cause them to become unduly concerned about their physical condition. This can be prevented by educational programs in which it is shown that high altitudes do not have these supposedly harmful effects. Many men who have lived on flat terrain have difficulty when faced with the problem of learning to negotiate steep slopes or cliffs. They will develop a sense of insecurity and fear. These men must be slowly introduced to these new terrain features and encouraged to progressively develop their confidence until they can negotiate a passage across such obstacles with assurance and ease. Men must be taught the various climbing techniques used, be indoctrinated with the principles of mountain marching. These capabilities are attained only through constant training and application. There are many individuals who possess fear of height in varying degrees; many of these individuals may overcome this fear by familiarizing themselves with the problems through practice. The individual cannot be forced to disregard this fear.

26. Physical Conditioning

Regardless of previous Army training and the amount of flat cross-country marching practice, the soldier newly initiated into the mountains finds mountain marching arduous and tiring. New muscles are brought into play and these muscles must be developed and hardened. Furthermore, a new technique of rhythmic movement must be learned. This conditioning is attained only through daily marches and climbs which result in increased stamina and endurance. Simultaneously with this development men acquire increasing confidence and better ability to safely negotiate terrain which they had previously considered impassable.

27. Personal Hygiene

The principles of personal hygiene and sanitation that govern the operations of troops over more normal terrain are also applicable in the mountains. The same strict adherence to the policies prescribed in FM 21-10 must be enforced to insure the maintenance of the health of the troops.

28. Water Supply

There is a false concept held by many that mountain water is safe for consumption. This indicates the need for additional emphasis on training in water discipline to insure that the soldier drinks only water from approved sources. (See FM 21-10 for methods of purifying water.) Fluids lost through respiration, perspiration, and urination must be replaced if the soldier is to operate with normal efficiency. Necessary emphasis must be placed on each of the three rules of water discipline. The three rules are—

- a. Drink only treated water from approved sources. Untreated water may be contaminated.
- b. Conserve water.
- c. Do not contaminate or pollute water sources.

29. Personal Habits

a. Personal cleanliness is especially important in extreme cold. In freezing temperatures, the individual has a tendency to neglect washing due both to the cold and the scarcity of water. This may result in skin infections and vermin infestation. If bathing is impossible for any extended length of time, the soldier should at least examine his skin and stimulate and cleanse it as much as possible by briskly rubbing his body with a rough towel. This practice will help reduce the possibility of skin infection and will also make the individual feel better in general.

b. Particular attention must be devoted to the care of the feet to afford protection against cold injuries. The causative factors for these injuries are present throughout the entire year in high mountains. The feet should be kept dry and socks changed at least once daily. The principles of foot hygiene apply with greater force in high mountains than they normally do in any other terrain.

c. Under conditions of extreme cold, there is a general tendency for the individual soldier to permit himself to become constipated. This condition is brought about by the desire to avoid the inconvenience and discomfort of relieving himself. Since maintenance of the health of the troops is a command function, all commanders, officers and noncommissioned officers should encourage the troops to maintain all normal personal habits of hygiene; the soldier

must be educated concerning the consequences of neglecting his personal hygiene habits.

30. Waste Disposal

For methods which should be used under conditions of snow and extreme cold, see FM 31-70.

31. Mountain Sickness

Mountain or altitude sickness is an acute temporary illness which may occur in mountains. The novice and experienced climber alike are subject to this malady in altitudes as low as 8,000 feet. The cause is usually poor physical condition, lack of acclimatization, or both. Symptoms may be headache, nausea, vomiting, lacking of appetite, insomnia, and irritability. This condition can usually be relieved by rest. In rare cases the patient must be taken to a lower altitude.

32. Valley Sickness

Valley sickness may occur when an individual who is acclimatized to high altitude returns to a low altitude. It is a rare temporary condition.

CHAPTER 2

OPERATIONS

Section I. GENERAL

33. Terrain and Weather

a. Mountainous terrain is usually characterized by one or more of the following: exaggerated terrain features, heavy woods or jungle, rocky crags and glaciated peaks, compartmentation, routes of communication which are limited in extent and of poor quality, extreme weather conditions, or high altitudes. For terrain evaluation, see FM 5-15 and FM 100-5.

b. Mountain terrain lends itself particularly well to surprise, but successful surprise action depends on skilled troops and a commander who knows how to use them. Decentralization of control is forced upon commanders of large units by prevailing terrain and weather conditions. Hence, the initiative, resourcefulness and judgment of small unit commanders is taxed to the utmost, as they may be operating independently or semiindependently for extended periods.

c. Mountain weather is characterized both in summer and winter by inclemency, or by large temperature differences between day and night, and by sudden and localized atmospheric disturbances such as violent rainstorms and snowstorms.

34. Standing Operating Procedures

In order to facilitate mountain operations, a detailed standing operating procedure should be prepared by each unit, including the platoon. This standing operating procedure should cover the organization of combat teams down to and including the reinforced platoon, a normal procedure for supply, making bivouacs and emergency shelters, march rates and march formations, and any changes in organization and equipment required for summer or winter operations.

Section II. TROOP MOVEMENTS AND MARCHES

35. March Technique

a. Troops that have acquired the proper technique for marching in mountains are capable of marching many times the distance that can be covered by troops not so trained. The prime consideration is accomplishing the mission by conserving the soldier's strength and combat efficiency. The individual soldier must acquire

a steady, rhythmic pace, decreasing in speed with the steepness of the slope. In addition to the effect of the terrain, the rate of march is further reduced by wind, rain, intense heat, and fog. When climbing, the length of the regular pace should be shortened, stepping around rather than over obstacles, and keeping the feet flat. Use of the balls of the feet alone should be avoided. The knees should be slightly bent, and footholds selected carefully. When traversing steep slopes on soft ground it is desirable to kick footholds and to take advantage of natural flat hummocks. When traversing steep slopes on hard ground the feet should be flat, rolling the ankle with slope. Logs, sticks, or small rocks should not be stepped on. When ascending steep slopes the rate may vary from 40 to 85 steps per minute, depending principally on the altitude.

b. Over uneven or difficult footing, a 5-foot distance between men allows the soldier to adjust the length of his stride and to keep moving without being forced to halt by the varying speed of the man ahead. It is often advantageous to climb at an angle rather than directly up a hill to conserve energy.

36. Effects of Marching

Improper pace or cadence in marching uphill may result in serious injury to the heart and respiratory organs. Descending produces continuing jars, the severity of which is increased by the weight of a pack, resulting in strain on the legs, pelvis, and spinal column. Climbing tires the heart and lungs; descending causes great muscular fatigue.

37. Rate of March

The rate of march may seldom be calculated exactly. To estimate the time required to cover a given distance: to the time required for marching a map distance add 1 hour per each 1,000 feet ascent or 1,500 feet descent. For example, a 10-mile march on a hard surfaced road requires 4 hours. If there is a total climb of 2,000 feet and a total descent of 1,500 feet the march will take 7 hours.

38. March Discipline

March discipline must be rigorously enforced in every aspect. If a man is forced to stop to repair or readjust equipment or because of illness or an injury, he should immediately fall out of the columns, and should not try to regain his place until the next halt. All commanders must give continuous attention to keeping marching formations closed to proper distances. Ordinarily this can only be accomplished at halts. Straggling must not be tolerated and the taking of short cuts should be forbidden.

39. Pace-Making and Halts

The march unit should be the company. An experienced non-commissioned officer, carrying the same load as the majority of the men and marching at the head of the company, maintains the pace ordered by the march unit commander. The pace of the column must be governed by the most heavily loaded element. It is advisable to make a 5 minute halt to adjust clothing and equipment after the first 15 minutes of marching, and 5 or 10 minute halts every half hour thereafter. At the regular halts, men should remove their packs and weapons. Lying down with the feet elevated will help freshen the legs and prevent stiffness. Troops should be trained to get off of the trail immediately at all halts, in order to allow messengers to move along the column.

40. Column Length

When a narrow trail necessitates marching in single file, the length of an infantry battle group may approximate 5 miles. The difference in elevation between the head of the column and the tail of the column may be over 3,000 feet. On a winding ascent, the trail distance between the point and the main body may be 2,000 yards, although the cross-country distance may be only a few yards. Under such conditions, the main body may be closer to the enemy than the point and may be fired upon at the same time as the point, or even before the point is engaged.

41. Selection of Routes

a. Reconnaissance of routes of march should be made and the route selected on the basis of ease in marching as well as tactical security. Factors governing the choice are availability of ridge routes, good footing, contour travel, timber lines, and geological formations such as ledges. Primitive trails are usually found along ridges. Highways usually follow the valleys. Movement down a valley, without security on the high ground, invites ambush. Movement on the crest of a ridge, where some of the best trails are found, invites observed artillery fire. In an uncovered march, a unit should march below the crest of the ridge with flank security below both military crests observing the valleys.

b. Timing and planning are important in order to avoid halts or bivouacs on exposed terrain.

42. Selection of Objectives

Because of optical illusions created by clear air, looking down from the heights, and intervening depressions, time and distance will usually be underestimated. Particular care must be taken to select an objective which can be reached within the time available. The route and alternate route to the destination should

be reconnoitered in advance. One unexpected extension of a march will often produce undue exhaustion which, in turn, may result in a late arrival, a poorly prepared bivouac, and inefficient security.

43. Movement over Difficult Terrain

Movement over extremely difficult terrain such as cliffs, rocky crags, ravines, glaciers, or deep snow, requires special preparation, training, technique, and equipment (chs. 4 and 5).

44. Night Marches

When contact with the enemy is imminent or has been gained, most of the marching will be at night. Night marches in mountains are very difficult, often dangerous, and excessively tiring, and therefore should be attempted only when absolutely required by the situation. Daylight reconnaissance, the marking of routes to be used and the employment of competent guides are essential to the success of a night march. Distances between men and units are decreased. On occasion it is advisable to maintain physical contact with the man ahead. While bright moonlight makes a night march easier, it also improves enemy observation. It is extremely difficult to move along a rocky path at night without noise. Dislodging of a single rock may start a rockslide that can be heard over a mile away, and hobnailed shoes may create telltale sparks. When marching through woods or areas where trails are many and indistinct, numerous connecting files will be required between march units in order to maintain continuous contact. It is usually impossible for anyone to move up and down a column on a mountain path at night to check on distances and maintain march discipline. All orders must be relayed rearward and forward through the column.

45. Marches in Clouds or Fog

Marches in clouds or fog present the same difficulties as night marches. Keeping a sense of direction is more difficult, since clouds are often so dense that one can hardly see the ground. Such conditions necessitate even closer columns, a slower pace, and the use of audible signals. The crowding together of units may create serious tactical disadvantages when the fog or cloud lifts.

Section III. SECURITY

46. General

a. Mountain terrain offers many vantage points for enemy observation and ambush thus requiring the placing of added emphasis on security. Commanding ground must be occupied

immediately by security detachments strong enough to hold it against hostile combat or reconnaissance patrols. Enemy positions, not readily accessible, may have to be neutralized and bypassed so as not to impede the progress of the main body. Neutralization can be accomplished by air attack, artillery or tank fire, or by infantry weapons. Smoke, conventional fires, and nuclear fires should be considered.

b. When defending against well trained and aggressive enemy troops, no mountain ranges or terrain obstacles can be considered as insurmountable, and every conceivable approach must be guarded.

c. At night, and during other periods of restricted visibility enemy infiltration is a constant danger. The use of additional troops may sometimes be necessary in order to provide adequate protection for rear installations.

47. Listening Posts

A man's voice in a valley frequently can be heard on ridges 3,000 feet above. Consequently, valley approaches, as well as ridge approaches, are often covered by listening posts well up on ridges. However, thorough coverage of a valley approach may often require listening posts located in the valley. Mountain streams often drown out all noises for those near the stream when those higher on the ridge can distinguish each distinct sound.

48. Flank Security

a. Flank security is provided by forces occupying dominant terrain on the flanks of the main body. Flank security forces limited to foot mobility often move to vantage points well in advance of movement of the main body. In winter, ski troops may be used for this difficult mission. Flank security elements are transported by helicopters or vehicles when practicable. The number and strength of flank security elements is determined by the number of terrain features which must be occupied or patrolled and by the mobility of the flank security forces.

b. Commanders consider the difficulties imposed by terrain on movement of security forces and plan accordingly. The frequent lack of passable routes on the flank of the main body may limit flank security to helicopterborne patrols or aerial observation. However, strong ground flank security elements are used when practicable. Consideration must be given to ceiling limitations of helicopters which are approximately 6,000 feet for the H-13, and H-23 and 12,000 to 13,000 for the H-19 with a maximum of four passengers.

49. Antimechanized Security

Surprise raids by armored elements are rare, but should nevertheless be guarded against by means of road blocks, mines, and antitank guns.

Section IV. BIVOUACS

50. General

a. Most mountainous regions offer few camp sites suitable for large units. The limited areas and the increased time lengths of columns will usually require companies, or even platoons, to bivouac separately on the nearest suitable spot to the halting point. This method will not necessarily expose subordinate units to any great danger, as even a platoon organized for all-around defense can successfully withstand an attack by a larger force and can easily be supported by adjacent units. The best camp sites are on gentler slopes, near streams and in wooded areas. Above the tree line, tents must be well dispersed and camouflage discipline strictly enforced. In general, mountain bivouacs should be located on commanding ground with provisions for all-around defense of the area. Unprotected small units should never bivouac in a valley in the presence of the enemy, as they do not possess sufficient force to outpost surrounding high ground.

b. For bivouacs in snow and extreme cold, see FM 31-71; for bivouacs in jungle, see FM 72-20.

51. Formations

a. The company should bivouac in a formation suitable for perimeter defense. If sufficient overhead cover is available, the company should bivouac astride the road or trail being used, with trails made for the flank platoons. The use of platoon bivouacs will further reduce the time required to close up at night and to move out in the morning.

b. The force commander, when issuing his order to halt, should indicate whether to close into platoon or company bivouacs, depending on the density of cover, the time length of the column, and his mission the following day.

c. The actual setup of bivouacs will vary considerably due to the irregularities of the terrain. Living conditions are continually improved if the same area is to be used for more than one night. All types of shelters may be dug in the side of a slope, using shelter halves, ponchos or pieces of canvas covered with grass or branches for roofing. On a fixed front, bomb proof caverns may be blasted out of bed rock and used for supply storage as well as living quarters.

52. Precautions

a. Smoke from a fire in a valley will often rise in a column that can be seen for several miles. Lights at night can be seen from distant visible peaks. Exposed lights or fires should never be permitted under combat conditions. If absolutely necessary to have fires in the mountains, it is best to put them in small depressions on top of the higher ridges. A pit for the fire about two feet deep should be dug and the fire only lit at night to prohibit observation of the smoke. If below tree line, it should be located among trees. The reflection of the sun or other light from equipment can expose an otherwise well concealed bivouac. The outside of all mess gear should be blackened, care should be taken in the use and disposal of ration cans, and no equipment which reflects light should be exposed.

b. Tents, equipment, and supplies should not be placed too close to dried-up stream beds during the summer months, as sudden rainstorms and cloud bursts may turn the beds into raging torrents.

c. Bivouacs should not be placed where rockfalls and avalanches threaten.

Section V. OFFENSIVE COMBAT

53. Influence of Terrain

a. Mountain combat lacks the unity characteristic of combat in rolling terrain, particularly in the offensive phase. The configuration of the terrain tends to give the battle field a piecemeal character and to divide it up into more or less isolated conflicts difficult to control by higher commanders. Subordinate unit commanders must maintain their initiative within the plan of the given mission and in accordance with the expressed intentions of the higher command.

b. Envelopments are executed where possible, often in conjunction with frontal attacks, to prevent full enemy attention to enveloping forces. Helicopterborne assault forces are especially useful in executing surprise attacks and flanking maneuvers. In all offensive operations, the seizure of dominant terrain features as intermediate and final objectives becomes the core of the commander's plans. Specific effort to capture vantage points for artillery observation must be emphasized.

c. In order to advance successfully, troops should ordinarily work along ridges and high terrain features, avoiding natural corridors of approach, which are usually mined and easily defended. In this manner the enemy will be forced to abandon strongly defended positions in the valleys and natural approaches

as they are bypassed. The peaks and ridges will generally be heavily defended by the enemy, and seizing the high ground will necessitate a frontal attack. By moving up the noses of the subsidiary ridges instead of the draws, the cost of such an operation will be reduced.

54. Control Measures

Intermediate objectives, directions of attack, or axes of advance following ridge lines are frequently used control measures. Where lateral restrictions of fires or movement is necessary, boundaries are assigned.

55. Initiative

In rugged terrain, unusual and unexpected opportunities will often present themselves to small unit leaders. If these advantages are rapidly and aggressively exploited, the whole action may be influenced. Because of this, junior leaders should have some knowledge of the overall situation; orders must be general, allowing initiative on the part of subordinates; and the higher commander must be quick to seize the advantage gained by one of his smaller units.

56. Detached Missions

Units operating semi-independently should be of such composition that they can accomplish the mission without additional support.

57. Approach March

a. In a march along a narrow ridgeline trail, the column length of a battle group may be as much as 5 or 6 miles, and the time length, several hours. Deployment in width will take considerable time. The advance guard may be composed of one rifle company reinforced by elements of the mortar battery, terrain permitting, and a detachment of engineers. A rear guard may be necessary and is organized similar to the advance guard but in reverse order. This plan will apply when limited ridgeline trail nets prohibit the use of more than one trail. When more trails are available, or when combat is imminent, parallel columns, a wedge formation, or a formation with a unit on each ridge and the main body in the valley in rear can be used. In all cases, each unit separated from the main body must be capable of fighting without support. During the movement to contact, air landed forces may be employed with the covering force, between the covering force and advance guard, with the advance guard, and on the flanks of the main body.

b. Because of the time required to reconnoiter enemy positions and because of the constant threats of ambush, the rule, "Contact once gained should never be lost," is especially applicable.

c. Lateral contact between adjacent units is seldom continuous, and connecting patrols must be dispatched frequently. Combat patrols must be sent to the flanks to cover areas that have been bypassed.

d. Contact with enemy encountered during the approach march is maintained by the use of patrols and/or aircraft.

58. Attack

a. Flanking action sometimes will be impossible and the unit required to attack frontally.

b. Frontal daylight attacks in narrow sectors have little chance of success. Such attacks are bound to be canalized and observed, thus giving the enemy the opportunity to shift his reserves for counterattack. On the other hand, if the attack is launched quietly and stealthily at night, without initial supporting fires, there is a greater chance of getting through a surprise assault without being exposed to observed and concentrated fire.

c. Simplicity of plan is the essence of a successful night operation. Such planning must provide for continuous, effective control by the commander, and for alternate action in the event that unforeseen developments arise. Characteristics of night attacks in the mountains are—

(1) Difficulty in maintain control.

(2) Slow and methodical movement.

(3) Difficulty in organizing objective after successful assault.

d. The attack of a very steep position is frequently made easier by the great amount of dead space. Halts should not be made on top of a ridgeline objective. Advance over crests should be made cautiously, in a well-deployed formation. The attacker should continue to push the enemy toward the next objective, or dig in and reorganize well forward of the ridge crest. In case of a halt to reorganize, leaders of assault units should dispatch combat patrols to maintain contact with the enemy.

e. The crossing of a lateral valley and assault of a well defended ridge are similar to the forcing of a river crossing. The purpose is to move a force across quickly and economically and establish a bridgehead to permit the crossing of the main body. This requires careful reconnaissance, coordination of supporting fires, and finally a carefully planned attack, preferably with the use of smoke or at night. *To move the entire force from the ridge into the valley before the next ridge has been secured is to invite disaster.*

f. An attack by vertical envelopment may overcome the defensive strength of an organized position that a ground force might find difficult to penetrate or outflank. In addition, air landed forces can attack with greater speed than ground forces. They should be large enough to take advantage of the surprise gained. Multiple routes may be used to reduce the time troops and aircraft are exposed to enemy observation and fires during movement. Routes must be selected which do not overly divide supporting fires. Every effort is made to neutralize enemy fires while air landed forces are flying over an organized position. If the air transported force is not employed in a vertical envelopment during the initial phase of the attack, it may be held in reserve to reinforce or exploit a penetration. A prerequisite for successful attack using transport aviation is that command of the air must be achieved prior to their entry into hostile territory. Command of the air is a term broader in scope and meaning than air superiority. Chapter 7, FM 100-1, defines command of the air as "the degree of one force over another which permits the conduct of air operations by the former at a given time and place without prohibitive interference by the air force, guided missile and/or air defense artillery action of the opposing force." Its two elements are—offensive counterfire means and active air defense means.

g. Command posts should be close to the front. This permits positive control of forward elements by making electrical communications more reliable and enables messengers to perform their missions more rapidly with less chance of being lost, and staff officers to give closer personal supervision to the operations. Although close to the front lines (200 to 500 yards), the pronounced defilade and the proximity of supports and reserve will often give the command post protection from enemy fire and infiltration.

59. Supporting Weapons

a. Infantry heavy weapons, artillery forward observers, and survey parties should closely follow advancing infantry to commanding ground in order to give continuous support to the attack. All combat arms officers and NCO's, to include combat engineer officers and NCO's should be able to adjust the fire of supporting weapons.

b. Because of the difficulties of ammunition resupply, the standing operating procedure or field order should include the percentage of field artillery and mortar ammunition to be retained for close support of the assault and for breaking up a counter-attack. In addition, a fixed number of rounds should habitually

be kept in reserve to be used only on the order of the unit commander.

60. Use of Smoke

The use of smoke in various phases of mountain operations assumes a high degree of importance. Smoke must often be used in daylight frontal attacks, stream crossings, withdrawals, and for marking and identifying positions, targets and objectives. Weather conditions such as snow storms and fog may supplement smoke in concealing the attacker.

61. Exploitations and Pursuit

a. Each local success should be exploited immediately and vigorously by utilization of reserves for flanking attacks on adjacent enemy points of resistance, seizure of his communication centers, and cutting off the retreat of isolated enemy forces. By interdiction fire the artillery should cover to the limit of its range every conceivable escape corridor. Transport helicopters may be employed to shift supporting artillery and their forward observers rapidly, without regard to terrain obstacles. Helicopter-borne combat patrols can be utilized to block retreat by employment at key terrain features, to create obstacles, emplace atomic demolition munitions, and, in general, to cause harassment and disruption of enemy reserve and supply areas. Tanks may be utilized along the roads or trails to attack retreating enemy groups. Participating aviation, if available, should be called upon to attack retreating columns with its maximum strength, especially at centers of communications and defiles. During exploitation, the security of rear areas must be assured against action by bypassed enemy groups who may infiltrate.

b. The fatigue of the attacking troops will exceed that of the defender. For this reason, the troops of the attacking echelon should not be used in the pursuit if it can be avoided. Reserve troops can be effectively used, particularly if committed just prior to the capture of the objective.

62. Attack Against a Fortified Position

a. Attack against a fortified position is extremely difficult in mountains and requires more time for planning, organization, and preparation than in ordinary terrain. Careful and continuous reconnaissance, supplemented by the study of vertical and oblique aerial photographs, is essential. The gaps between fortified positions, defended only by mobile troops, may be expected to be heavily mined and in a more irregular pattern than on ordinary terrain. For detailed instructions see FM 31-50.

b. Surprise flank attacks, coordinated with attacks on rear areas by airborne troops, and supported by highly concentrated and accurate artillery preparations at the critical points, may be employed in order to break through fortified positions.

Section VI. DEFENSIVE COMBAT

63. Advantages

a. Regardless of the size or composition of the units involved, defensive combat in the mountains has the following advantages:

- (1) Dominant terrain provides the defender, and denies the attacker, observation and firing positions.
- (2) The slopes and other terrain features impose difficulties on the attacker.
- (3) There are areas which are either impassable or extremely difficult for the enemy to negotiate.
- (4) The lack, or scarcity, of roads places restrictions on the use of tanks or other combat vehicles, and renders them extremely vulnerable.

b. The inherent advantages may be increased to a great extent by manmade obstacles combined with long-range nuclear and non-nuclear fire and aerial bombardment along enemy routes of advance. A small number of well placed demolitions is often sufficient to stop for a time all enemy movements on a large section of the front.

c. Mountainous terrain permits the defender to more easily deceive the enemy as to his strength, purpose, and dispositions. Although it is difficult to move reserve units, the defender can usually accomplish such movement more rapidly than the attacker, since the former has more time to prepare a network of lateral trails and his troops are ordinarily less fatigued.

d. Delaying action is particularly effective in mountains and can be accomplished by a much smaller force than is ordinarily needed. Roads and trails can easily be made impassable for a long time by creating rockslides and blasting craters on the steepest parts, in narrow passes and, in general, where the obstructions cannot be bypassed or easily moved.

64. Disadvantages

The disadvantages of defense in mountains are—

a. The compartmentation makes it difficult, or impossible to shift fires of supporting weapons readily.

b. It is often impossible to have grazing fire in rugged terrain.

c. Mountains with wooded slopes, and moderately difficult cliffs, enable the enemy to make decisive surprise attacks.

d. Difficulty of digging necessitates longer time for preparation and organization of positions.

e. Greater possibility of being bypassed and cut off by the enemy.

65. Selection of Positions

a. The selection of defensive positions is governed by the necessity for—

- (1) Barring avenues of approach which the enemy might use.
- (2) Protecting routes of communication for the defense, especially important crossroads, bridges, and lateral roads which might be used by the reserves.
- (3) Protecting the flanks by placing them against deep ravines, vertical cliffs, or other areas difficult to penetrate.
- (4) Covering all areas of the front, no matter how inaccessible to the enemy they may appear to be.
- (5) All-around defense, particularly since terrain considerations may necessitate the organization of defensive positions on successive ridges.
- (6) Covering ravines by direct and indirect fire and blocking them with antipersonnel mines, barbed wire or other obstacles. It may be necessary to position individuals in valleys during the periods of low visibility.
- (7) Effective observation of all hostile approaches in order to have early information of enemy movement and troop concentrations.

b. The use and location of automatic weapons is of vital importance in mountain warfare. Bare ridges can often be better covered by automatic fire from an adjacent ridge than from any position on the ridge itself. Lateral communication between these mutually supporting groups should be established. Visual signals such as smoke, flags, or pyrotechnics are usually the most dependable.

c. A reverse slope defense may be necessary when the occupation of a forward slope would subject the defender to heavy observed fire, or when the enemy has a known nuclear capability (FM 7-10, FM 7-40, and FM 100-5).

66. Counterattack

Counterattacks, when launched down a descending slope, have the advantage of permitting more rapid movement. Counterattacks to restore a defensive position should be conducted as soon as possible following the loss of the position. This will prevent effective enemy reorganization.

67. Retrograde Movements

a. The usual difficulties encountered in any retrograde movements are increased when such an operation becomes necessary in the mountains. Pursuing troops can infiltrate and outflank if they advance rapidly on routes parallel to the route of withdrawal of the defender and emerge along lateral routes on the flanks or in the rear. In addition, limited trail and road nets hamper the withdrawal of equipment and supplies.

b. The withdrawal of the forces engaged in the various terrain compartments must be closely coordinated to prevent the cutting off of some units, or sudden breakthrough by the enemy, which may result in the partial or total destruction of supply columns.

c. Helicopters can assist in retrograde movements by transporting units rapidly to new positions. In a daylight withdrawal they must be able to transport units that have broken contact with the enemy. Elements not able to break contact will withdraw on foot. In a night withdrawal, secrecy and stealth are paramount considerations and helicopters may be limited to withdrawing the detachments left in contact. This type of operation requires detailed plans, thorough daylight reconnaissance, and careful timing. Considerations for the withdrawal of elements in close contact with the enemy are similar to those for withdrawal of isolated units.

d. Artillery and aircraft should concentrate their fire and bombardment on points where the enemy must pass through narrow gaps or over obstacles.

e. For further information on retrograde movements see FM 7-10 or FM 7-40.

68. Fortified Areas

Mountain terrain lends itself to the establishment of strong fortified areas. For a discussion of the defense of fortified areas, see FM 31-50.

a. In valleys containing the principal routes of communication, strongly fortified areas may be organized. These defenses will generally consist of tiered works, beginning at the lowest elevation in the valley in order to enfilade the main route. Others on the slopes are usually responsible for the opposite slope and long range interdiction. In addition, all approaches to the valleys are covered with extensive fields of antitank and antipersonnel mines and other obstacles.

b. Because the gaps and flanks are the most likely points of attack, the bulk of fire power should be concentrated at such points. Every effort should be made to hold these positions at all costs.

69. Defense Against CBR Attacks

a. *Chemical.* The employment of chemical munitions in mountain warfare will be mostly by air-delivered weapons due to difficult logistic problems and increased munition requirements for cold weather employment. The defense against chemical attack in mountainous terrain is the same as on flat terrain with similar temperatures. At high altitudes where the temperature drops below -20° F., the protective mask must be winterized to prevent fogging of the lenses and frostbite to the face. The winterizing kit contains dark lenses to prevent snow blindness. At temperatures below -20° F., the mask should be carried under the parka and placed in the sleeping bag at night to prevent hardening and cracking of the rubber face piece.

b. *Biological.* Defense against biological agents in mountainous terrain does not differ in principle from that in flat terrain unless conditions of extreme cold exist. As in flat terrain, the individual soldier's first line of defense against biological agents in aerosol form is his protective mask. Troops suffering from dehydration, undernourishment, or lack of rest will be particularly vulnerable to biological attack. In defense against biological warfare, special attention should be given to the individuals' maintaining a high degree of personal hygiene and to allowing the consumption of only purified, approved water. If a biological agent has been disseminated, drinking water obtained by melting snow is unsafe. In mountainous regions, water contamination may be encountered at sites far removed from the source. Contamination hazards may be created or lengthened when layers of snow or ice which are deposited on contaminated areas refrigerate certain agents, allowing organisms to remain alive and causing the agent to be hazardous when the area thaws. In general, biological aerosols may be more effective at lower temperatures because agent decay (dying of organisms) immediately following dissemination is decreased, causing the aerosol to remain ineffective over a greater distance as it moves downwind.

c. *Nuclear.*

- (1) The defense against the effects of a nuclear attack in mountain operations will be more difficult than in flat terrain due to the lack of roads and trails and the slow speed at which troops can move. The construction of foxholes and other shelter for protection from fallout radiation will be difficult where the ground is rock, scree, or frozen. The improvised shelters constructed of snow may provide the only obtainable protection from radiation. In mountainous terrain the deposit of fallout will be very erratic if high wind conditions exist. The radia-

tion dose-rate may be many times higher or lower short distances away from the nuclear detonation. Natural shelters such as ravines, walls or chimneys may provide shielding from radiation and deflection of fallout. Movement from a position to avoid fallout should not be attempted unless radiological survey information is available from unit or supporting radiological survey teams. Aerial radiological survey will be more difficult in rugged mountains and provides less accurate information due to the irregular deposit of fallout and the difficulty of maintaining constant flight altitude above the ground.

- (2) The range of casualty-producing thermal effects from nuclear weapons will be extended by clear mountain air. Within this range casualties from thermal effects will be reduced by the added clothing required at high altitudes. If the terrain is covered by snow, a greater number of casualties will result from flash blindness.
- (3) The primary and reflected blast waves resulting from the detonation of even a small-yield nuclear weapon may cause avalanches and rock slides up to distances of 20 miles or more from the point of detonation. Units operating under conditions of nuclear warfare should be particularly careful to select positions where they will not be hit or trapped by rock or snow slides.

Section VII. SUPPLY

70. General

a. Units operating in remote mountain areas usually cannot depend upon local sources of supply since such sources usually provide only the bare necessities for the inhabitants. This means that troops operating in this type of terrain must depend entirely on transported supplies. The amount of supplies that can be moved is usually very limited since hand-carry must be used to a large extent. Ordinarily, three stages or means of transportation are required: vehicles wherever roads permit, aircraft, and finally individual soldiers or porters. Since the combat unit in mountain operations will usually be a reinforced battle group with the resulting decentralization of command, there must be a corresponding decentralization of supply. In certain cases, supply points may be necessary for servicing isolated frontline units. The location of these supply points and the time that the various units will draw their supplies should either be incorporated in the field order or, in a rapidly changing situation, the information should be furnished in fragmentary form.

b. It may often be necessary to devise special combinations and methods of distribution. These will depend, to a large measure, on transportation facilities, location of combat units, and type of terrain in which operations are under way.

c. Supply operations in mountainous terrain are affected by the following additional factors:

(1) Ration needs of the troops are increased by the rigors of the terrain and, in cold weather, by the climate.

(2) The needs for equipment and fuel are increased.

d. Careful planning by all echelons of command is of the utmost necessity if supply is to function smoothly. Unless plans are carefully made, the rapidly changing tactical situations will cause a lengthening of supply lines which may result in a retardation of supply or its complete interruption. To prevent such occurrences, plans should be made to organize advance supply points for each tactical unit being serviced.

71. Supply by Air

Aerial supply and resupply can be used under various conditions, either by parachute drop, free drop, or cargo helicopters when ground supply agencies encounter terrain difficulties. Unpredictable weather and air currents, cloud-covered peaks, and lack of emergency landing places make this method hazardous, especially in alpine terrain.

72. Special Clothing and Sleeping Equipment

The field uniform prescribed for infantry units is generally satisfactory for troops operating in mountains who are not specifically classified as alpine troops. The two most important items are footgear and headgear. The leather combat boot with good rubber composition soles and heels provides excellent traction on rock, and the steel helmet offers the best possible protection from falling rock. Troops operating in alpine mountains may be equipped with special mountain boots with rubber cleated soles and with the mountain type, down filled sleeping bag. For detailed information on clothing and sleeping equipment, see TM 10-275.

73. Bedrolls

Except in a coordinated attack on a limited objective, bedrolls or packs should be kept with the individual. Difficulties of supply will congest the limited road net so that bedding will seldom reach the troops at night.

74. Rations

Individual combat rations, Assault Packets, trail rations, and rations, small detachment, 5 persons, will normally replace the

field ration A and operational ration B, but one hot meal per day should be served if possible. Hot meals may be prepared in the rear and moved forward by vehicles, helicopters, or by individuals using packboards. Extra heating units from field ranges, or small detachment stoves, should also be brought forward so that the food may be reheated in the event that it cannot be consumed for some time. This is especially desirable when a unit is expected to be isolated from its lines of communication for an extended period. Food with greater caloric value is required for the strenuous work of mountain fighting and for maintaining body heat in cold weather. For this reason, every effort should be made to serve hot prepared meals at every opportunity. Small gasoline stoves (1-burner cooking outfit), or individual fuel tablets and improvised heating methods are highly recommended for use by outposts, patrols, and other small groups which have no other means of heating their food.

75. Ammunition

Ammunition distributing points must be moved forward frequently and kept relatively close to the front lines in order to reduce the difficulty and the delay in delivery that are usually imposed by precipitous terrain. The positions of emplaced weapons must be considered when selecting locations for ammunition distributing points in order to reduce the time and effort in supplying ammunition.

76. Water

In many mountainous regions, water is abundant during all seasons. No matter how pure and clean mountain water may appear to be, purification is necessary and should be accomplished by approved methods. In some mountainous regions where there is little or no water, provisions must be made for carrying great quantities by the already overtaxed transportation system. Organic vehicles and 5-gallon water cans can be used for this purpose. Whenever the use of any other type becomes necessary, the weight and bulk of the container should be seriously considered.

77. Movement in Rocky Terrain

In difficult terrain it may become necessary to move supplies up vertical cliffs or across deep crevices. This can be accomplished by improvised cableways, block and tackle, hoists, and winches.

Section VIII. TACTICAL EMPLOYMENT OF CLIMBERS

78. Requirements for Qualified Climbers

Normally, the first units to be committed to operations in mountainous terrain would be those whose personnel have re-

ceived specialized training in the techniques of military mountaineering. Units committed to prolonged operations in mountainous areas, whose personnel have not received this specialized training should have qualified mountaineers assigned to them as advisors. Depending upon the availability of qualified personnel, a number of experienced climbers should be assigned to each platoon, company or battle group sized unit prior to the planned operation.

79. Capabilities and Duties of Climbers

a. To properly perform their duties climbers must be familiar with and capable of—

- (1) Assistance in unit movements in the mountains such as route selection, navigation and techniques applicable to the rugged terrain.
- (2) Free and roped climbing.
- (3) Rope installations such as fixed ropes, use of anchors, vertical hauling lines, suspension traverse, and rope bridges.
- (4) Crossing techniques of mountain creeks with swift currents.
- (5) First aid and evacuation techniques.
- (6) Individual cooking techniques above and below timber line.
- (7) Shelters and bivouacs.
- (8) Snow characteristics and safety precautions from avalanches.
- (9) Assistance in movements over glaciers.
- (10) Characteristics of weather, especially protection from the sudden changes in temperature, high winds, blizzards, thunderstorms, and other adverse effects.

b. Climbers with sufficient training in military mountaineering and considerable experience should be first as guides and advisors to the units involved in mountain operations. They can also be of great value by serving the troops as observers and scouts, performing duties on patrols of various types, and assisting units in assault climbing.

80. Guides

Guides are primarily used as advisers to unit commanders and to assist troops over minor rock obstacles encountered in normally broken terrain. They should possess excellent route-finding and pace-setting ability and a thorough knowledge of the general practice and theory of mountaineering.

a. As advisers they should—

- (1) Suggest best routes of march.
- (2) Inform unit commanders of natural dangers and obstacles likely to be encountered.
- (3) Be prepared to estimate the time and means necessary for the movement of troops or equipment between any two given points.

b. In assisting troops they should—

- (1) Maintain a steady pace at the head of the column, to prevent bunching and straggling.
- (2) Help maintain proper march discipline with respect to pace, cadence, and distance.
- (3) Be stationed at obstacles along the line of march directing troops and indicating alternate routes over bottlenecks.

81. Observers and Scouts

a. The rules for the selection of scouts and observers (FM 21-75) hold true in the mountains. To the characteristics and abilities normally required of a scout must be added agility and thorough training in military mountaineering. The scout should also have a thorough grasp of mountain terrain and terminology, so that he can make accurate sketches and reports of his observations.

b. Scouts will ordinarily function in pairs. When a scouting mission requires crossing of precipitous terrain, appropriate climbing equipment will be carried.

82. Reconnaissance Patrols

a. Reconnaissance patrolling over precipitous rock terrain may best be accomplished by small patrols of one or two pairs of trained climbers.

b. Climbers may be used in day or night reconnaissance. Allowances must be made for the added difficulty and reduced speed of night climbing.

c. Expedients for party climbing will be found helpful in the execution of night patrols and will permit inclusion of agile nonclimbers in the patrol. Addition of nonclimbers will, however, greatly decrease the speed of movement.

83. Flank Patrols

a. Climbers may expedite movement of flank security elements over difficult rock terrain. One or two climbers should be attached to each element, depending on the size of flank elements and the difficulty of movement.

b. When ruggedness of terrain is likely to enforce a rate of march on the flanks that is slower than that of the main body, flank security personnel should be grouped near the advance party. Smaller elements are then detached as necessary to reconnoiter and hold dominant terrain features on the flanks of the line of march. Flank outposts join the main body and proceed forward to rejoin the pool of flank elements.

84. Company Assault Climbers in Attack

a. One of the principal missions of military mountaineers will be to lead the attack on a precipitous objective. The forces required to secure this objective from counterattack will generally be small.

b. A suggested standing operating procedure for a company attack is as follows:

- (1) The assault of the cliff will preferably be made during periods of low visibility. If the night is dark, ropes may have to be set up at dusk or just after dawn. The noise of the movement may be covered by direct and indirect fire. undefended points should be selected for the attack. The use of at least two separated points increases the likelihood of success.
- (2) Before the attack, a complete daylight reconnaissance by the company assault team is desirable. If possible, six routes should be chosen covering a front of from 200 to 400 yards. Of these, the two easiest routes should be picked for the installation of the first two ropes. Concealed locations for mortars are chosen and range cards prepared in advance. Platoon assembly areas are selected and routes to the foot of the cliff decided upon.
- (3) Under cover of darkness, the company moves into its assembly area. Mortars go into position to deliver unobserved fire if the attack should be detected. Local security is posted around the assembly area. The best adapted men are selected to climb the first rope. They are lined up back from the foot of the cliff and under cover. The assault climbing team will initially set up two ropes at points as far apart as possible to give dispersion and still retain control. Numbers 1, 2, 3, and 4 will establish one rope and numbers 5 and 6 the other.
- (4) At the hour of the attack, numbers 1 and 2 climb the cliff, anchoring their climbing rope at the top, and immediately move out to provide security. Numbers 3

and 4 follow as closely behind number 2 as possible, place pitons, and secure the first line. Numbers 5 and 6 climb to the top, place their pitons over a different route, and secure their line. They then set up a hauling rope.

- (5) Six riflemen selected for their agility follow number 4 up the fixed assault rope and relieve numbers 1 and 2 as security. The riflemen are followed by two observers with radio and wire reel to direct supporting fire. As soon as the hauling rope is set up, automatic weapons are hauled up and put in position to protect the climbing of the main body.
- (6) When a rope has been established, one assault climber remains at the rope to service the line and to aid the inexperienced climbers up the route. The other climbers will set up other ropes until four to six are in position, depending upon the ease of installation. At least two of the routes should have hauling lines which can be manned by inexperienced men.
- (7) Following the observers and the automatic weapons, a rifle platoon is moved to the top as rapidly as possible. It reorganizes at the top and takes up a defensive position that will protect the climbers from observed small arms fire. The platoon leader commands all troops at the top of the cliff and integrates the direct and indirect fire.
- (8) The assault platoon is followed by the company headquarters, artillery liaison party, ammunition, and the remaining riflemen. The 81-mm mortar units and their rifle security are the last troops to climb the rope. The ropes may be left in position for moving supplies or evacuating wounded, or may be taken forward to aid in the continuation of the attack.
- (9) In using the above standing operating procedure, prior detailed planning and careful organization are essential to success. When additional ropes or climbers are required, these should be attached from other companies within the battle group. The initial troops to climb the cliff, including the first platoon, should climb with only their weapons and a minimum of ammunition. The remainder of their equipment will be brought up by hauling lines.

85. Combat Patrols

a. The climber team should be the nucleus of patrols operating over precipitous terrain. Nonclimbers may be added in varying proportion according to the estimated climbing difficulty and mission.

b. If more than one point of attack is to be used, or a more powerful patrol is needed, additional climbing teams can be employed.

c. Patrol leader should be familiar with abilities and limitations of company climbers. He should be a trained climber.

d. Nonclimbers should be selected with careful consideration of their natural agility and endurance.

CHAPTER 3

EMPLOYMENT OF THE ARMS AND SERVICES

Section I. INFANTRY

86. Tactical Principles

a. Infantry, because of its versatility, self-sufficiency, and mobility, will play the dominant role in mountain operations. Small units must be capable of operation under decentralized control. The individual soldier must be dependable and resourceful when separated from his immediate superior.

b. As in flat country, infantry acts by means of fire, shock action and maneuver, but this method has a somewhat different application in the mountains. In general, the effect of fire is less than in average terrain since mountainous regions offer considerable natural cover such as rocks and cliffs. Maneuver is constantly hampered by the difficulties of the terrain, and fire support from adjacent units cannot always be counted on. Movement will usually take the form of individual infiltration or successive rushes by small groups for short distances.

87. Factors Governing Use of Weapons

In the employment of infantry weapons the following factors must be taken into consideration:

a. The use of overhead and long-range fire can be greatly increased due to the great differences in elevation and the good observation afforded.

b. The slopes of the terrain greatly affect range estimation. An observer looking downward from a height tends to underestimate the range; an observer looking upward from low ground is likely to overestimate the range.

c. The steepness of slopes and irregularities of the terrain counteract the effect of the grazing fire of automatic weapons and limit the extent of beaten zones.

d. The existence of a great amount of dead space gives added importance to weapons with a high angle of fire, as well as to hand and rifle grenades.

e. The difficulties of ammunition supply make it necessary that all commanders enforce a strict economy of fire.

f. Mutual support from one terrain feature to another is facilitated by good observation.

88. Employment of Supporting Weapons

a. *Machine Guns.* In employing machine guns, frontal fire is the most commonly used and has the advantage of being effective deep in the region through which the enemy must operate. The terrain frequently permits sustained overhead fire. However, the best positions for frontal fire are often the easiest for the enemy to locate and the displacement of weapons on forward slopes is both difficult and dangerous. As the enemy closes in, the great amount of dead space and steep angle of fire render frontal fire less effective. Flanking fire may be delivered from ridges, gulleys, and passes protected from enemy fire and observation.

b. *Mortars.* The 81-mm mortars of the infantry company are indispensable to mountain operation. They may be used during marches, bivouacs and for combat. Mortar fire may be massed through the use of map data, sketches, or M-10 plotting board. In the attack it may often be difficult to provide sufficient ammunition for all of the 81-mm mortars. Under such circumstances it is better to advance fewer mortars. This can usually be determined in advance by considering how far from the nearest road the mortars will be expected to operate.

c. *106-mm Rifle.* In low mountain terrain, where road nets exist, the 106-mm rifle is an excellent, highly mobile weapon. In alpine terrain the 106-mm rifle may be air lifted into position by light helicopter; otherwise it will be limited in use by existing or specially constructed roads as it is extremely difficult to hand carry into position. It may be employed as a direct fire, close support weapon, chiefly against enemy strong points on fortified positions, and as an antitank weapon.

89. Snipers

Due to the fine visibility and observation, frequent opportunities arise when snipers can be used. The development and effective use of snipers should be given special attention.

90. Grenades and Rockets

a. Hand grenades can be used to great advantage in mountainous terrain. Close combat among rocks and cliffs reduces the effectiveness of short-range rifle fire, but increases the effectiveness of hand grenades, particularly when they can be thrown downhill. They are very effective in wiping out machine gun nests and mopping up field fortifications. Men should be cautioned against throwing hand grenades uphill in places where they are

likely to roll back on their own troops. Offensive grenades can be utilized to great advantage in close-in fighting.

b. When the range exceeds that of the hand grenade, the anti-tank rifle grenade and rocket are excellent weapons for use in the neutralizing of pill boxes, bunkers and machine gun emplacements.

Section II. FIELD ARTILLERY

91. Tactical Principles

a. The basic tactical principles for field artillery remain valid in mountains, subject to the limitations imposed by the adversities of terrain and weather encountered in mountains. The field artillery mortar battery is organic to the battle group. The fires of the battery are utilized as directed by the battle group commander. Howitzer batteries organic to division artillery may be attached to the battle group; when this is done, the howitzer battery is normally given the mission of reinforcing the fires of the mortar battery or the howitzer battery may be further attached to the mortar battery. Other field artillery of the division is also available to the battle group on call through the division artillery commander.

b. All types of artillery and missiles can be used in the mountains. Light and medium field artillery may be brought into position with the aid of trucks, tractors, and by use of block and tackle or winches. Light artillery and artillery mortars may be air lifted into positions by the helicopter. The 75-mm pack howitzer due to its maneuverability is particularly useful in mountain warfare. Heavy artillery will be limited to roads and their immediate vicinity.

92. Limitations

a. In mountain warfare, field artillery frequently is forced into decentralized employment because of the limited space for gun positions and the difficulty of fire control. In snow-covered mountains, deep snow will cause a reduced lethality on impact bursts of artillery and mortars. The use of an increased amount of time and variable time fuze ammunition should be considered.

b. Occupation of positions and replenishment of ammunition are much more difficult and more time-consuming than in level country.

c. In order for the field artillery to perform its mission it will frequently be necessary to bring field pieces into positions which can be reached only by manhandling and roping. All gun crews expected to operate in mountains should be trained in knots and lashings.

d. In order for the artillery to provide continuous support it may be necessary to displace more frequently than in average terrain.

e. Artillery mortars emplaced with the aid of helicopters will in all probability require further air support for ammunition supply. The commander must also consider that for displacement the artillery pieces will again have to be moved by helicopter.

93. Coordination With Infantry

Communication between artillery and the attacking echelon of the infantry, and the coordination of its fires with those of infantry heavy weapons require special care. The attacking echelon needs highly effective support up to the very point of penetration. Without such support it is likely to draw fire just before reaching its objective. An infantry attack over rising terrain is easier to support up to the moment of penetration than one over descending terrain, although artillery fire may dislodge rocks which will endanger the advancing troops. In the final stage of the attack, machine guns and infantry may be the only available support.

94. Field Artillery in Pursuit

In a pursuit through mountains, artillery fire is needed to help overcome the resistance of enemy rear guards. In such action the timely resupply of ammunition becomes the critical problem.

95. Field Artillery in Defense

Artillery defensive fires in mountains must be carefully planned and prearranged. Plans should include artillery or mortar fire on the flanks and rear of units. Areas of enemy approach that are in dead spaces for field artillery fire can usually be covered by mortars.

96. Positions

a. Good gun positions are usually few in number. They should be selected for defilade, cover and accessibility to road nets. In general, gun positions on commanding terrain are preferable to low positions; they are better for performing antitank missions, are less exposed to small arms fire from surrounding heights, have less chance of being caught in rock slides or avalanches and reduce the amount of dead space in the target area. Care must be taken, however, that positions on commanding terrain have defilade. When speed in the occupation of positions is essential, a unit must often take the most convenient available position, even a stream bed or the road itself. Reconnaissance for better positions should be continuous and intensive. Camouflage nets

should always be used in open terrain. All men, vehicles, and equipment in proximity to gun positions should be kept in defilade.

b. When time is available, positions should be prepared with complete survey, including dead space charts. Wire communications should be installed or a complete plan and reconnaissance made for their installation. Radio nets should be tested in their selected location. Gun positions should be completely prepared with emplacements, ammunition pits, dugouts for personnel, posts for sentinels and complete camouflage. An initial supply of ammunition should be stored at the gun positions. Routes of approach should be pioneered and improved. Observation posts should be selected and prepared. Firing data should be prepared for all probable targets. Finally, a complete standing operating procedure for occupation should be developed and rehearsed in advance.

97. Observation

a. Observation posts should normally be on the highest practicable points. Care must be taken, however, to echelon them in height in order to avoid the possibility of all observation posts being blanketed by layers of clouds or fog. At least two forward observers per firing battery are desirable. In heavily wooded terrain, forward observers and liaison officers should be supplied with lineman's climbers.

b. In order that forward observers may reach the best points of observation, it is often necessary that they be qualified assault climbers. Forward observers and liaison officers and their parties, trained in assault climbing, can accompany the infantry in ascending and descending the most difficult mountains.

98. Use of Vehicles

a. Motorized artillery will be confined to roads and trails. Since this road net is usually very limited, it is often advisable to strip batteries of as many vehicles as can be spared. Since the limited road nets of mountainous regions are especially vulnerable to enemy artillery fire and aerial bombardment, infiltration should be the normal method of march. It is often difficult to turn vehicles around on mountain roads; hence security and reconnaissance elements should be far enough ahead to determine the advisability of moving beyond each turnaround point.

b. Self-propelled artillery, although able to negotiate sharp turns and capable of ascending and descending steep slopes, is hampered by tracks slipping on icy roads. This disadvantage may be partially overcome by the use of grousers.

c. When there is sufficient traction, prime movers with howitzers in tow can be driven down most grades. The vehicles should be placed in lowest gear. A man with a large chock, stationed beside each wheel of the truck and howitzer, provides emergency stoppage for the vehicle. Two men should apply the howitzer brakes, keeping them as tight as possible but not letting them skid the wheel. A rope should be fastened to the uphill end of the howitzer to prevent it from "jackknifing."

d. When the ground becomes too slippery or the grade too steep to provide traction all prime movers and howitzers must be lowered by block and tackle or winch. In lowering by winch, care must be taken to see that the automatic brake does not overheat. Slow operation of the winch and proper adjustment of the automatic brake will prevent this condition. In all descents and ascents, weather and the steepness of the grade will be the limiting factors.

99. Targets

Because of the difficulty of supplying ammunition, the selection of targets and the allotment of ammunition are of great importance. Care must be taken to avoid wasting ammunition on unprofitable targets. Because of the decentralized nature of mountain operations, targets warranting great masses of artillery fire may be fewer than in other terrain. One type of target which will be especially profitable, however, is a narrow defile which is being used as a route of supply, advance or withdrawal by the enemy and upon which interdiction fire or heavy surprise concentrations can be placed. Another type of target often found in the more precipitous mountains is that presented by a large mass of snow or rocks above enemy positions. Such masses can be converted into highly destructive rock slides and avalanches by artillery fire.

100. Communication

The two principal means of communication, radio and wire, should be supplemented by visual signaling. Manportable FM radio sets should be used for the observer and survey parties and for liaison to the supported unit. Intelligent and energetic use should be made of all available means of communications.

101. Fire Control

a. The problems of gunnery in mountainous terrain are characterized by large angle of site, large areas hidden from observation, and the increased amounts of dead space.

b. High-angle fire should be employed to the fullest extent.

c. The great majority of artillery fires in the mountains must be observed, especially close support and defensive fires. Unobserved fires are generally unreliable as meteorological conditions change rapidly and registration corrections for high-angle fire are valid for only short periods. Accurate transfer of fires is difficult since altitudes within transfer limits vary so greatly. If an observed firing chart is prepared without the aid of survey, the gun positions should be plotted on adjusted quadrant elevations as this will best account for the variance in site between targets and batteries. A grid sheet based on an accurate survey is the best firing chart. Survey should be initiated as soon as possible. Registration on numerous check points is essential.

d. Care should always be taken in measuring minimum elevation for all parts of the battery's zone of fire as all high points may be occupied by friendly observers.

102. Air Defense Artillery

a. Air defense artillery missions in mountains are the same as those in other terrain, subject to modification of techniques caused by climate, terrain, and nature of the operations. Lack of roads may reduce mobility and make resupply operations more difficult. Extremely cold weather causes longer warmup times for electronic equipment, use of special heating devices for ready missiles, and, in gun units, it may be necessary to exercise weapons at frequent intervals. Helicopter lift capabilities should be utilized for resupply of missiles, ammunition and rations.

b. The types of air defense artillery units employed in mountain operations are dictated by mission, terrain, and available transportation. TOE often must be augmented to accomplish the assigned mission. Personnel and equipment must be made available well in advance to permit training under conditions similar to those anticipated in mountain operations. Winterization and modification of equipment where necessary should be accomplished prior to entrance into mountainous areas.

c. Air defense artillery positions should be selected for their tactical utility and consideration of the logistical factors involved. Air defense missile units should, if possible, occupy previously prepared positions. Light air defense artillery weapons mounted on full track vehicles may occupy hastily prepared positions and effectively accomplish their mission. In adverse terrain, or under winter conditions, it may be difficult to dig in positions. Explosives may be used to expedite protection of the position, or parapets may be built up from logs or from ice and snow. Alternate positions should be chosen early and prepared as time permits.

d. Signal communications between fire units and the Army Air Defense Command Post (AADCP) will normally be by wire and backed up by radio. Army aviation may be used to lay wire over otherwise inaccessible terrain. Masking of radio reception in mountainous areas is a factor to be considered.

e. Both friendly and enemy forces will use aviation to overcome lack of roads, strengthen signal communications, improve target acquisition, and to move and support small units. The SP 40-mm M42 is designed to counter light aviation as well as low flying high performance aircraft. As forward area weapons units become available, they will be used to provide protection against all types of aircraft at low or medium altitudes.

f. Surface-to-air missile units using nuclear warheads provide protection from any high altitude threat. Due to the electronic type equipment for air defense artillery fire control systems, personnel must attain a high state of training to perform efficiently in mountain operations. Heated shelters may be required for maintenance personnel to perform their duties. Generators, fire control equipment, and launching equipment must be operated at frequent intervals under extreme weather conditions.

g. Commanders whose force includes air defense artillery guns should not neglect the secondary ground support role of these weapons. These high velocity guns are effective in the elimination of prepared positions such as bunkers and pill boxes, and provide additional harassment to enemy personnel. NIKE-HERCULES missile units also furnish a surface nuclear capability, in addition to their primary air defense role.

Section III. ARMOR

103. General

a. Mountainous terrain generally limits the use of armored vehicles to roads and trails. Small areas may be found where armored vehicles can get off roads and fight across country, but these areas usually are few in number and may be mined. Many times a small amount of engineer work will permit tanks to move to advantageous firing positions in the roughest types of terrain, thereby gaining tactical surprise. The normal mission of tanks in mountain operations is to furnish support either by direct fire, by counterattack, or by antitank defense.

b. Adequate logistical support for armor units engaged in mountain operations is extremely difficult. Roads are usually few in number and require a great deal of maintenance. It is often necessary to use helicopters to effect resupply.

c. Mountainous terrain presents many communication problems. Radio communication, particularly on FM sets, may be affected by high ground between stations. It is difficult to lay field wire. Radio communication must be improved through the use of relay and retransmission stations. Ultra-shortwave equipment, if available, is more effective in mountains than other types.

104. Employment

a. In mountainous terrain, an armor attack must be planned in minute detail. The nature of the terrain may permit tanks to support attacking infantry with relatively long-range direct fire. This requires excellent radio communication and thorough coordination between the infantry and tank units.

b. Key terrain features are primary objectives. Attacks along low ground are usually costly because the defender has excellent observation. The route of an attacking force normally will be along ridge lines or on other elevated terrain. On such terrain, the attacking force in many cases will gain tactical surprise. A great deal of engineer work may be required in order to place tanks on high ground where they can closely support the attack. It may be necessary to build a trail from low ground to the attack position. When mountainous terrain contains corridors which are favorable to the attack and which permit employment of armor, armor may attack down the corridors while infantry units attack along the ridge lines.

c. Available roads and trails must be kept in as good repair as possible, to permit the movement of armor. Tank dozers and bridging material must be kept well forward.

d. No more armored vehicles should be taken forward than are required for immediate operation. Having uncommitted armor vehicles in forward areas causes unnecessary damage to roads and may create traffic hazards for resupply vehicles.

e. If decisive armor action becomes possible, the armor forces are committed in mass, closely supported by artillery and engineers. Objectives are usually critical points on the hostile routes of supply and withdrawal, the capture of which would isolate the enemy forward position.

Section IV. ARMY AVIATION

105. Characteristics

a. The tactical two-place Army airplane is light in weight. It can maintain a constant observing altitude at speeds as slow as 50-60 miles per hour, but it can also reach cruising speeds of

90-105 miles per hour for flights on more extended missions. The design characteristics permit this airplane to operate in and out of small, hastily prepared air strips.

b. The multiplace utility and light transport airplanes are provided primarily for tactical missions, with a secondary capability of supporting administrative needs. Like the tactical two-place observation airplane they too have the capabilities of slow flight, higher cruising speeds for more extended missions and design characteristics which permit them to operate in and out of small, unprepared strips not a great deal longer than those needed for the observation airplane. They also have greater range.

c. The multiplace command airplane is used chiefly in an administrative role. Its missions require flights over greater distances than those required of the tactical two-place airplane. Generally, it operates between improved airfields; however, it is capable of operating on relatively smooth, unimproved sod fields.

d. The helicopter is the most versatile of the types of Army aircraft now available. Its speed ranges from zero to approximately 100 miles per hour. It can rise and descend at exceptionally steep angles, hover over a point and fly forward, backward or sidewise. These flight characteristics permit it to operate from landing areas barely larger than its own dimensions.

106. Air Operations

When formulating plans for operations in the mountains, the possibility of sudden changes in weather must be considered. Alternate plans are prepared and alternate positions for air-transported forces are selected in the event the first choice becomes unattainable due to adverse weather. Large landing zones are rare because of rough terrain; therefore, if a large force is to occupy only a few terrain features, it may have to be shuttled into position. Transport helicopters can place a security echelon on critical heights and at distances unattainable for troops moving on the ground. Within their altitude limitations, helicopters are valuable as movers for direct fire support weapons. They can move these weapons to dominating terrain. Army aviation can be used to provide observation over wide areas in defilade from friendly forces and to perform surveillance missions between friendly strong points. Dead spaces in radio reception may be overcome by establishing aerial radio relay stations and aircraft may be used to lay wire over otherwise inaccessible terrain.

107. Employment of Helicopters in Mountain Operations

a. General.

- (1) In mountain operations, terrain limits ground mobility and makes logistic support difficult. Helicopters may be used to facilitate troop movement and to effect logistic support beyond the capability of other means. The initial planning staff for mountain operations should include the unit aviation officer.
- (2) The principal tactical advantages of helicopter employment in the attack are rapidity of movement, surprise, flexibility and operational depth.
- (3) The employment of helicopters for mountain operations does not require any major change in proven principles. Decisions as to the utilization of helicopters for tactical and logistical purposes, the extent of the utilization and priority of use are command decisions.

b. Special Considerations.

- (1) Due to the high altitude, helicopter operations in mountainous terrain are characterized by a decreased lift capability compared to that attainable at lower altitudes. When computing lift capabilities, the ability of the helicopter to operate at the point of discharge must be a determining factor. A helicopter, capable of lifting a load at a lower altitude, may not be able to execute a safe landing at a higher altitude.
- (2) In mountain operations, helicopters may take advantage of the protection afforded by terrain, thereby reducing vulnerability to ground fire and air attack and permitting the attainment of surprise.
- (3) Helicopter operations in mountainous terrain may require frequent use of maximum power setting, which in turn causes abnormal engine wear. Because of this frequent use of maximum power setting additional attention to preventative maintenance is required. The characteristics of the lines of logistical communication in mountain operations may require that major maintenance be conducted at rear bases.
- (4) Cargo handling may be difficult due to mountainous slopes or limited landing site areas. Extensive use of sling loads, power hoist and free drop technique may be necessary.
- (5) Landing sites may be limited in area, thus reducing the supply and or evacuation rate per loading site.

- (6) Helicopters usually have an increased lift capability in cold weather. However, it must be remembered that even in cold weather as altitude increases air density decreases, causing a loss of engine power and a reduced amount of lift on rotor blades.
- (7) Severe cold sometimes encountered in mountainous areas complicates helicopter maintenance and supply. Special shelters are required for maintenance personnel, while engines require an external source of prestart power and heat. Engine operations may be hampered by improper fuel vaporization and icing. Frost may form on aircraft surfaces. Landing gear not kept on dry surfaces may freeze in place.
- (8) Special equipment used for helicopter operations in the cold includes: skid type landing gear, winterization kits, external heaters, engine preheaters and external power sources.
- (9) The above considerations are not intended to underrate the capabilities of the helicopter in mountain operations, but to emphasize the requirement for specially trained aviation personnel to operate and maintain the aircraft and to advise the commander on their use.

108. Landing Site Selection and Preparation

a. Landing Site Selection Considerations.

(1) Concealment.

For most effective helicopter operations, landing sites and flight approaches thereto should be shielded from enemy observation, either by masking terrain or wooded areas. If it is impossible to conceal helicopter activity with these natural terrain features, it may be necessary to lay smoke between the site and possible enemy positions during the time the site is in use. Consideration should also be given to the employment of camouflage devices to deny the enemy the capability of locating landing sites by aerial observation.

(2) Location.

Landing sites should be located in such a position that risk of encirclement or infiltration by the enemy is held to a minimum. Landing sites that are to be used primarily for supply and resupply should be located in close proximity to desirable storage or dump areas to minimize ground movement of cargo after it is delivered.

(3) *Size.*

Appropriate landing site size is determined by the type and number of helicopters to be accommodated. Both rotor diameter and wheelbase must be considered when choosing landing sites. Even though the helicopter's landing gear will rest on a relatively small plot of ground, a larger area clear of obstructions is still required to preclude the possibility of damaging the rotor(s).

(4) *Approches and exits.*

It is undesirable to establish landing sites in locations that require vertical ascent or descent by helicopters operating from them. Helicopters require a rather large amount of reserve power to climb vertically after take-off or to control a vertical descent; and this of course, decreases allowable payload. As an example, to permit more effective use of helicopters, paths of approach to and exit from landing sites should be at least as wide as the rotor diameter of helicopters operating from them plus an extra margin of 50 feet. These paths must be clear of communication wire and all other obstacles. There should also be an area clear of high obstructions (30 feet or higher) extending at least 150 feet in the direction of approach and exit paths (300 feet if the landing site is situated where it is likely to be sheltered from prevailing winds). This gives the helicopters an opportunity to gain forward velocity before they have to commence extended climbing.

(5) *Takeoff and landing direction.*

Since helicopters can take off and hover with less power (hence more allowable payload) when they are headed into the wind, landing sites should be selected that provide adequate space for helicopter pilots to maneuver into the wind in order to take advantage of its effect.

(6) *Soil condition.*

Dry, barren areas of ground should be avoided if possible because dust clouds created by rotor blast may reveal helicopter activity to the enemy. Also, such dust clouds will tend to blind the helicopter pilot and ground personnel in the vicinity. These unfavorable conditions also exist when operating in snow. In general, areas of hard ground, solid rock or grass are the best natural landing areas for helicopters.

(7) *Topography.*

Landing sites, to be utilized for continued or repeated operations, should be as flat as possible (slope gradient not to exceed 4°). Slopes of 4° to 20° (cargo helicopters) or 4° to 10° (observation and utility helicopters) may be satisfactory landing sites on an emergency basis by utilizing proper landing technique. Touchdown hovering (a procedure whereby 1 or 2 wheels are placed on the ground but a full landing is not executed) may be accomplished on sloping terrain in excess of this. Extreme caution must be exercised in the performance of this type of operation. The limiting factors in this maneuver are density altitude, gross weight (the aircraft must be able to accomplish hovering) and sufficient ground clearance for the rotor system which must remain horizontal.

(8) *Obstacles above ground.*

Type aircraft	Landing site	Obstacles
H-13, H-23	20 yds. by 20 yds.	For each foot of rise of an obstacle a distance of 15 feet is desired from the point of takeoff or landing.
H-19, HU-1	30 yds. by 30 yds.	
H-21, H-34	30 yds. by 50 yds.	
H-37	50 yds. by 70 yds.	

b. Preparation of Landing Sites.

- (1) The amount of effort exerted toward improving landing sites will depend on their intended use. The procedures discussed here are primarily for sites in forward areas that are to be used infrequently or possibly for only one emergency mission. Even though no elaborate preparations are necessary for this type of operation, the unit commander should realize that the state of development of sites adjacent to his unit will greatly influence the reliability of support he receives from helicopter units. Inasmuch as site locations seldom will be found that satisfy all requirements, some preparation will usually be required.
- (2) If trees must be cut to clear a landing site or approaches thereto, stumps in the immediate vicinity of the landing spot must be cut level with the ground because of the possibility of puncturing the bottom side of the helicopter fuselage. Also, it is seldom desirable to prepare a wooded area by burning because of the dust problems that will be created.

- (3) Landing sites may be prepared on the sides of hills by blasting a ledge. However, the slope gradient mentioned in a(7) above must be considered when preparing such sites.
- (4) Even though the terrain surrounding the troop unit's position is hilly and wooded, a suitable landing site still may be prepared. First, enough trees are felled in the vicinity to provide a clearing for the site. These are then wedged among the stumps on the lower side of the slope to provide a foundation for the site. Earth above the proposed site is then dug out and filled in around the tree trunks on the site. Care must be taken to insure that the filled-in portion is solid enough to support the weight of a cargo helicopter. For security reasons, the site should not be cleared or filled more than necessary so that its position will not be easily detectable by the enemy. Nor should the ground be dug up unnecessarily, thereby creating a dust hazard.
- (5) Sites in cleared areas, fields, deserts, and roadways are easily prepared for landing. However, when extremely dusty conditions prevail, it may be desirable to prepare the ground with oil or some other form of soil stabilizer. Small trees are felled, holes filled in or marked, and all loose rubble or objects cleared from the area. Loose objects such as inadequately secured panels may be drawn into the rotor system and cause damage, or loose rubble or debris may be blown against personnel on the ground resulting in injury.
- (6) It is especially important that all communication wires strung between trees or across valleys in the vicinity of landing sites be removed or lowered to the ground. If the wires are in use and cannot be strung along the ground, they must be marked. This can be done with strips of cloth of highly contrasting color hung across them at intervals so as to make them clearly visible to the pilot during takeoff and landing but not exposed to enemy observation.

c. Landing Site Marking.

- (1) A boundary is outlined around the usable portion of the landing site and may be constructed of materials at hand that have definite color contrast with the surrounding terrain. Appropriate materials include standard cloth panels, whitewashed rocks or logs, partially buried cans, lights, and flares. Any devices used need

to have sufficient weight or be adequately anchored to prevent their being blown around by rotor blasts.

- (2) A method of identifying the unit occupying the site also is desirable. The method to be used is set forth in unit SOI's. Identifying marks may consist of a number coded symbol that indicates the site number and the unit occupying the site. If possible, landing site identifying marks are elevated to make them plainly visible to low-flying helicopters, or of sufficient size to permit recognition from a distance of about one mile, and are made of highly contrasting material to permit easy location. When landing sites are not in use, it may be desirable to remove boundary and site identification markers to avoid location by the enemy.
- (3) Each landing site should be equipped with a means of indicating wind direction and velocity. Two possible methods which may be employed are—
 - (a) A piece of lightweight cloth, having color contrast with the local terrain, mounted free of obstructions several feet above the ground.
 - (b) Smoke grenades placed in a spot where the smoke does not obscure the landing site from the helicopter pilots.

d. Reporting Establishment of Landing Sites. When a unit establishes a landing site, it should immediately report its completion to the appropriate aviation and ground command. A map is normally maintained indicating all completed landing sites. All units concerned are informed of the identifying mark assigned each site as well as its location by grid coordinates.

Section V. ENGINEERS

109. Mission

a. The conditions of mountain warfare require that a large proportion of troops be engineers. Great emphasis must be placed on routes of communications, and defensive measures are also usually of measured importance. Mountain roads and trails require extensive construction, improvement, maintenance, and repair to withstand the increased traffic and severe weather conditions. The lack of local material and the difficulty in operating heavy engineer equipment, coupled with enemy defensive activities such as destruction of bridges, construction of obstacles, and emplacement of mines complicate and increase the problems of maintenance and construction. Stream crossing operations become extremely difficult and must often be accomplished by ex-

pedient means. In extremely rough terrain, cableways and tramways often offer the most dependable means of supply and evacuation.

b. Engineers may assist in the organization of the ground and the layout of defensive positions. Well planned demolitions, both conventional and nuclear, obstacles, and mine fields are especially profitable in mountain warfare because of the difficulties encountered in their reconstruction and removal. Engineers will be extensively employed in these operations. Positions constructed in rock are strong and offer good protection but require considerable time and equipment. Most mountainous areas are poorly mapped and recovery and establishment of geodetic control is often a major problem. Other engineer missions which are emphasized in mountain operations include the construction of shelters, provision of landing strips, and, in some areas, supply of potable water. In order to efficiently accomplish the work assigned to them, engineers must be supplied with mechanical aids such as compressors, power drills and saws, bulldozers, large amounts of explosives, and adequate transportation.

110. Training

The training of engineer troops in mountain operations should include, but not be limited to the following:

- a. Rigging demolitions in rock formations.
- b. Tramway and cableway construction.
- c. Camouflage, (especially in snow areas).
- d. Physical conditioning.
- e. Assault climbing.
- f. Mountain road construction.
- g. Use of helicopter aircraft in engineer operations.
- h. Stream crossing operations, including the use of expedients.
- i. Fixed and floating bridge construction.
- j. Obstacles.
- k. Mine warfare.
- l. Field fortifications.
- m. Water supply.

111. Engineer Reconnaissance

Engineer reconnaissance should precede all operations but not delay them. Rugged mountain terrain makes field reconnaissance time-consuming and dangerous. Aerial reconnaissance is emphasized, although small dismounted details may be successful. Terrain analysis for routes, trafficability, and local materials is of special importance in mountain warfare. Specially trained engineer terrain analysts furnished with reconnaissance informa-

tion and air photo coverage have the capability of furnishing information quickly and with a wealth of detail unavailable by other means. Relationships between vegetation and soil conditions resulting from terrain evaluation aid the engineer in his determination of trafficability and sources of materials. Stereoplotting instruments are used to furnish contour maps, while special engineer intelligence overlays may be prepared to give information of trafficability, construction sites, and materials.

112. Road Construction

a. Development of extensive road systems in mountainous regions should be avoided. Initial plans for road nets should include the improvement of existing roads and trails. Trails will normally be developed or improved to accommodate, initially quarter-ton trucks, and eventually, heavier vehicles. Turnouts installed every quarter mile, or more frequently, will reduce traffic congestion on single lane roads or trails (TM 5-250).

b. The construction of roads in mountainous terrain is one of the most important duties of an engineer unit. Roads should normally follow contour lines and avoid crests of ridges. However, in mountainous areas, terrain, weather, and other overriding reasons often require the use of crestlines for roads except when the tactical situation prevents their use. Routes should be selected with special regard to cover and the speed with which the roads can be put into service. Abnormal gradients on roads may be required initially to insure that construction will maintain pace with the tactical operations. Routes should bypass marshy spots and localities which require excessive rock blasting and movement of large boulders. Cut-and-fill type roads on slopes will usually result in the best road and most efficient employment of available equipment. If the road is to be used during the winter, plans for its location and alinement should include consideration for eliminating or minimizing snow drifting.

c. Advantage should be taken of natural routes to reduce the amount of cutting and cribbing. Locally available timber may be used for cribbing both the downhill and uphill side of the road. The air compressor and bulldozer should be used to the fullest extent acknowledging that compressor efficiency decreases with increase in altitude. Drainage should receive increased emphasis due to abnormal slopes, damaging thaws, and heavy rains. Roadbeds on a hillside should be banked to the inside to eliminate cross road drainage and prevent loss of equipment over a bank as a result of skidding.

d. In certain mountainous areas it may often be impossible to make full use of normal engineer heavy equipment in road

and bridge construction, execution of demolitions, and preparation of obstacles. In such cases, reliance must be placed upon hand labor and light equipment. It may often be necessary to add to the normal allotment of hand tools and to supplement or replace construction machinery by special light equipment. The type and quantity of such special equipment will vary with the situation, but can usually be determined by proper prior planning and possible engineer reconnaissance.

e. Accumulations of surface water give considerable trouble to road builders. Localities where it is present should be prepared for drainage, either by placing a culvert across the road, or a heavy subcourse of large stones to allow underground drainage. This condition may also be counteracted by corduroying the road in that locality with timber poles or logs. Maximum use must be made of crossing or bypassing expedients which require little material. Culverts, either prefabricated or built on the spot, and fills may often be substituted for bridges. Special attention will necessarily be given to snow removal during the winter months. This will entail the use of additional engineer troops and snowplow equipment.

113. Bridge and Stream Crossing Expedients

Standard bridges and stream crossing expedients are described in FM 5-10 and TM 5-271. Special bridges and other crossing expedients useful in mountain operation are—

a. Branches Covered With Snow. Snowshoe, ski, and foot troops can use branches covered with snow as a crossing expedient to traverse shallow streams.

b. Ice. By laying branches, straw, grass or logs on the ice, damming both sides of the covered area, flooding the area with water, and allowing the area to freeze, ice can be reinforced and used as a crossing expedient (TM 5-560).

c. Rope Crossing (fig. 7). A rope crossing or hand hauling line requires that an experienced mountain climber go ahead to establish the anchor on the far side of the crevice or ravine to be crossed. A snaplink attachment made to the hand and foot rope from a rope around the waist of the man crossing may be used to provide additional security. The construction of a rope footbridge (fig. 8) is fully described in TM 5-279).

d. Suspension Bridges and Cableway. Suspension bridges and cableway expedient bridging (fig. 9) are fully described in TM 5-279 and TM 5-270. Natural anchors are preferable; however, if a tree is to be used, its firmness is of the greatest importance. Trees growing on generally rocky terrain should be treated with sus-

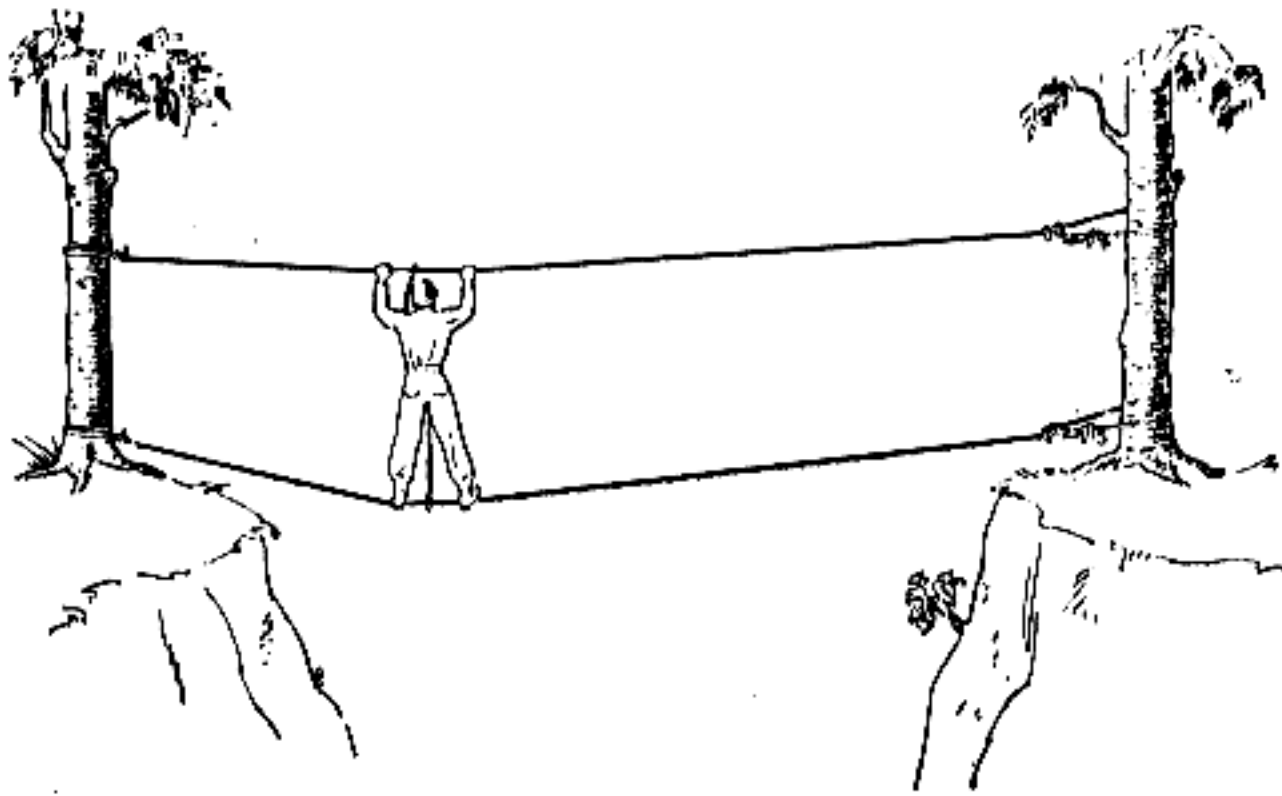


Figure 7. A rope crossing.

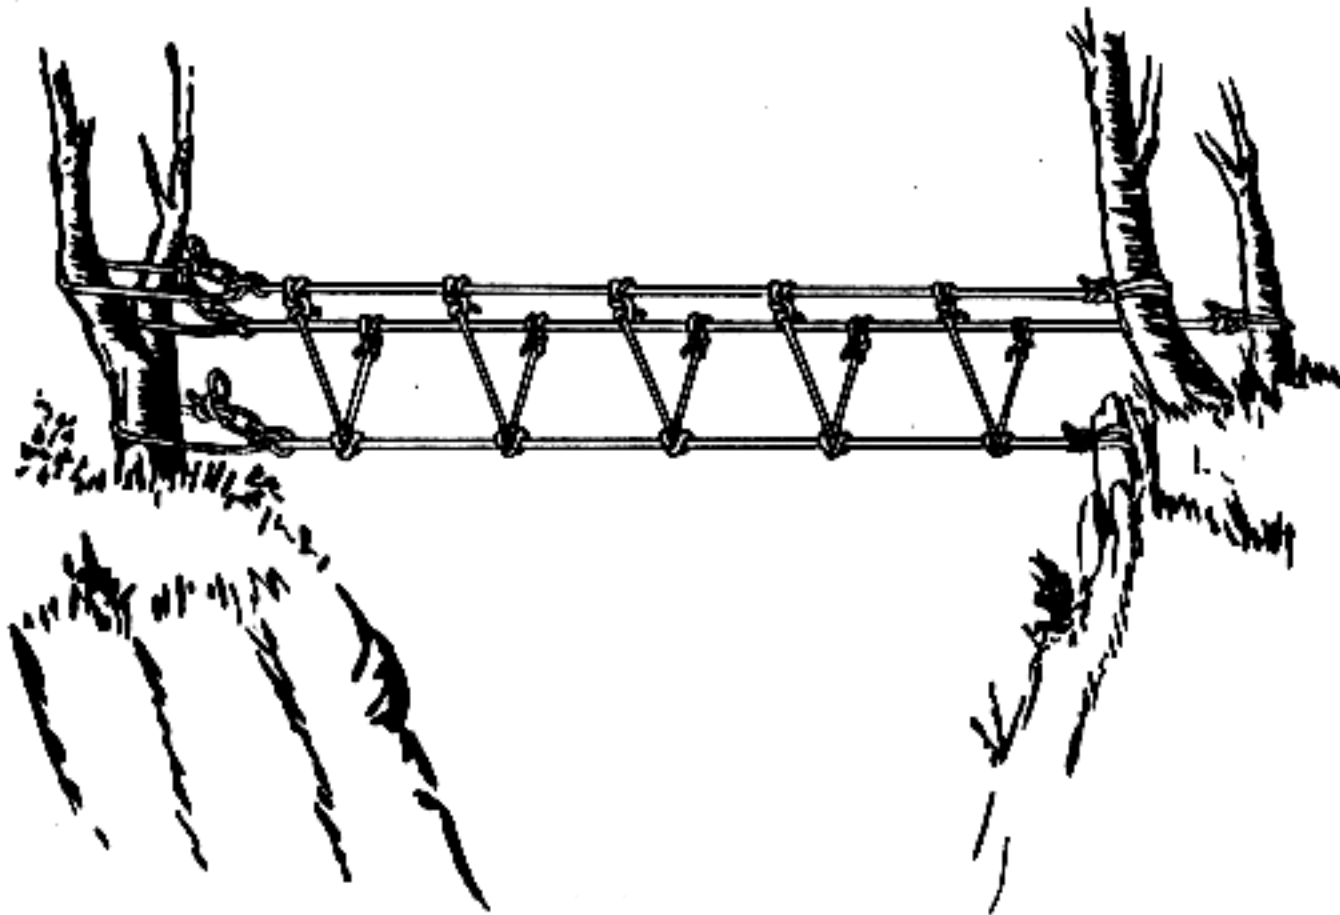


Figure 8. Rope footbridge.

picion since their roots normally are shallow and spread out along a relatively flat surface, in which case additional support will be required.

e. Swiss Bridge. The Swiss single bent (fig. 10) and double bent (fig. 11) bridges are support bridges for infantry and pack trains respectively. This type of bridge, used for crossing mountain streams, and swamp areas, can be constructed quickly from local materials or materials easily hand-carried along mountain

trails. This bridge obviates the necessity of foot troops wetting their clothing and equipment in fords, a dangerous practice during cold weather.

- (1) The bridge is constructed from natural timber spars, 3 or 4 inches in diameter and approximately 20 feet long. Planks or small round timbers can be used as the walkway while wire, rope or vines can be used as lashings.
- (2) The construction crew consists of one platoon of combat engineers divided as follows: one squad as a cutting party, one squad as a carrying party, and one squad as an erecting party.

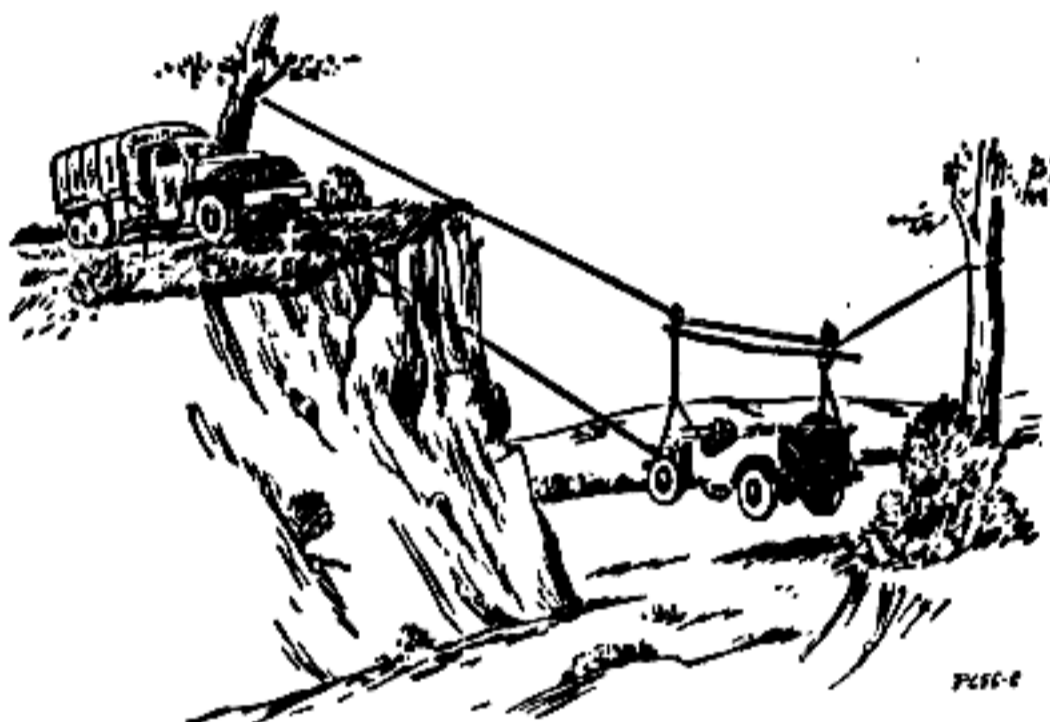


Figure 9. Expedient cableway.

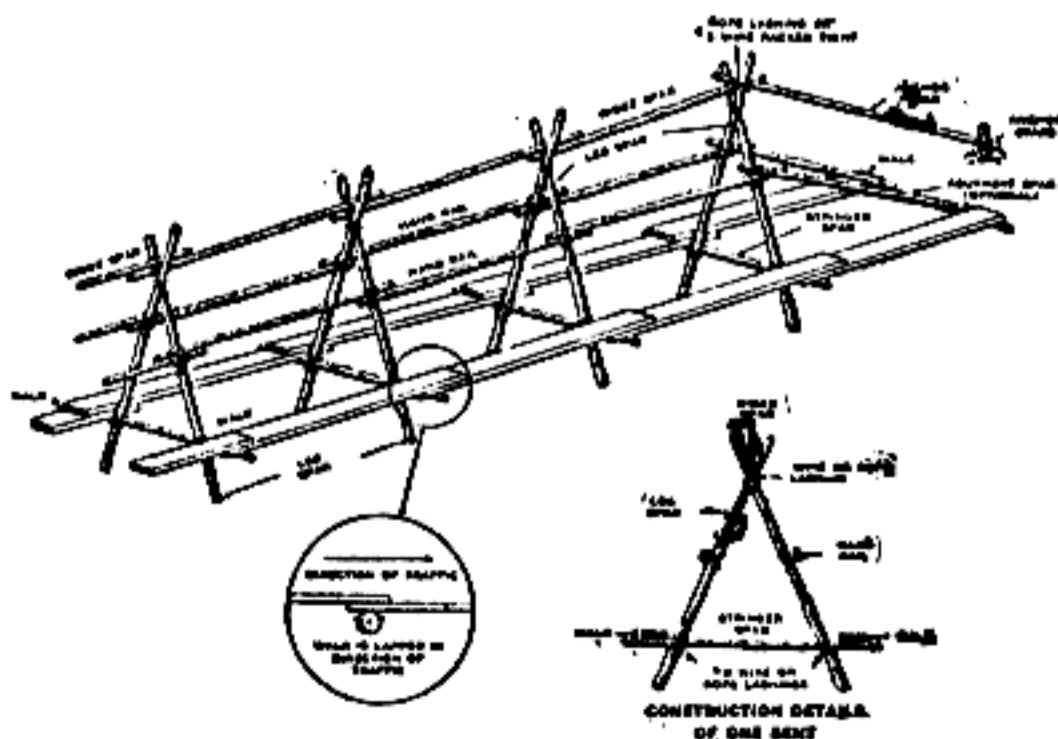


Figure 10. Single bent Swiss bridge.

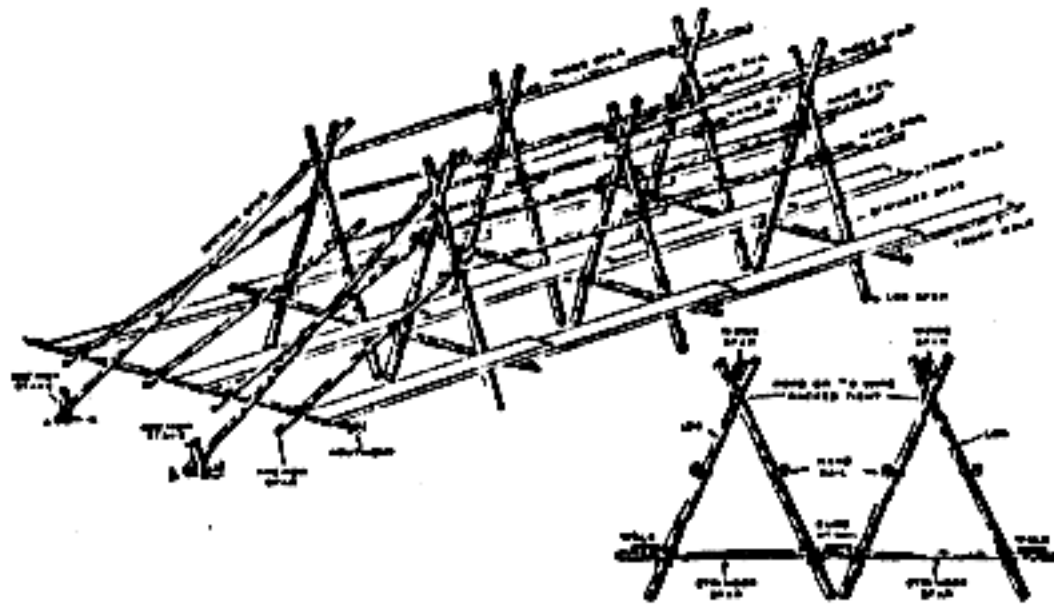


Figure 11. Double bent Swiss bridge.

- (3) The cutting party cuts timber 3 or 4 inches in diameter at the butt and ranging in length from 15 to 20 feet. This party also trims the branches.
- (4) The carrying party cuts spars to length and carries them to the bridge site. Timber requirements are as shown in table I; the quantity of pieces depending on the number of bents to be used.

Table I. Timber Required for One Bent of Swiss Bridge.

	Number of timbers	Length (feet)	Nomenclature
Single bent bridge (foot troops only).	2	15	Leg spars
	1	10	Stringer spar
	1	20	Anchor spar (for end bent).
Double bent bridge (foot troops and light equipment).	4	15	Leg spars
	1	20	Stringer spar
	2	20	Anchor spar (for end bent).

- (5) While the cutting party is obtaining the first spars, the erecting party cuts and sets the anchor stake (or stakes for double bent bridge) at the head of the bridge site on the near side of the stream or crossing. The assembly section digs the trench for the abutment spar, if it is needed. The carrying section assembles walks and lashings at the bridge site. To prepare the first bent, lash two leg spars together about $1\frac{1}{2}$ feet from the top with a shear lashing. When lashing is secure, (1) separate the legs (2) place the stringer spar at a predetermined distance from the butt ends, and (3) lash the legs and stringer spar together using a square lash-

ing. This bent is ready to be placed in position as the first transverse support of the bridge. A ridge spar and the anchor spar are then temporarily lashed to the top of the bent. Additional bents, to the number required, are prepared. The bents are spaced according to the length of the plank to be used as a walk, squared to the center line and raised. The ridge spars are lashed securely to the shear and the walkway is then laid.

- (6) The lashing of one end of the anchor spar at the top of the bent is secured; the opposite end is lashed to the anchor stake. Where two ridge spars overlap, no permanent lashing is placed until both are in position. If no planks are available, round timbers may be substituted as a walkway. Rope is suitable for use as hand-rails.
- (7) *The double bent bridge will stand in deep and swift water without appreciable damming effects, since there are few spars which are in the stream to catch debris.*

114. Demolitions

a. For most demolition work in the mountains, the principles of FM 5-25 are adequate. A few variations are found to apply in the case of hardwood trees and in some types of soil. Blasting a hardwood tree with an internal charge gives excellent results; in such cases test shots should be conducted to determine additional amount of explosives required.

b. For demolition in rocks and rock soils, normal procedure applies, except that fissures are often found which have to be well filled and tamped with earth. A fougasse made with rock and explosive can be very effective if used on routes of approach in valleys. It may be command fired or set off by a firing device.

115. Obstacles and Mines

a. The use of obstacles in conjunction with the natural ruggedness of mountainous terrain can be effectively employed to deny the enemy key terrain locations and to delay and impede his movement. Well planned atomic demolition munitions or conventional demolitions at tunnels, bridges, and sidehill cuts on roads or railroads may require days or even weeks for reconstruction.

b. An attacking force must know in what areas antitank or antipersonnel mines are likely to be used, and be prepared to deal with them. Mechanical mine exploders are of little use in the mountains and there is as yet no substitute for the removal

of mines by hand or demolition in place after they have been located by the employment of detectors, visual inspection, probing, or a combination of all of these methods.

c. In general, a defending force lays antitank mines mixed with antipersonnel mines in the comparatively narrow approaches to its position which are passable to tanks. On slopes not passable to tanks it employs chiefly antipersonnel mines, paying particular attention to logical approaches for foot troops. In mountainous terrain, scattered mining techniques will be utilized more frequently than patterned mining techniques. In all cases mine fields will be sited to effect channelization of enemy efforts.

d. For details of obstacles, and mining laying and removal, see TM 5-220 and FM 5-31.

Section VI. MEDICAL

116. Principles of Operation

a. The principles of operation which control the movement of troops in the mountains as prescribed in FM 100-5 hold true for the medical service as well as for the combat arms.

b. The principles set forth in FM 8-10 should be followed to the extent permitted by the situation, since central control when practicable is more efficient than decentralization. When combat units adopt tactics based on the maneuverability of semi-independent small units, either on the offense or defense, it is essential that the medical service be sufficiently flexible to adapt to the situation. The utilization of organic medical service personnel and equipment must be planned to provide the maximum unit level medical service under the given situation. The tactical situation, the nature of the terrain, and the need for rapid movement along the chain of evacuation, must be considered in planning the employment of unit level medical service.

117. Battle Group Medical Platoon

The battle group, when operating in mountainous terrain, is often decentralized to such an extent that a centrally located aid station may be impractical. In mountain warfare or similar types of operations, it may be necessary to divide the treatment section into two small sections, capable of minimal treatment, which will permit operation of two aid stations in direct support of the battle group. This division will limit the capabilities of the treatment section, and should not be adopted unless impossible to find other solutions to the problems. Additional equipment will be required if such a division of the treatment section is necessary.

118. Aid Stations

a. In mountainous terrain there is usually adequate concealment and defilade to allow the medical platoon to establish the aid station(s) close to the front line troops. If one station is operated, it should normally be located as close as possible to the fighting troops and generally in the center of the battle group area. If the medical platoon is required to operate more than one aid station, each aid station should be given a specified area of responsibility, and located centrally and as far forward as possible in support of the troops for which the station is responsible. The term "centrally located" does not necessarily mean the geographical center of an area. Many factors such as expected casualty rates, lines of drift, roads, or paths for evacuation of the station, terrain features having a direct influence on litter carry, and others, must all be considered in determining a central location for a given area. The following advantages are obtained when proper consideration is given to the location of aid stations:

- (1) Relatively short or easier litter hauls.
- (2) Closer liaison between the front line units and medical establishments in support.
- (3) Closer contact with company commanders which affords greater ease in following changes in the tactical plan.
- (4) Increased rate of evacuation.
- (5) Additional adequate shelter.

b. Casualties will be sorted, given necessary emergency medical treatment, and if designated as evacuees, provided with shelter and warmth until transportation is available. Speed of evacuation is of paramount importance.

c. When the treatment section is divided, it is desirable that the evacuation section be augmented with additional 6-man litter teams. The additional service troops personnel required to augment the medical platoon litter squads may be recruited from all available sources, including the use of indigenous personnel. This augmentation should be completed prior to its actual need.

119. Company Aid Men

As in normal situations, aid men will be furnished to the companies by the treatment section of the medical platoon. The normal distribution for aid men is five (5) per rifle company, one (1) for headquarters and headquarters company, and one (1) per mortar battery. When critically short of medical personnel, this allocation may not be possible. Reallocation of aid men to meet

existing conditions may help in solving this problem. Insofar as possible, aid men should always be attached to the same company to encourage close relationship between them and the men of the company. Emphasis should be placed on training the aid man in hazards of cold and wind, relationship of these factors to the problem of shock, conservation of body heat and improvised methods of providing warmth, to include the construction of small windbreaks and shelters.

120 Collecting Points

a. In mountainous terrain it will often be necessary to consider the establishment of collecting points. These collection points operated by medical aid men, are designated intermediate points along the route of evacuation where casualties may be gathered. Two of these collecting points may be operated by the aid men allocated to the headquarters company of the battle group. Whenever casualties are to be transferred from one type of transportation to another, there is a requirement for a collecting point of this type.

b. Defilade positions are abundant in mountainous areas. Collecting points should be established as far forward as possible, while maintaining an adequate contact between the battle group and the various medical services. A collecting point may be established behind each of the battle group aid stations, or a centrally located point may be operated, whichever will insure the most efficient medical service and provide the greater relief to litter bearer personnel.

c. The litter bearer haul should be kept to an absolute minimum and vehicular transportation used wherever possible. Maximum use should be made of helicopter evacuation, but the battle group surgeon should never limit his plan so that he becomes absolutely dependent upon evacuation by air. Evacuation plans must be sufficiently flexible to insure the accomplishment of the mission when helicopters are not available.

d. Collecting points should be movable and should be placed, whenever possible, away from any difficult terrain. Collecting points along routes of march should not be established routinely, but only if—

- (1) It is certain that these points will be in territory under secure control of friendly forces.
- (2) The number and severity of wounded justifies such a point.

121. Medical Battalion

The tactical problems of the ambulance company and the clearing company of the division medical battalion in mountain operations are similar to those encountered in flat terrain. Lack of good road nets will add to the difficulties to be encountered by the medical battalion. Basically, the clearing company should establish one or more clearing stations in support of the aid station of the battle groups. These should be as close as possible to the stations supported, yet must be situated so as to permit easy evacuation by the units in support. Utilization of the $\frac{3}{4}$ -ton ambulance forward of the division clearing station may, at times, be impossible. Personnel normally employed in this link of the chain of evacuation may then be used as litter bearers or as supervisors of litter bearers furnished from other sources. Problems will arise, but by maximum utilization of personnel and equipment, the division medical battalion can give adequate support to the battle group medical facilities within its area of responsibility.

122. March Procedures

Company aid men accompany their respective companies on any march. By map or route reconnaissance, the battle group surgeon will establish casualty collecting points along the route of march. These collection points should be sheltered areas which have been marked in such a way as to be easily recognizable by litter bearers. Enlisted personnel of the medical platoon will be designated to take charge of these points. A minimum of two men per point should be used. Just prior to the start of the march, the men who have been assigned as collection point attendants will join the head of the column. As the head of the column passes each collecting point, the personnel who have been assigned to the point will drop out of the column and remain at their point until relieved. Specific responsibility of the collecting point attendants should include administering necessary emergency treatment, providing adequate heat and shelter, and required supervision of casualties evacuated to the collecting point. Casualties who are evacuated to these collecting points may be evacuated by ambulances belonging to either the battle group or the division.

123. Equipment

a. Operations in mountains require medical personnel to carry additional equipment. Items such as ropes, pitons, piton hammers, and snaplinks are all necessary for the evacuation of casualties and establishment of treatment stations. All unnecessary items of

equipment including those for which substitutes or improvisations can be made should be left behind. Heavy tentage, bulky chests, extra splint sets, excess litters, and "nice to have" medical supplies should be stored. Such medical supplies, if stored should be readily available to the battle group surgeon by airdrop or other means of transportation upon his request. Medical items that are subject to freezing should not be exposed to the low temperatures experienced in mountainous areas. When freezable items must be man carried, losses from freezing may be reduced by packing chemical heaters with the supplies or by having the individuals carry the items beneath the parka.

b. In order that forward medical installations may be able to maintain a satisfactory level of medical supplies, all personnel, vehicles, and aircraft going toward the front should, whenever possible, carry small amounts of medical supplies and equipment such as whole blood, blood substitutes, dressings, blankets, litters, etc. Equipment and supplies necessary for the establishment of a small aid station can usually be man carried. Smaller supplies and equipment may be rolled in blankets and these rolls either lashed to packboards or carried in partially folded litters. In addition to normal medical items, it is advisable to carry a few shelter halves, two hand axes, two or three nylon climbing ropes, and some snaplinks for each medical station to be established.

124. Shelters

Since the transportation of heavy tentage may be impracticable, shelter for casualties must be improvised in order to prevent undue exposure of the wounded. In the summer or in warm climates improvisation may not be necessary, but since there is a close relationship between extreme cold and shock, medical personnel should always be conscious of the necessity of providing adequate shelter for casualties. Satisfactory shelter may be found in caves, under overhanging cliffs, behind clumps of thick bushes, in ruins, etc., or they may be built using a few saplings, evergreen boughs, some shelter halves, or similar items. The time factor will often have strong influence on the type of shelter used. When casualties are to be kept overnight, a better weather-proofed shelter must be constructed. Detailed information on shelter for cold weather operations may be found in FM 31-70.

125. Evacuation

a. The evacuation of wounded in mountain warfare presents varied problems. In addition to the task of carrying a casualty to the nearest medical installation, there is imposed the difficulty of movement over rough terrain.

b. The proportion of litter wounded to walking wounded is increased in mountainous terrain since even a slightly wounded individual may find it extremely difficult to climb over the rugged terrain. Because of this added exertion and increased pain, it may be necessary to transport a casualty by litter who would normally be able to return to the aid station by himself.

c. In cold weather and in high mountains, speed of evacuation is vital as there is a marked increase in the possibility of shock among battle casualties when injuries occur in extreme cold.

d. Special consideration must be given to the conservation of manpower. Litter hauls must be kept as short as the tactical situation will permit. A litter team is not capable of carrying a casualty over mountainous terrain for the same distance as over flat territory. In order to decrease the distance of litter haul, all forward medical installations should be as close as possible to the troops supported.

e. It is important to be able to predict the number of casualties that can be evacuated with available personnel. It has been demonstrated that when the average terrain grade exceeds 20° to 25°, the four-man litter team is no longer efficient and should be replaced by a six-man team. The average mountain litter team should be capable of climbing 400 to 500 vertical feet of average mountain terrain and returning with a casualty in approximately 1 hour.

f. Another factor to be considered is the problem of evacuation at night. Wounded should be located and evacuated during the day, as many would not survive the rigors of the night on a mountain during cold weather. Night evacuation over rough terrain is generally impracticable and the results are rarely commensurate with the effort. It should be attempted only when the route has been reconnoitered, marked with tracing tape, and a rope hand line installed. If routes are exposed to enemy observation and fire by day, casualties must be removed from the area at night. When required, casualties should be moved only as far as necessary during the night. At the first point affording shelter from enemy observation and fire, a holding station should be established capable of providing shelter, warmth, food, and supportive care. Casualties should be brought from the forward areas to this point, held until daylight, then evacuated further to the rear.

g. The many difficulties of medical evacuation encountered in mountain operations emphasize the advantages of air evacuation of casualties. It cannot be assumed that helicopters or light aircraft will always be readily available for evacuation of casualties from front line areas. Both the helicopters and the light aircraft

which are organic to Army organizations provide faster, more comfortable and, in the end, more economical transportation for casualties than other methods which might be used. The reduction of time lapse between injury and treatment has such a direct effect on the time required for recovery and the final results of the treatment that the use of the most rapid, most comfortable, and the safest means of evacuation is actually mandatory. The fact that airlift may not be available due to weather, enemy capabilities, terrain features, maintenance problems, and others, are the factors that prevent the surgeon from relying almost entirely on aircraft for the evacuation of casualties in rough, mountainous terrain.

126. Plan

The first and most important task, before evacuation can be instituted, is a thorough reconnaissance of the terrain features and the road network in the area. To this information is added a consideration of the prevailing climatic condition, the facilities and personnel available, and the tactical mission. Only after all these factors are assembled and evaluated can a sound medical evacuation plan be formulated. The following factors, peculiar to mountain operations, should be given consideration prior to making the final selection of evacuation routes:

- a. Snow and ice are firmest during the early morning hours.
- b. Glacial or snow fed streams are shallowest during the early morning.
- c. Channels of mountain streams afford poor routes of evacuation because of rough slippery rocks and the force of the moving water.
- d. Talus slopes should be avoided as they are difficult to traverse. Loose and slippery rocks on such slopes will often cause litter bearers to fall, drop the casualty, with possible injury to all.
- e. When possible, routes should be chosen just below the crest of a ridge since these trails are usually easiest to follow and the ground affords the best footing in such areas.

127. Principles of Evacuation

a. The methods of evacuation described in later paragraphs are not necessarily the only methods to be employed. Although they have proven themselves to be satisfactory, they are all subject to improvement and should be discarded as better methods of handling casualties are developed.

- b. In evacuating a casualty from mountainous areas—
 - (1) Select the smoothest available route.

- (2) Avoid unnecessary handling of the casualty.
- (3) Protect the casualty from falling rock by placing his helmet over his head.
- (4) When the route of evacuation is long and arduous, a series of relay posts or warming stations should be established. These stations must be staffed with the minimum medical service personnel to permit proper emergency treatment of shock, hemorrhage or other emergency condition.
- (5) When a casualty develops new or increased signs of shock while being evacuated he should be left at one of these stations until such time as his condition warrants further evacuation.
- (6) Ambulatory casualties may move rapidly on skis. Skis are readily available as splints for suspected or actual fractures. Also several skis locked together may be utilized as a field expedient in lieu of a 200-pound sled. Then skis covered by several field jackets make an adequate litter.
- (7) When the situation warrants and the terrain is such that oversnow vehicles can be utilized, the M-59 heated personnel carrier is an efficient means of evacuating casualties.

128. Special Training

a. Prior to training in basic mountain evacuation, litter teams should receive instruction in assault climbing.

b. Litter bearers and aid men must be thoroughly familiar with the use and care of rope as an item of equipment.

c. The members of litter teams must become thoroughly proficient in the technique of belaying, and in the choice of belay points. When evacuating a casualty over extremely difficult terrain, this knowledge will often be required to give proper support and protection to casualties and litter bearers.

129. Preparation for Evacuation

(fig. 12)

a. To prepare a litter for use in extremely rough terrain—

- (1) Place a stick, 16 inches long and at least 1 inch in diameter along each hinge brace and fasten it securely to each stirrup with wire or strong cord. Lash the stick to the brace along the length of the stick to prevent the hinge joint from collapsing.
- (2) Pass 8 to 10 feet of the end of a climbing rope through one litter stirrup, bringing it around and through again, forming a round turn.

- (3) Secure a 1-inch by 16-inch stick in place against the litter brace by two half hitches, one on each side of the hinge joint.
 - (4) A round turn is then made on the opposite stirrup.
 - (5) Tie the end to the long part of the climbing rope with a bowline knot between the canvas of the litter and the upper ends of the handles.
- b. The end thus prepared becomes the head of the litter.
- c. (1) A casualty may be lashed to the litter in a variety of ways depending on the route of evacuation, the condition of the casualty, and other similar factors. If the route is short and relatively easy and the casualty is able to protect himself, no fixation will be necessary.
- (2) On the other hand, if the evacuation route must pass over a cliff, down a steep slope, or if the casualty is unconscious, he must be securely lashed to the litter. In securing a casualty to a litter, the pelvic bones lend themselves most favorably to the tie since injuries of the leg, abdomen, chest or arms will not be involved in the procedure. A blanket is folded like a diaper over his abdomen. This eases materially the pressure caused by the sling at the points of contact. Four 12-foot nylon sling ropes are used. Two to lash the upper part of the body and two for the lower part. A team of two men is most efficient, one man working on each side of the litter. The upper part of the body is lashed first. Two sling ropes are used, tied with a bowline on the upper part of the legs in the crotch. One sling rope on one leg and the other on the opposite.
- (3) The ends of the ropes are then brought diagonally across the body, under the arms, to the stirrups on the opposite sides of the litter, passed through the stirrup and a round turn formed, brought across the chest to the opposite stirrup, another round turn formed, the rope brought back across the chest and tied off with a square knot. If the ropes are not long enough to reach across the chest and back again, they will be tied off on the chest after the first round turn on the stirrup. To tie the lower part of the body, sling ropes are tied to each of the upper stirrups with a round turn and two half hitches, brought diagonally across the body to the stirrup on the opposite side of the litter at the foot, and round turns made on each stirrup. The knees of the casualty are bent slightly and the feet drawn back. The ropes are brought from the stirrups and wrapped

around the feet, bringing the rope across the bottom of the feet first, to act as a platform. Tie off with a square knot on the bottom side of the feet so that the knot will not form pressure on the arch of the foot. The knees are then pushed down tightening the ropes.

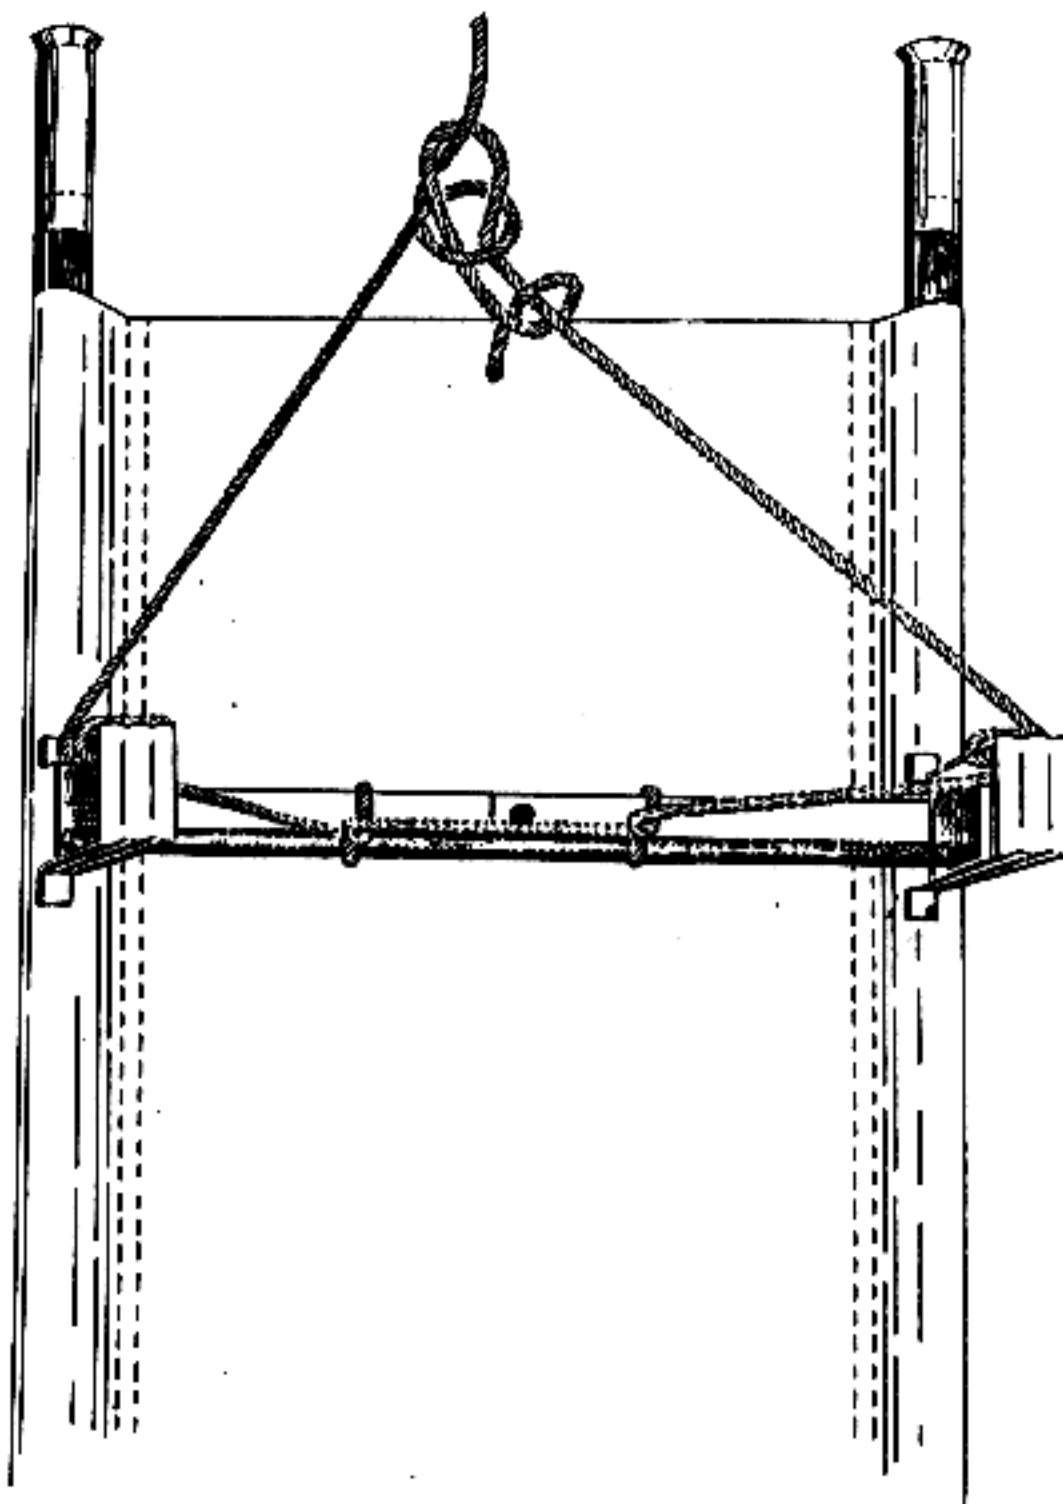


Figure 12. Method of fastening belay rope to litter.

- (4) In the event that the casualty is wrapped in blankets or a sleeping bag, the above method cannot be used. A clove hitch is made with one loop about the small of the patient's back and the other loop about his hips, just below the buttocks. The running end from the upper loop is passed through the upper stirrups and across the casualty's chest and secured. The running end from

the lower loop is passed through the lower stirrups and secured over the casualty's legs in a similar fashion (fig. 13).




Securing body to head of litter

Figure 13. Securing casualty to litter.

130. Ascending and Descending Slopes

a. In ascending a steep slope the litter is prepared and the casualty immobilized as described in paragraph 129 (fig. 14). Two litter bearers take their places at the head of the litter, and a third, using the litter sling, takes his place at the foot. A thin sapling passed through the stirrups and extending 18 inches on either side of the lines affords a more secure grip for the two litter bearers at the head of the litter. The fourth and fifth men take their positions along the extended rope which is in the hands of the sixth, or belay man. At the signal UP ROPE, the fourth, fifth, and sixth men pull while the others lift the litter and slowly climb. The men carrying the litter should not try to do

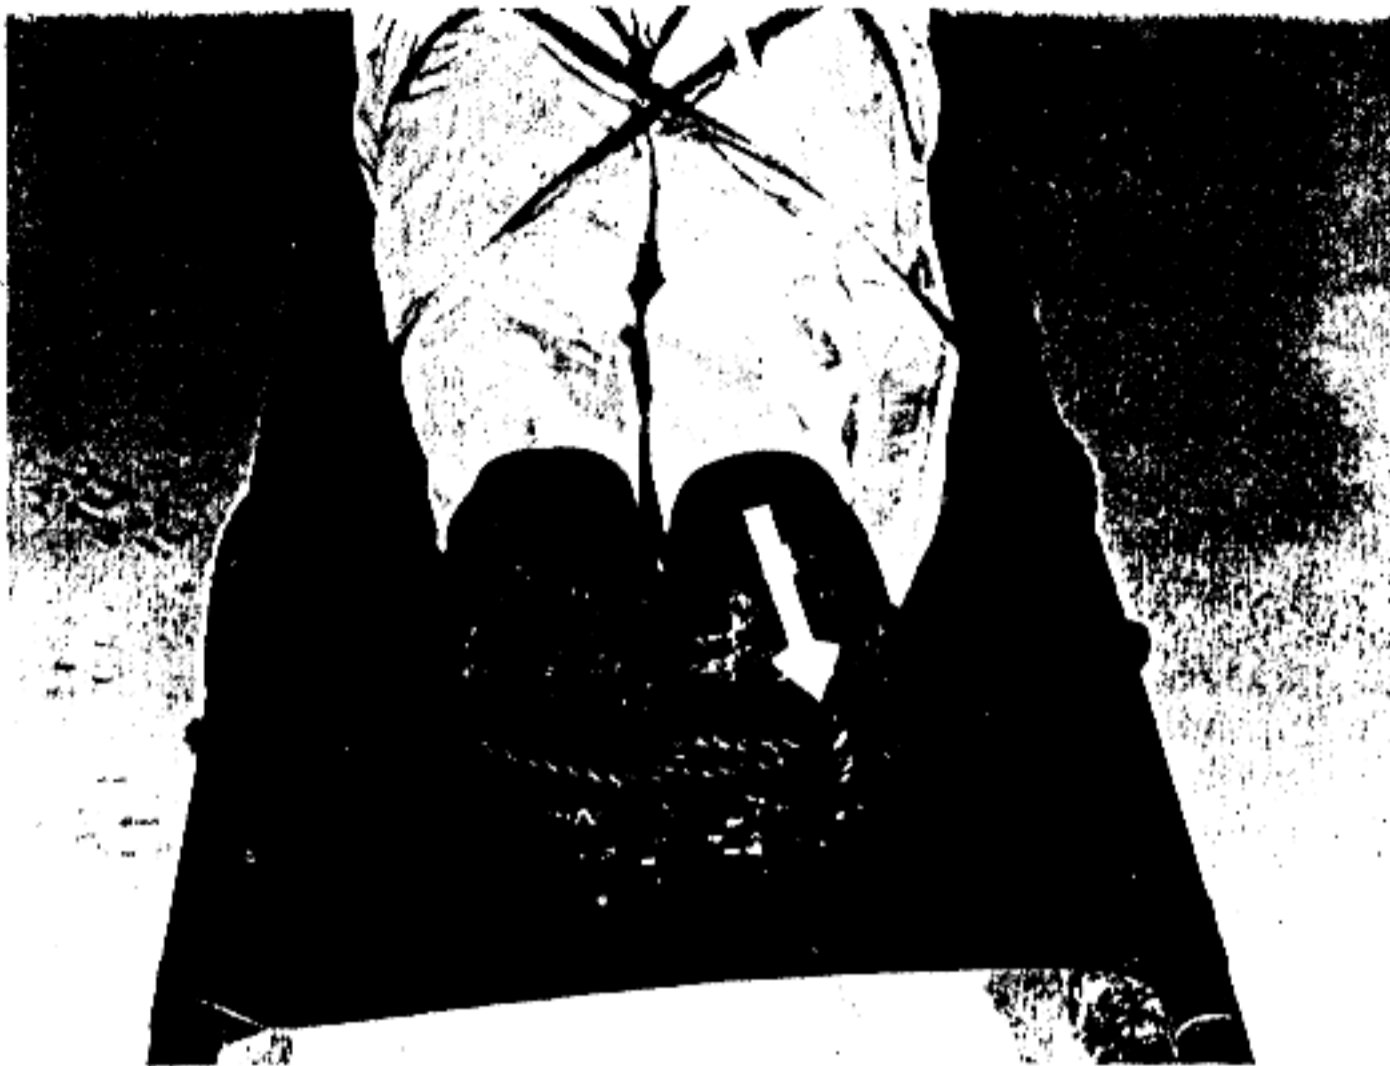

Securing legs to foot of litter
Figure 13—Continued.



Figure 14. Steep slope evacuation—ascending.

all the work, but allow themselves to be pulled up the slope while they hold the litter off the ground. Men exchange positions at each halt so that the work will be distributed equitably. When each belay point is reached, the litter is placed on the ground and a new belay position farther up the slope is taken.

b. In making the descent, the litter and casualty are prepared as described in paragraph 129 (fig. 15). One man acts as belay man and another takes his position on the rope, assisting him in lowering the litter. The three litter bearers take their positions as for the ascent. The sixth man may assist with the litter or precede the team, picking a trail, making the passage more negotiable by clearing away shrubs and vines, and making a reconnaissance so that the team need not retrace its steps if a cliff should be encountered. In making the descent, the most direct practicable passage should be taken. All available trees and rocks should be used as belay positions.



Figure 15. Steep slope evacuation—descending.

c. If the slope is relatively free of underbrush or trees, a three-man team may be used. In this procedure skids are placed under the litter. Two saplings, each 15 to 20 feet long and about 3 inches in diameter at the heavy end, are cut. The small ends are secured to the stirrups and litter brace at the foot of the litter; the butt ends are secured inside and to the stirrups at the head of the litter (1, fig. 16). In this manner, the butt ends of the saplings project about 9 to 14 feet beyond the head of the litter and act as the foot of the litter. The second and third men are belay men, relieving each other as the rope is paid out, by assuming successive belay positions (2, fig. 16). In this way the descent need not be interrupted while the belay position is being changed. Using this method of evacuation, it has been demonstrated that a casualty can be evacuated 200 to 250 vertical feet in about 10 minutes and that vertical faces of rock 4 to 6 feet high can be descended without difficulty.

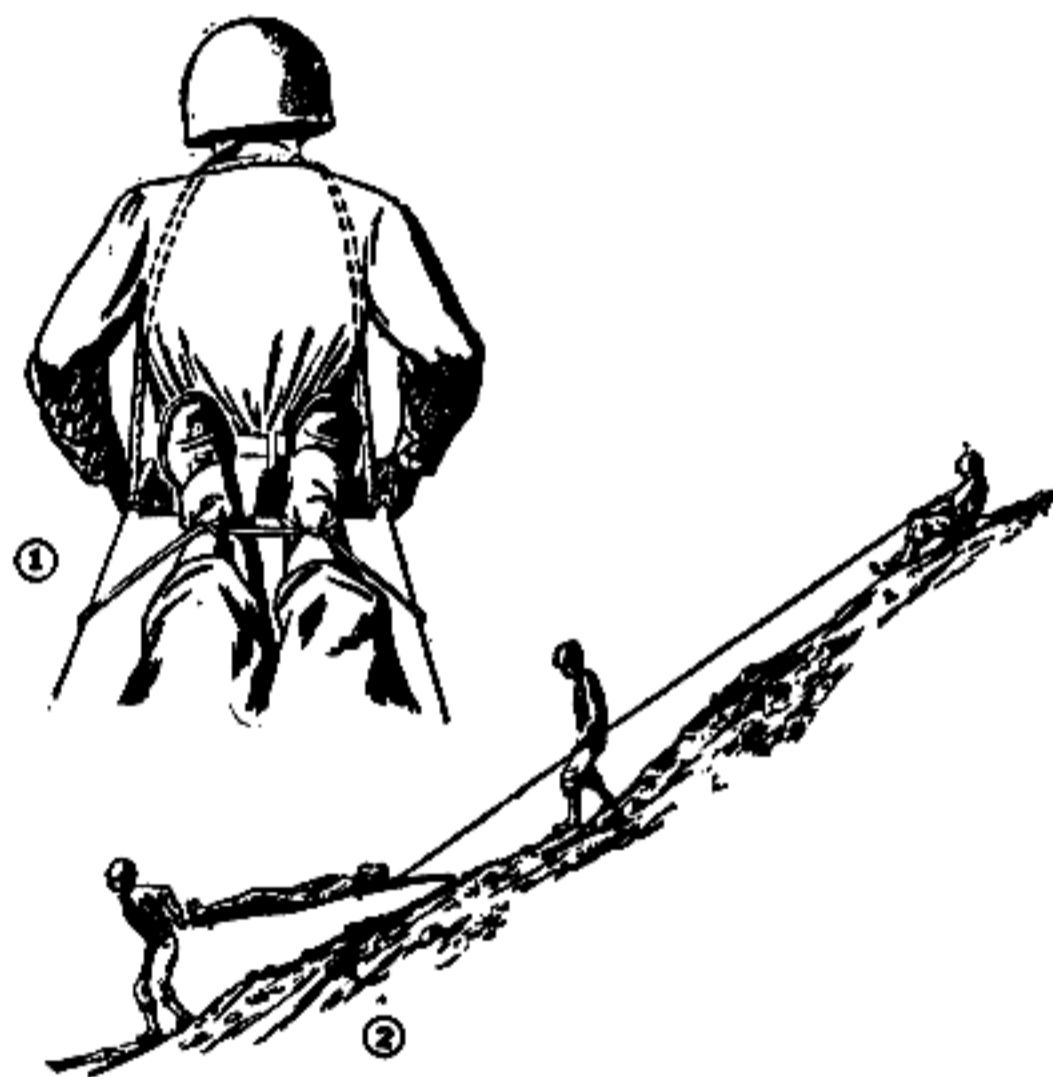


Figure 16. Litter travois.

131. Cliff Evacuation

a. Evacuation via cliffs should be used only when absolutely necessary and only by experienced personnel. The cliffs with the smoothest faces are chosen for the route. In this method, at least five 120-foot ropes are necessary.

b. The preferred method to be used requires only four litter bearers, five 120-foot nylon climbing ropes and four 12-foot nylon sling ropes. The litter is prepared by placing a stick at least 16 inches long and 1 inch in diameter along each hinge brace and fastening it securely to each stirrup with wire or strong cord. Two poles 8 to 10 feet long and about 4 inches in diameter are used as runners. The poles are attached to the stirrups by rope or wire; at the points of fixation, notches are made so that the rope or wire will not be worn unnecessarily by friction. The belay rope is attached and the casualty secured to the litter as described in paragraph 129.

c. Two litter bearers remain at the top of the cliff, one to belay and the other to transmit signals and directions. The remaining two litter bearers, after each secures two rappelling ropes to suitable anchors at the top of the cliff, each grasp one of the handles at the foot of the litter and working with the man on belay, ease the litter over the edge of the cliff. As the man on the belay follows the signals and directions of the litter bearer who remained on the cliff, either playing out rope or holding the litter in position, the two rappellers guide the litter down the face of the cliff (fig. 17). Upon reaching the base of the cliff the two rappellers carry the foot of the litter away from the cliff as the man on belay gently lowers the head of the litter until it too is on the ground. This method can be worked very smoothly by a trained team with no added danger to the casualty or the bearers.

d. An alternate method which may be used is: The casualty is secured to the litter in the usual manner. Two poles, 8 feet long, are cut from trees with a diameter of 4 to 6 inches, and used as runners. Both ends of the poles are beveled. The poles are attached to the stirrups by rope or wire; at the points of fixation, notches are made so that the rope or wire will not be worn unnecessarily by friction. A rope is attached to each stirrup at the foot of the litter for use as guy ropes in order to prevent the litter from spinning during the descent. The litter is lowered over the cliff by two men, while a third man belays it. Meanwhile a fourth man escorts the litter on the descent by rappelling down a rope which parallels the route of evacuation, and assists the litter over projecting obstacles. The guy ropes are held taut by the fifth and sixth men who take widely separated positions at the bottom of the cliff. They can also help to ease the litter over protruding rocks by stepping away from the cliff and adding tension to the guy rope. As the litter approaches the bottom of the cliff, the guy rope operators approach the

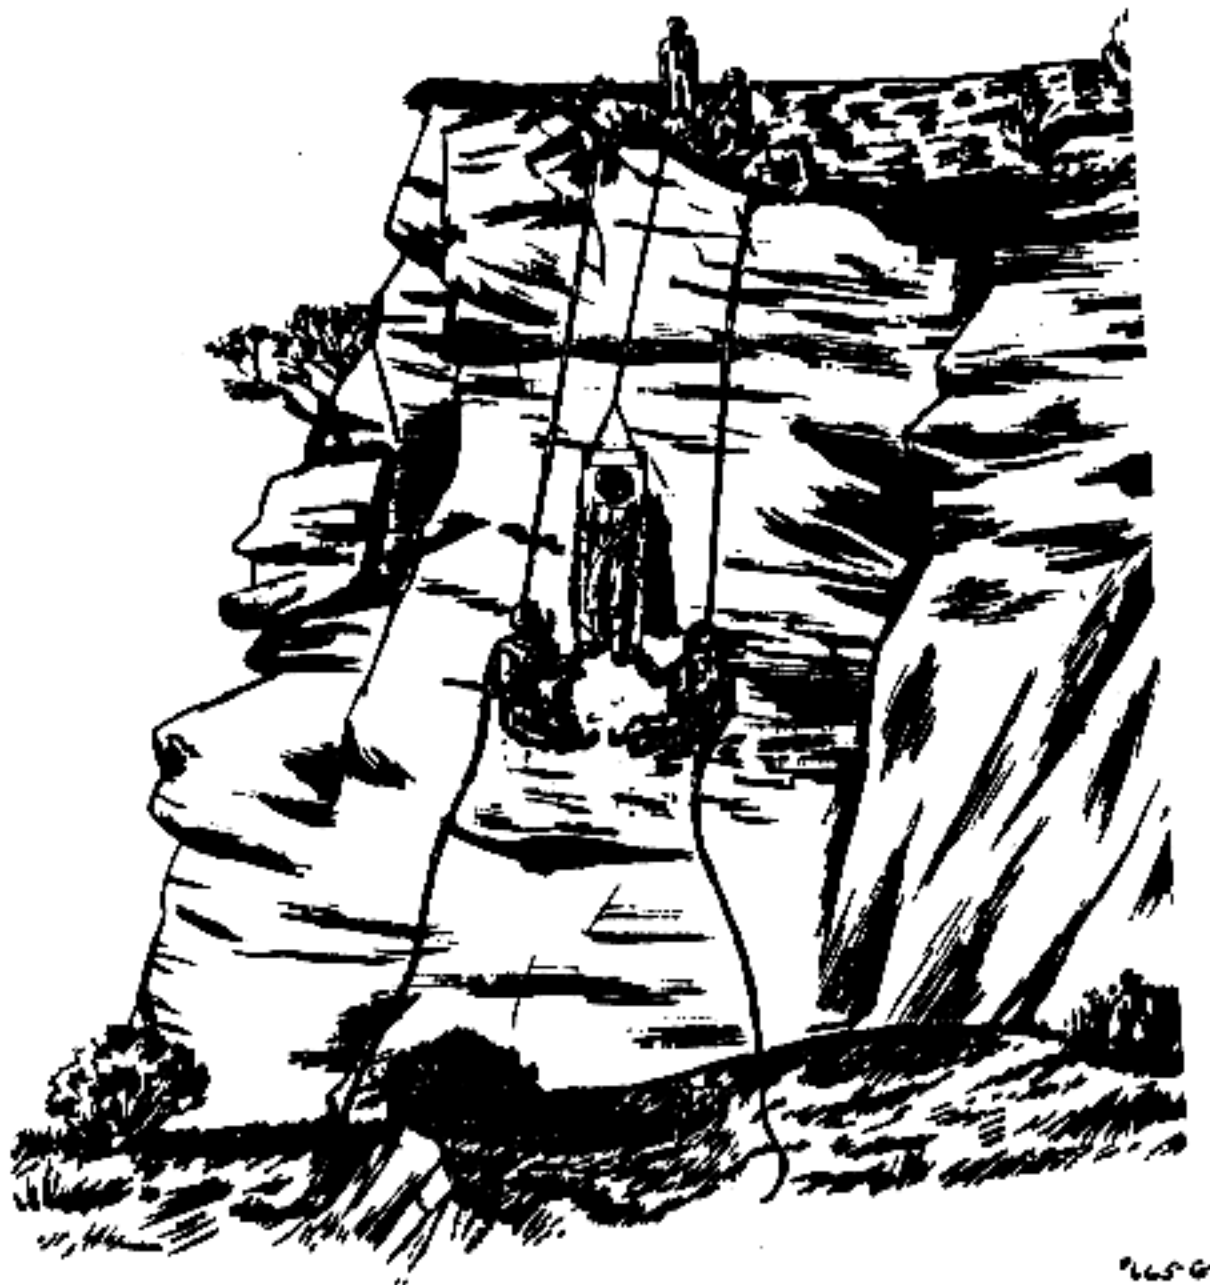


Figure 17. Cliff evacuation—descent.

litter, meanwhile maintaining tension of the ropes, and when close enough grasp the litter handles and lower it to the ground.

e. The same procedure can be used in evacuating a casualty up a cliff except for the following variations:

- (1) An additional man will be needed at the top of the cliff to help raise the litter up and over the edge.
- (2) The guy ropes must be attached to the stirrups at the head of the litter, instead of the foot.
- (3) In the case of an overhanging cliff, a shears (A-frame) must be constructed at the top. See FM 5-10 and TM 5-220.

132. Carriers

a. Casualties who are not seriously injured but cannot negotiate a descent by themselves may be carried down by a carrier who is belayed from above. The carrier, in making his descent, leans away from the slope as much as possible and walks sideways allowing the belay man to support him. Facing the slope

and descending backwards should be avoided since it leads to unnecessary falls. By keeping his lower leg well braced, keeping the weight of the casualty high on his back, and by grasping trees and rocks, he can descend very steep slopes with relative ease.

b. To secure the casualty to a carrier with a rope, the carrier rests on his hands and knees while the casualty straddles his back (fig. 18). A 12-foot length of $\frac{7}{16}$ -inch nylon sling rope is used. The center of the rope is placed under the casualty's buttocks. The right loose end is passed under the carrier's right armpit, across his chest, over his left shoulder, and under the casualty's left arm; the left loose end is passed under the carrier's left armpit, across his chest, and over his right shoulder, and under the casualty's arm, and the tie is made across the casualty's back. If the carrier suffers from the pressure of the rope against his chest, the rope may be crossed behind his neck instead of over his chest, before securing the ends around the casualty. The carrier's shoulders should be padded to prevent cutting by the rope.



Figure 18. One-man carry using rope sling.

c. An alternative method is to use two pistol belts hooked together and draped over the carrier's shoulders. The casualty straddles the carrier and the belay man secures the loose ends of the pistol belts under the casualty's buttocks. Slackness in the

pistol belt sling should be avoided, since the carrier is most comfortable when the casualty rests high on his back. See FM 8-35.

133. Pole Carry

The pole-carry method should only be considered as a last resort, since it is very difficult for the litter bearers to handle, and very uncomfortable for the patient. Its use is advisable only when narrow ledges must be traversed. The casualty is wrapped in two blankets and suspended from a 14-foot pole by a rope, pistol belts, or web belts. In suspending the casualty, all excess slack should be avoided, since it increases the sidesway during carry. A two-man team, one on each end of the pole, carries the casualty. If the pole is long enough, a four-man team may be used.

134. Evacuation From Trees

It is best to use two men for the evacuation of wounded from trees, although one can accomplish the task by himself if

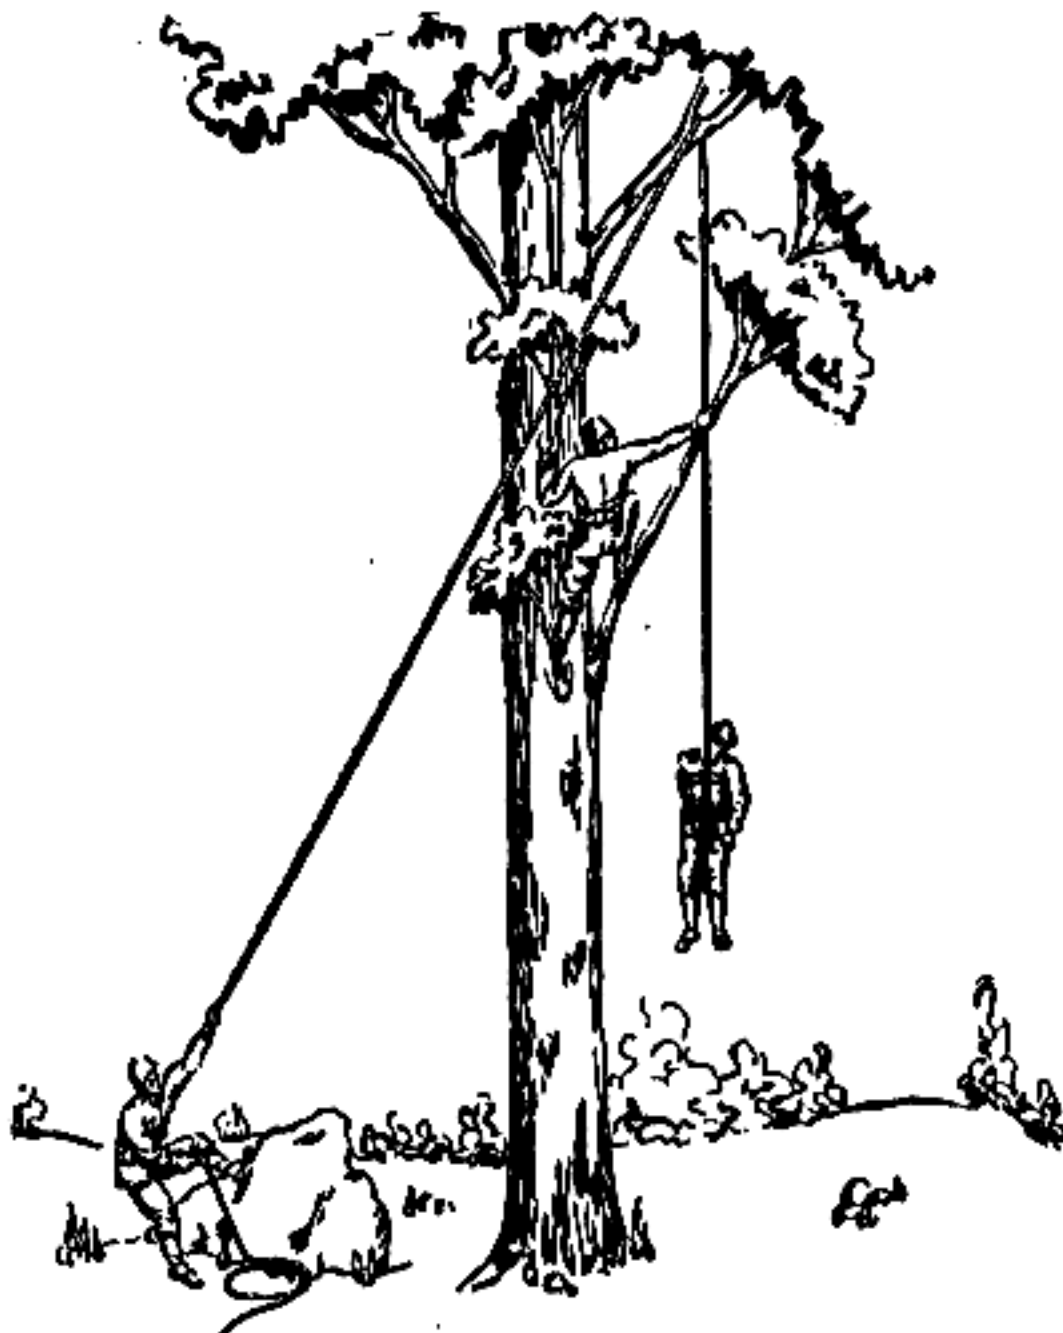


Figure 19. Tree evacuation—method of securing casualty with rope.

necessary. Casualties in trees are usually either tied in place and cannot help themselves, or else have fallen and become wedged in such a way that they are helpless. One man climbs the tree, taking one end of the rope with him. He passes the rope over a branch in the tree above the position of the casualty and then ties a bowline on a bight. He slips one loop over each thigh of the casualty and then with the same rope ties a bowline around the casualty's chest. A man on the ground belays the casualty and lowers him from the tree. The first man escorts the casualty in his descent and prevents his movement from being impeded by intervening limbs or branches.

135. Horizontal Hauling Line

(fig. 20)

a. The horizontal hauling line is one of the most complex of the various methods of evacuation discussed so far. It is primarily used in those cases where a steep slope or cliff has to be passed and where, at the same time, there is an intervening obstacle such as a swiftly running mountain stream. It can also be used to span a chasm when bridges are demolished. This method should be instituted only where there will be a considerable number of casualties, such as at a warming station

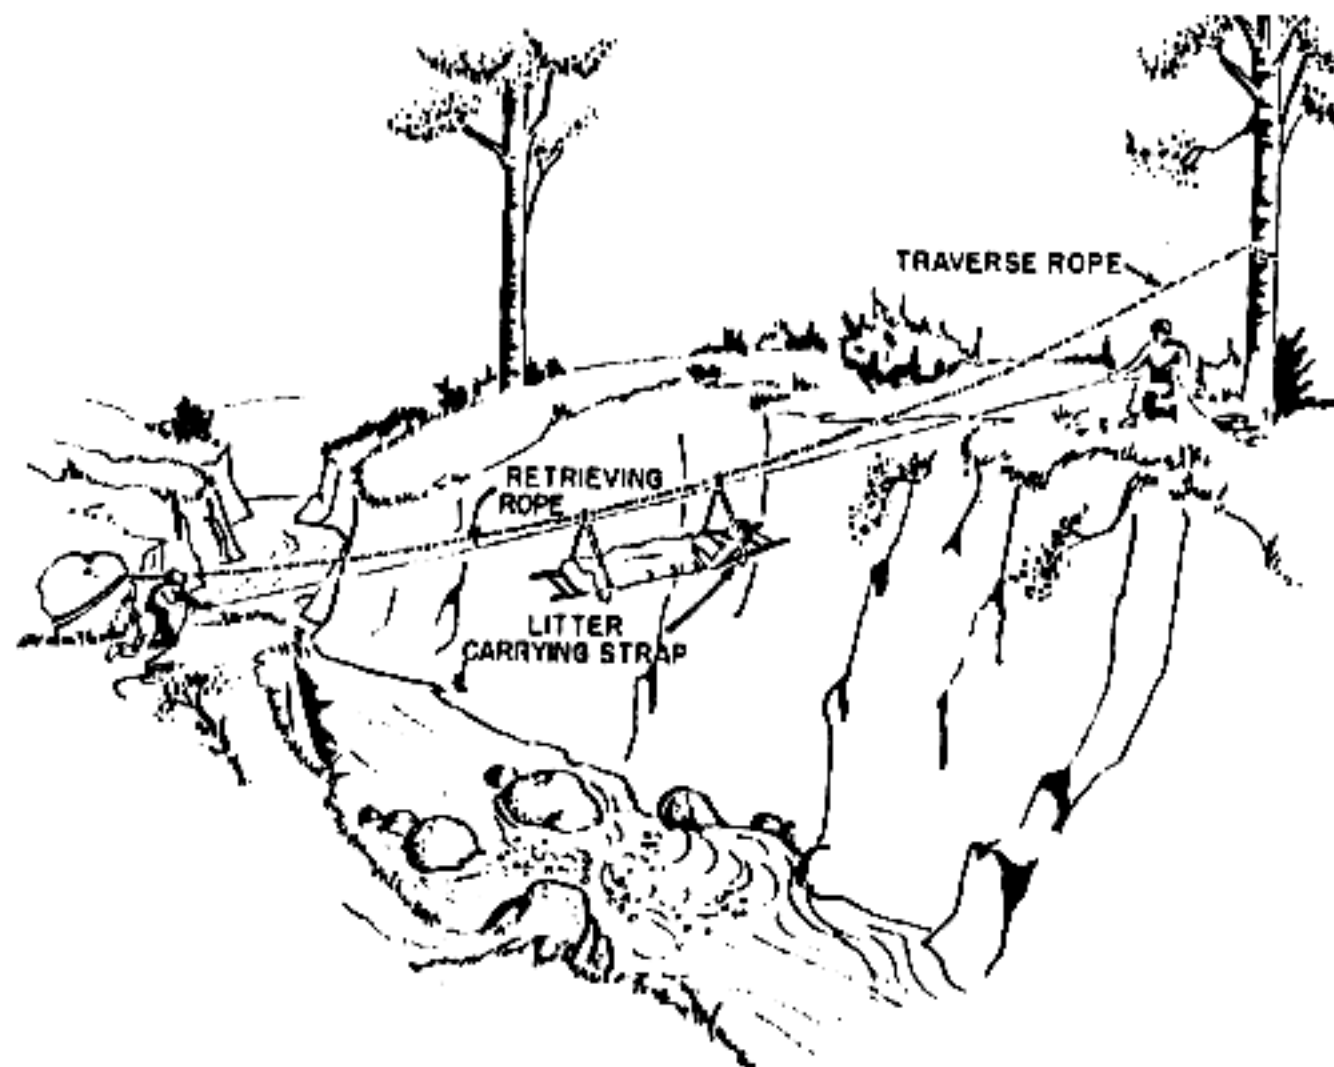


Figure 20. Evacuation by horizontal hauling line.

or collection point, and should not be installed for the evacuation of only one or two. It can be used to lower or raise casualties over the obstacles. The hauling line is installed as follows:

- (1) By means of a bowline, a 1-inch manila rope is secured to a tree far enough from the edge of the cliff (6 to 10 ft) to permit freedom of movement by the medical personnel. On the opposite side, the other end of the rope is passed around another fixed point (tree, boulder, or possibly a vehicle) and, by means of a transport knot, is pulled as taut as is necessary. All traverse rope should have a certain amount of slack. When manila or sisal rope is used, a 5 percent sag should be allowed to avoid undue fatigue from developing in the rope.
- (2) (a) To suspend the litter, two snaplinks are placed upon the traverse rope and one long litter carrying strap attached to each. A lower and upper retrieving rope is attached either to the litter stirrup or to the respective snaplinks. In the latter case the loose ends of each rope are tied together above the center of the litter so that, when drawn up or down, both snaplinks move simultaneously.
(b) If snaplinks are not available, two empty adhesive tape spools, 1-inch wide, may be utilized and the long litter carrying straps affixed to them. If these are used they should be placed on the traverse rope before the rope is fixed at both ends.
- (3) After the casualty has been secured to the litter, the litter is raised and the litter carrying straps or suspension ropes are passed through the stirrups and fastened together or else secured to the opposite stirrup.

b. The operation of the hauling line is as follows:

- (1) *Ascent.* Three men can easily raise the litter along the traverse by pulling on the upper retrieving rope. The pull should be steady and smooth in order to prevent jolting and sway.
- (2) *Descent.* A gentle pull on the lower retrieving rope is enough to break the inertia and let gravity do the rest. During the descent, the men on the upper side should control the speed of the descent through their retrieving rope. It may be necessary to pull the casualty the last few feet when the litter nears the low point of the slack in the traverse rope.

136. Evacuation Across Streams

Mountain streams or rivers are relatively shallow, but possess strong rushing currents. In addition, the beds are often strewn with boulders covered by silt and mossy growths which afford very treacherous footing. To cross mountain streams safely, the element of support to the individual is of great importance. To attain this, two ropes are tied to trees on one bank and then pulled as taut as possible around trees on the opposite bank; the interval between ropes should be about $1\frac{1}{2}$ feet. The four litter bearers take their usual positions at each handle of the litter and then, by placing themselves between the ropes, place their free arms over their respective ropes and lean on them. These ropes will afford sufficient support for the team to cross the stream without mishap. In the case of a two-man team, the litter bearers take their positions between the ropes, place their arms over the ropes so that the support is the armpit of each man, and then raise the litter. A two-man team should use litter slings. When a very swift current is encountered, a rope may be attached to the litter and two additional men lend support by pulling the litter across while it is supported by the four litter bearers.

137. Expedients for Evacuation in Snow

(fig. 21)

Although litter bearers mounted on snowshoes will usually evacuate casualties on snowcovered mountains, downhill evacuation can be speeded up considerably when litter bearers are



Figure 21. Evacuation using 200-pound sled.

equipped with skis and a 200 pound capacity boat-type sled. For details of evacuation in snow, see FM 31-70. A serviceable emergency litter may be improvised in a few minutes by lashing two packboards to a pole frame. A casualty can be securely fastened to the litter by using the packboard straps. Any number of ways may be devised to use available materials in making a very satisfactory litter.

138. Establishment of Litter Bearer Posts

a. It would be wise in many situations, if sufficient litter bearers are available, to establish a chain of litter posts from the forward aid stations back to a point where evacuation can be taken over by ambulances.

b. Each litter post should have one non-commissioned officer and four litter bearers. However, when short of personnel, one noncommissioned officer could be used to supervise more than one litter post. Each post is responsible for the evacuation of all casualties received, including the next litter post to the rear. When returning to their post, bearers bring back empty litters and other medical supplies which are required at forward aid stations. This will permit maximum use of available bearers because a given number of bearers operating in a chain of posts can evacuate far more wounded than can be accomplished if each litter team attempts to evacuate the wounded from the front line aid stations to the rear, where ambulances can pick them up.

c. This system was frequently used in mountain fighting by both United States and British troops. It allows bearers to function continuously since each haul is relatively short, and the men become rested on their way back to their post. They also become familiar with the short section of mountain trail over which they travel. This makes it possible for them to operate over the trail at night, and gives the wounded a much smoother ride.

d. This system is also of value because it does away with the straggling frequently encountered when the same litter bearers are used from the front lines all the way back to the ambulance loading point.

Section VII. TRANSPORTATION

139. General

a. Reconnaissance of the available road net will determine the type and the maximum number of vehicles that can profitably be employed in any particular mountain operation. Most of the heavy type motor vehicles are roadbound and limited to improved

roads. Mountain roads or trails usually are unimproved. Bridges are often narrow and of a flimsy construction and require reinforcement before they are adequate for military traffic. Few roads are built on ridges where troops will operate.

b. Motor transportation in mountainous terrain is usually drastically reduced. Only those vehicles carrying loads which cannot be packed should be allowed beyond a previously designated truckhead. The list of trucks to be left behind, which may average two-thirds of the total, should be part of the standing operating procedure of each unit. When the mountains have been crossed and the road net branches out, the trucks left behind can be brought forward under convoy.

c. Full advantage must be taken of the limited motor transportation to move ammunition and rations as far forward as possible in order to reduce the high percentage of combat personnel required for packing and hand carry.

d. Motorized and air reconnaissance may be advantageously employed in the large valleys.

140. Specific Problems

a. *Traffic Control.* Traffic control must be rigidly maintained to prevent traffic congestion and delay. The responsibility for establishing and maintaining traffic control must be delegated to one person within the battle group and to the transportation officer in division or higher headquarters. Telephones or radios should be installed to provide traffic control on long stretches of one-way road. Traffic jams can be largely avoided if the following precautions are taken: constructing turnouts for single lane roads; establishing a block system for one-way roads; granting of priorities to only the minimum essential vehicles; preventing turnarounds except on places especially prepared and designated for that purpose; requiring troops to march off the roads. When vehicles must pass each other on a narrow road, the one on the safer side should move forward only after that on the more dangerous side has pulled over as far as possible and has come to a full stop.

b. *Maintenance.* Maintenance of motor transportation assumes unusual importance in mountain operations. Prior to and during operations in steep terrain, the safety devices of all vehicles must be checked continually, since failure on the part of any may have disastrous results. Proper adjustment of brakes is especially important. The emergency brake must be adjusted so that it is capable of holding the vehicle on any slope without the aid of gears or foot brakes. One failure which is extremely dangerous when vehicles are descending steep slopes and depend-

ing on the braking power of the engine is the slipping out of gear of the transmission. Winches should be checked for proper lubrication and proper adjustment of the automatic brake. Engine coolant must be checked closely because of probable overheating of the engine when operating over steep terrain. For information on special care of equipment in extreme cold, see FM 31-70.

c. Movement on Steep Grades.

- (1) Steep grades are constantly encountered in mountainous terrain. All grades should be negotiated, as far as possible, by driving; winching should be considered only as a last resort. Chains are frequently necessary due to the presence of ice or mud on the road surface.
- (2) Short, steep pitches may be climbed by building up momentum in the approach. Generally, however, steep grades should be approached with a slow, steady pull; when this procedure is followed, the vehicle will normally go higher before traction fails and winching must be resorted to. When winching is necessary, the route selected should provide frequent anchor points in the form of trees or rocks. The more frequently anchor points are used, the greater the mechanical advantage that can be obtained by the use of snatch blocks. When trees or rocks are not available, the ground-anchor can be used. At each point where winching is necessary, the use of one prime mover to winch other vehicles or howitzers in turn as they arrive at that position is recommended. When howitzers are being winched up or down, the trails of the weapons should be downhill. When winching on steep slopes, less strain is placed on the winch if the gear of the vehicle being winched is placed in neutral, and the winch allowed to pull steadily. The power on the winch must not be engaged too suddenly, as this places undue strain on the cable. Care must be taken at all times to clear obstruction from the route in front of the wheels.
- (3) Further information on movement of prime movers and howitzers on steep grades is contained in paragraphs 91 through 102.

d. Daylight Driving.

- (1) In daytime driving on mountain roads, all vehicles should normally remain in open column because of their vulnerability to air attack. Extreme care must be exercised on all roads because of the many sharp, blind

curves and steep grades. All curves must be taken at a speed which will enable the driver to halt the vehicle in half the visible road space. Either up or downhill grades should be taken in a gear ratio that will enable the vehicle to take the entire hill without shifting. Caution must be exercised to see that the speed of the vehicle does not exceed two-thirds of the speed (listed on the chart in the cab of the vehicle) for that particular gear ratio. Hills should be descended with a combination of braking and engine. Normally the same gear should be used in descending a grade that would be used in ascending the grade. Neither should be used alone to bring a vehicle downhill.

- (2) Guides should be posted at dangerous places, especially when backing and turning are required, to give directions to each driver just before he starts to negotiate the difficult section.

e. Driving at Night. Because the danger of blackout driving in mountains will often exceed the danger of enemy action, driving without lights on narrow winding mountainous roads should be held to a minimum. When blackout driving is necessary because of enemy observation it should be limited to those stretches of road visible to the enemy. At these points signs and guides should be posted to give special instructions to each driver as he approaches. Trucks should be in close column. Only when the driver can definitely see the road or the tail light of the vehicle in front is it safe to drive without an assistant driver preceding on foot. Lead vehicles should not exceed 5 miles per hour.

CHAPTER 4

MILITARY MOUNTAINEERING

Section I. GENERAL

141. Importance

Military mountaineering provides a means for operating on rugged mountainous terrain. In such terrain there are three adversaries—the enemy, the mountains and weather. These adversaries can be overcome by using troops with specialized training who are skilled in the use of special mountain climbing equipment.

142. How it is Used

Soldiers skilled in military mountaineering can perform many essential missions in difficult terrain. They can serve as guides, observers, snipers and as patrols, security elements and assault team members.

143. Effect on Deployment

An estimate of friendly or enemy capabilities in rugged terrain is possible only if the higher commanders are thoroughly familiar with the capabilities of the mountaineer. All officers who are to operate in mountainous terrain must be oriented in this respect. As many officers as possible, at least one per company or battery, should become skilled military mountaineers.

144. Training Requirements

a. Specialists. Troops preparing for operations in mountainous terrain should have climbing specialists in each company or battery and platoon. They will usually function as teams of three, occasionally of two men. The men must have reasonable athletic ability, normal resourcefulness, mental toughness a little higher than normal, and no fear of height. Prospective climbing experts should be selected with care.

b. Semitrained Climbers. Preparation for mountain operations is not complete until the unit commander knows how all his men will react to exposure to height and to the out-of-the-ordinary muscular effort. A few hours of climbing for all men provides a valuable index to each man's future reactions. Each man is exposed

to unknown, and therefore frightening, dangers. Fear of falling is a basic instinct, and may be as hard to overcome as fear of enemy fire. Analysis of the man's reaction to height will enable the commander to place those who do not overcome the fear of falling in a position where they will not jeopardize the safety of the unit.

Section II. BASIC TECHNIQUE

145. Mountain Walking

Mountain walking can be divided into four different techniques, dependent on the general formation of the ground to be overcome. Included in all these techniques are certain fundamentals which must be mastered in order to obtain a minimum expenditure of energy and loss of time. These are: that the weight of the body must be kept directly over the feet, and the sole of the shoe must be placed flat on the ground. This is most easily accomplished by taking small steps at a slow steady pace. If the flex of the ankle is stiff and the gradient is too steep to allow the heel to drop, look for any little stone or excrescence, however small, to set it upon.

a. Walking on Hard Ground. Hard ground is generally considered to be firmly packed dirt which will not give away under the weight of a man's step. When ascending, the above mentioned fundamentals should be applied with the following additions. The knees must be locked on every step in order to rest the muscles of the legs. Steep slopes must be traversed and if necessary climbed in a zig-zag direction rather than straight up. Turning at the end of each traverse should be done by stepping off in the new direction with the uphill foot. This prevents crossing of the feet and possible loss of balance. In traversing, the full sole principle is most easily accomplished by rolling the ankle away from the hill on each step. For narrow stretches the herringbone step may be used; that is, ascending straight up a slope with the toes pointed out and using all the other principles mentioned so far. Descending is most easily done by coming straight down a slope without traversing. The back must be kept straight and the knees bent in such a manner that they take up the shock of each step. Again it must be remembered that the weight has to be directly over the feet, and that the full sole must be placed on the ground at every step. Walking with a slight forward lean and with feet in a normal position will make the descent easier.

b. Grassy Slopes. In mountainous terrain grassy slopes will usually be made up of small hummocks of growth rather than one continuous field. Therefore, in ascending, it will be found that

while all the techniques previously mentioned are applicable it is better to step on the upper side of each hummock where the ground is more level than on the lower side. Descending is best accomplished by traversing; at times a hop-skip may also be used to advantage. The hop-skip is a hopping motion in which the lower foot takes all the weight and the upper foot is used for balance only. The hop-skip is also useful on hard ground and scree when descending.

c. Scree Slopes. Scree slopes consist of small rocks and gravel which have collected below rock ridges and cliffs. The size of the scree varies from sand to pieces about the size of a man's fist. Occasionally it occurs in mixtures of all sizes but normally scree slopes will be made up of the same size particles. Ascending scree is difficult, most tiring and should be avoided whenever possible. All principles of ascending hard ground apply, but each step

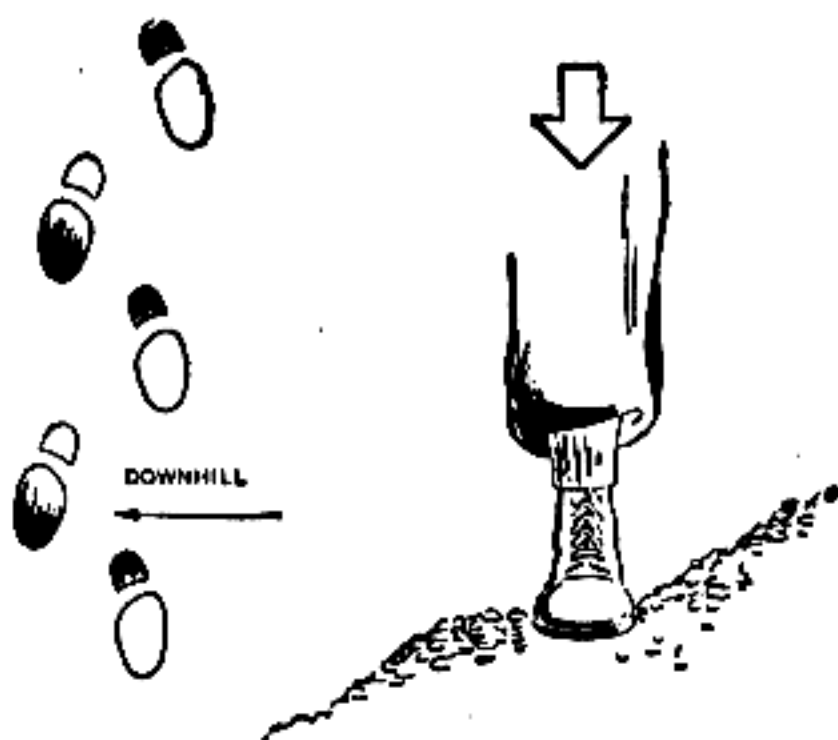


Figure 22. Correct placing of foot in scree slope.

must be packed carefully so that the foot will not slide down when weight is placed on it. This is best accomplished by kicking in with the toe of the upper foot and the heel of the lower foot. Coming down a straight line again is the best way to descend scree (fig. 22). Here it is important to keep the feet pointed straight down as well as keeping the back straight and the knees bent. Since there is a tendency to run down scree, care must be taken that this is avoided and control not lost. By leaning forward, greater control can be obtained. When a scree slope must be traversed and no gain or loss of altitude is desired, the hop-skip should be used.

d. Talus Slopes. Talus slopes are similar in makeup to the scree slopes, except that the rock pieces are larger. The technique of

walking on talus is to step on top of and on the uphill side of the rocks. This prevents them from tilting and rolling downhill. All other fundamentals previously mentioned are applicable.

e. General Precautions. It is of the utmost importance that rocks are not kicked loose. Falling rocks are extremely dangerous to the men below and also make a great deal of noise. If during a climb a rock is kicked loose it is important that the warning word ROCK be given to allow those underneath an opportunity to move out of the path of the rolling rock. Carelessness by one in this respect can cause the failure of a well planned mission, since one rock no bigger than a man's head can kill or severely injure several men as well as ruin all security measures. Stepping over rather than on top of obstacles, such as rocks and fallen logs, will help much toward avoiding fatigue. Usually it will be found that talus is easier to ascent and traverse while scree on the other hand is a more desirable avenue of descent.

146. Rock Climbing

a. Balance Climbing. Balance climbing is the type of movement used to travel on steep slopes. It is a combination of the balanced movement of a tight-rope walker and the unbalanced climbing of a man ascending a tree or ladder.

b. Body Position (fig. 23). The soldier must climb with the body in balance, which means that the weight should be in poise

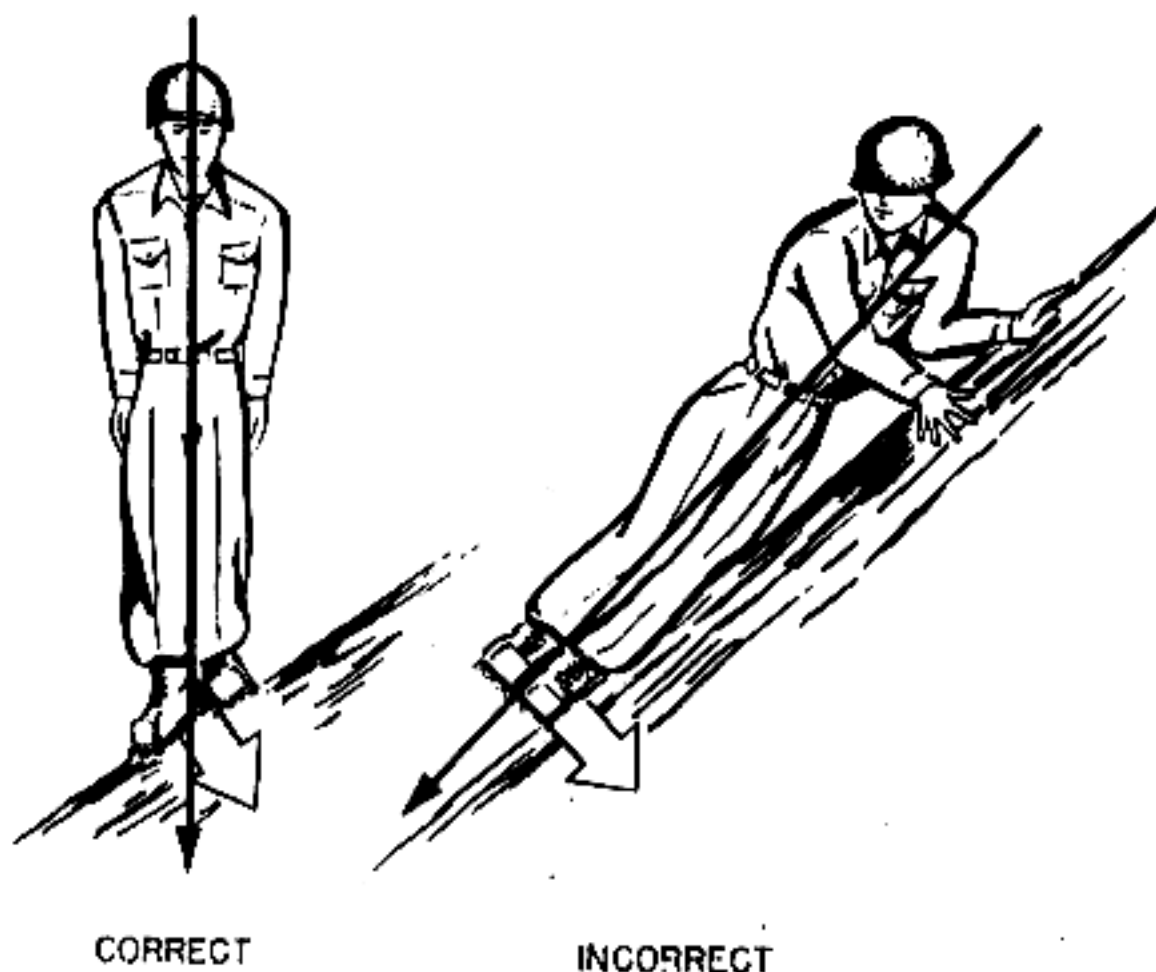


Figure 23. Correct and incorrect body position.

over the feet or just ahead of them as he moves. The feet, not the hands, carry the weight except on the steepest cliffs. The hands are for balance. Feet will not hold well when the climber leans in toward the rock. With the body in balance the climber moves with a slow, rhythmic motion. Three points of support, such as two feet and one hand, for example, are used whenever possible. Hand holds that are waist to shoulder high are preferable. Relaxation is necessary because tense muscles tire quickly; when resting, the arms are kept low where circulation is not impaired. Use of small intermediate holds is preferable to stretching and clinging to widely separated big holds. A spread-eagle position, in which a man stretches so far he cannot let go, should be avoided.

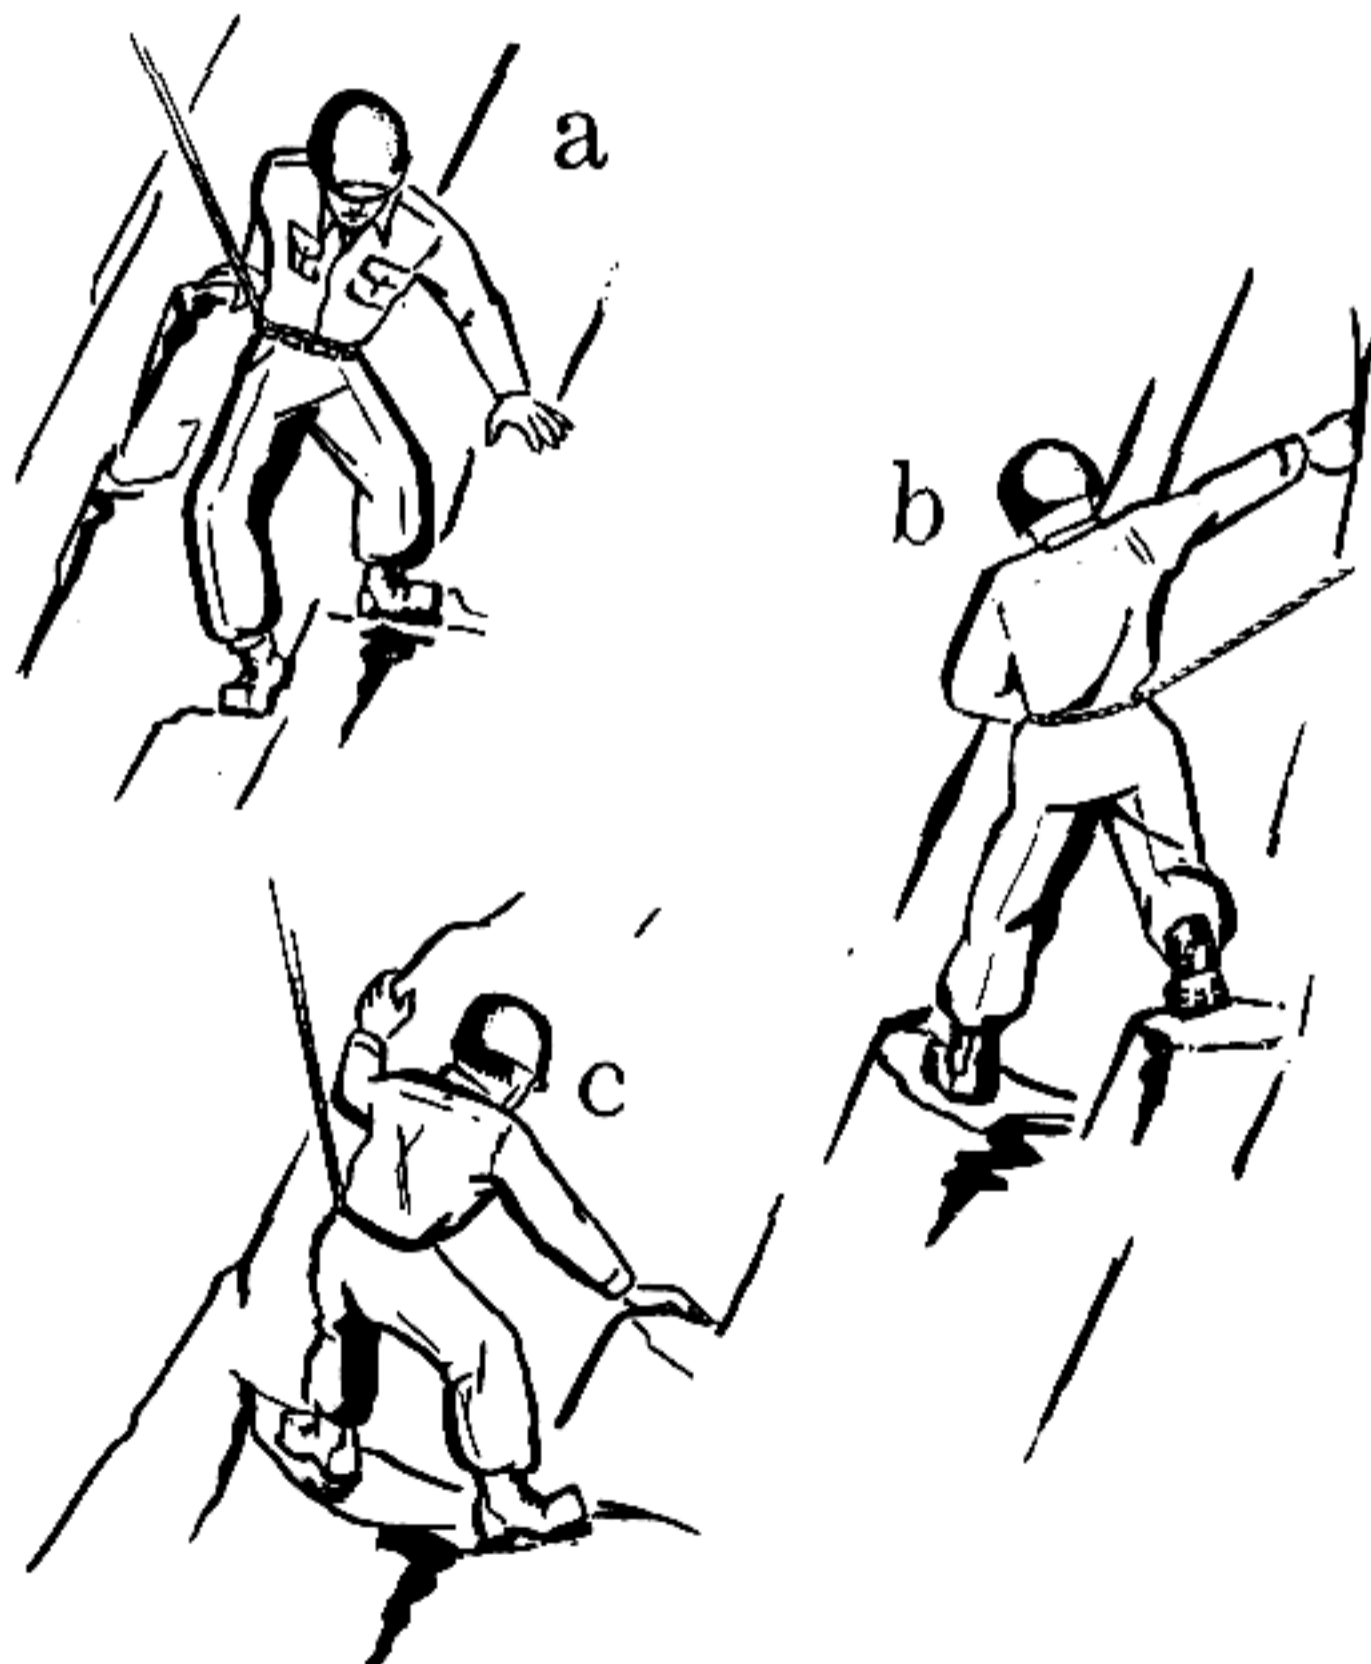


Figure 24. Descent.

In descents, the climber faces out where the going is easy, sidewise where it is hard, and faces in where it is difficult. He uses the lowest possible handholds (fig. 24).

c. Types of Holds.

- (1) *Pull holds* (fig. 25). Pull holds are those that are pulled down upon and are the easiest holds to use. They are also the most likely to break out.
- (2) *Push holds* (fig. 26). Push holds are pushed down upon, help the climber keep his arms desirably low, but are

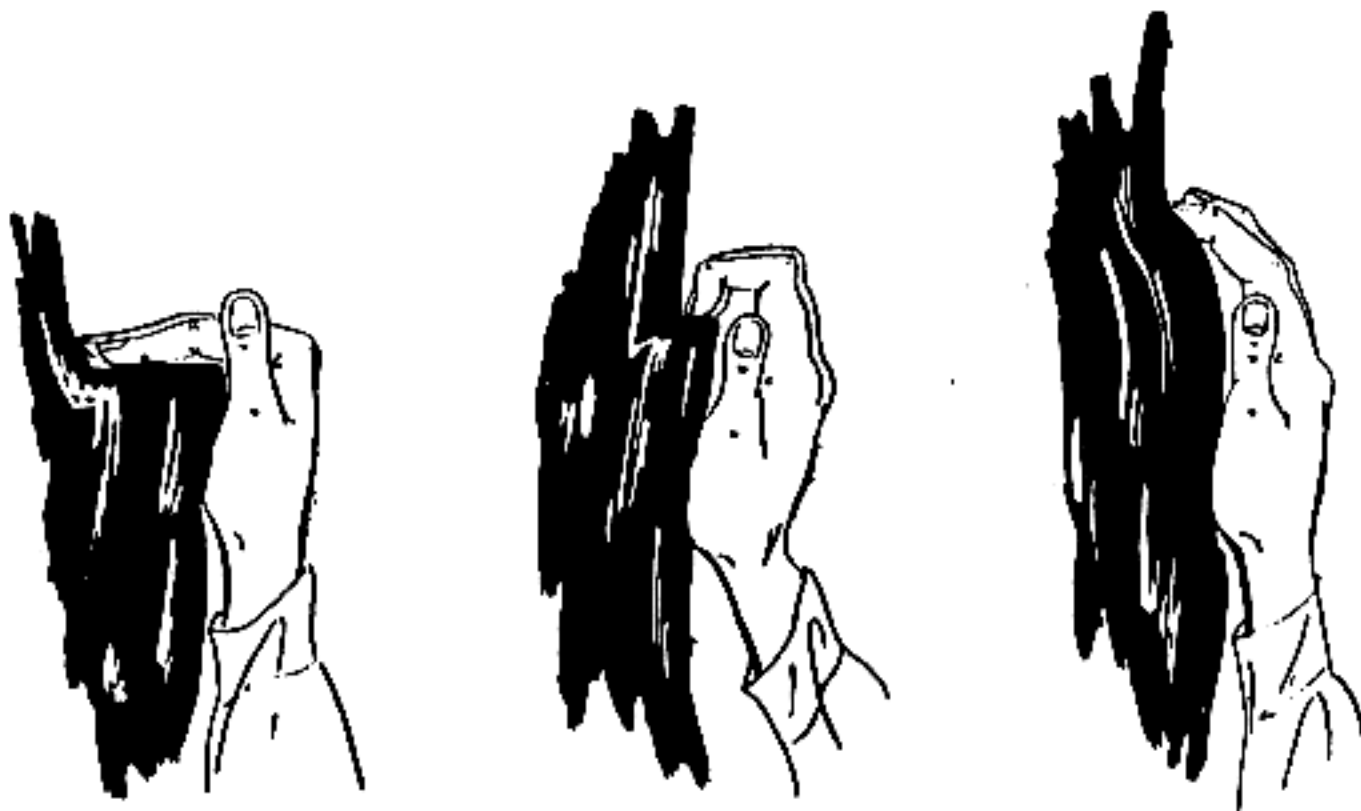


Figure 25. Pull hold.

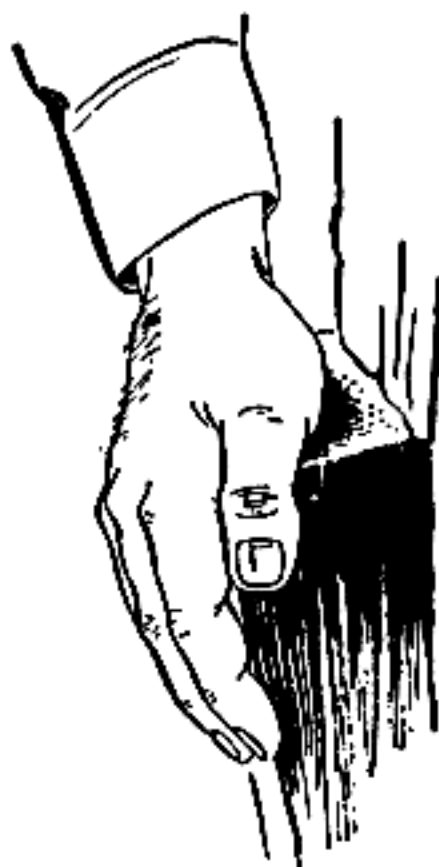


Figure 26. Push hold.

more difficult to hold to in case of a slip. A push hold is often used to advantage in combination with a pull hold.

- (3) *Friction holds* (fig. 27). Friction holds are those dependent solely on the friction of hands or feet against a smooth surface. They are difficult to use because they give a feeling of insecurity which the inexperienced climber tries to correct by leaning close to the rock, thereby increasing his insecurity. They often serve well as intermediate holds, some of which will give needed support while the climber moves over them, but would not hold him were he to stop.



Figure 27. Friction hold.

- (4) *Jam holds* (fig. 28). Jam holds involve jamming any part of the body or extremity into a crack. This can be done by putting the hand into the crack and clenching it into a fist or by putting the arm into the crack and twisting the elbow against one side and the hand against the other side. When using the foot in a jam hold care must be taken to insure that the boot is not jammed into

the crack in such a way that it cannot be removed easily when climbing is continued.



Figure 28. Jam hold.

- (5) *Combination holds.* The holds previously mentioned are considered basic and from these any number of combinations and variations can be used. The number of these variations depends only on the limit of the individual's imagination. Here are a few of the more common ones—

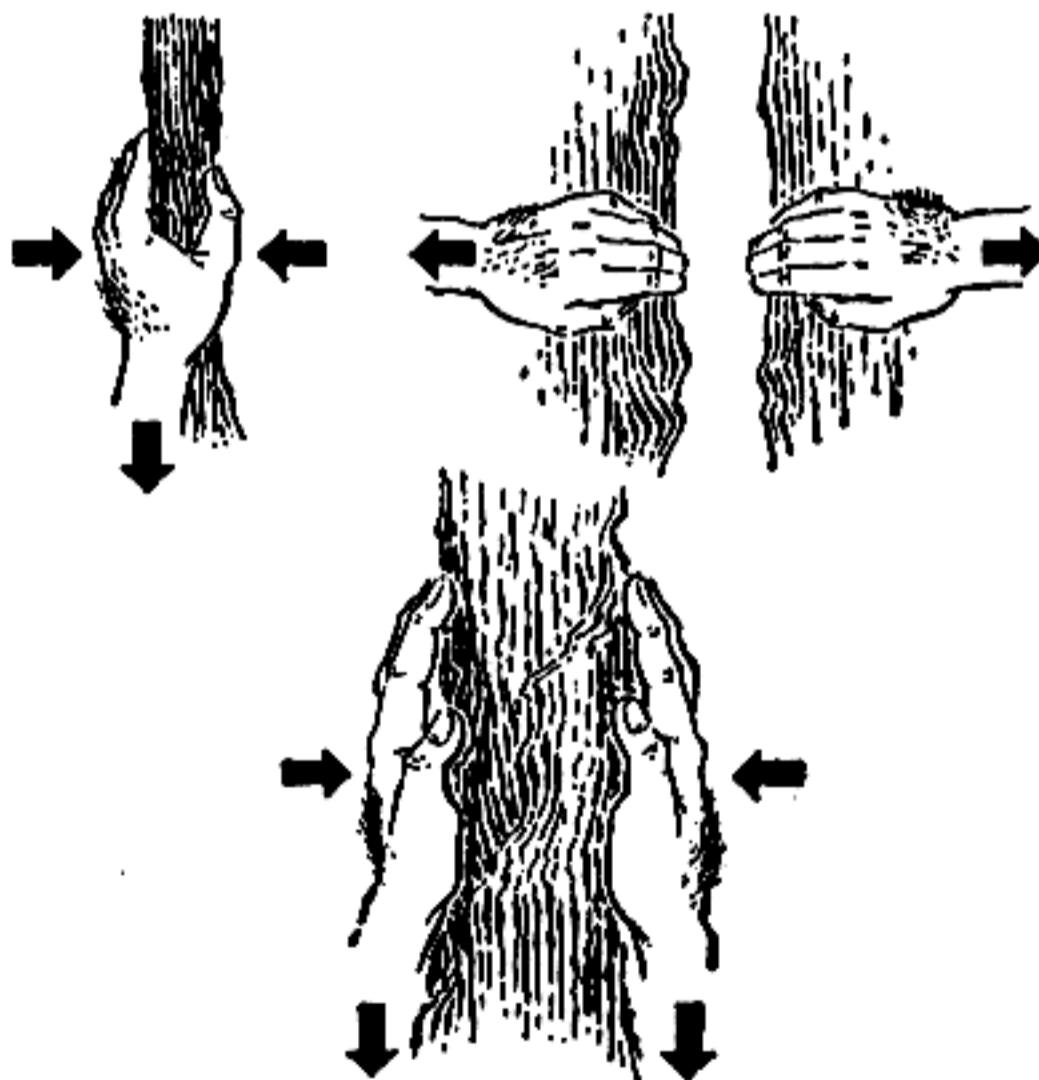


Figure 29. Pinch hold and cross pressure between hands.

- (a) The pinch hold (fig. 29), attained by pinching a protruding part between the fingers.
- (b) Pressing outward or pulling inward with the arms.
- (c) The lie-back (fig. 30) is done by leaning to one side of an offset crack with the hands pulling and the feet pushing against the offset side.



Figure 30. Lie-back.

- (d) Inverted pull or push holds (fig. 31), sometimes called underholds, permitting cross pressure between hands and feet.
- (e) Chimney climbing (fig. 32) where cross pressure is exerted between the back and the feet or hands or knees.
- (6) *Footholds* (fig. 33). The service boot with rubber sole will hold on slabs up to about 45 degrees. On steep slopes the body should be kept vertical, with use being made of small irregularities in the slope to aid friction. Footholds less than $\frac{1}{2}$ inch wide can be sufficient for intermediate holds, even when they slope out.



Figure 31. Inverted pull hold.


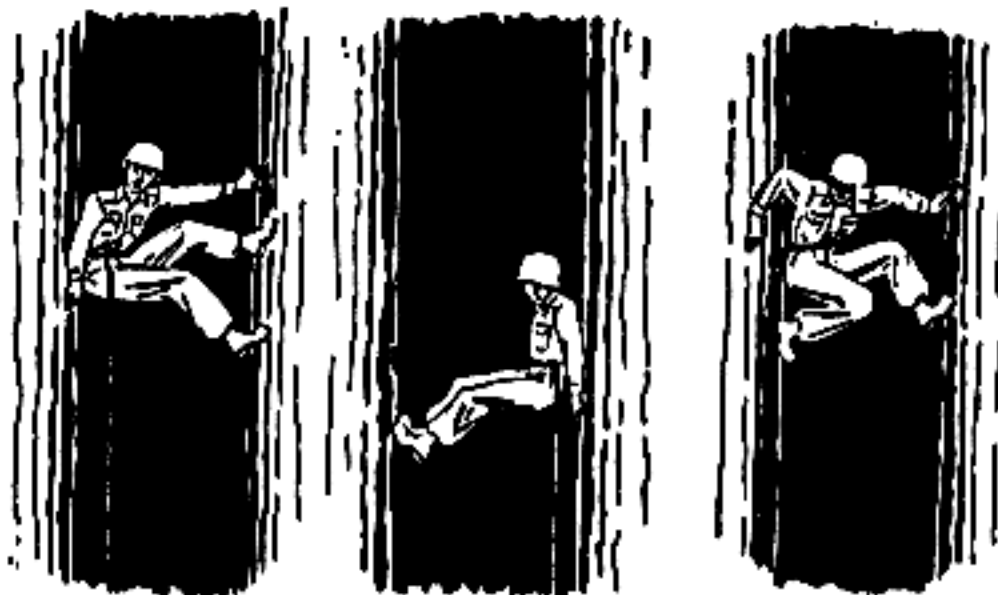


Figure 32. Chimney technique.

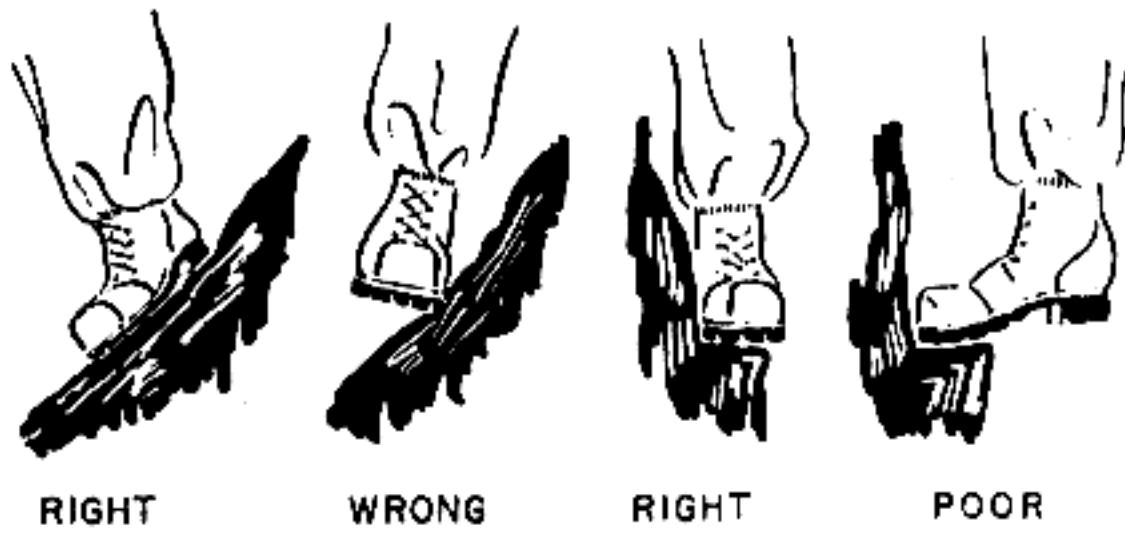

RIGHT

WRONG

RIGHT

POOR

FOR HARD GROUND OR ROCK SLAB

Figure 33. Footholds.

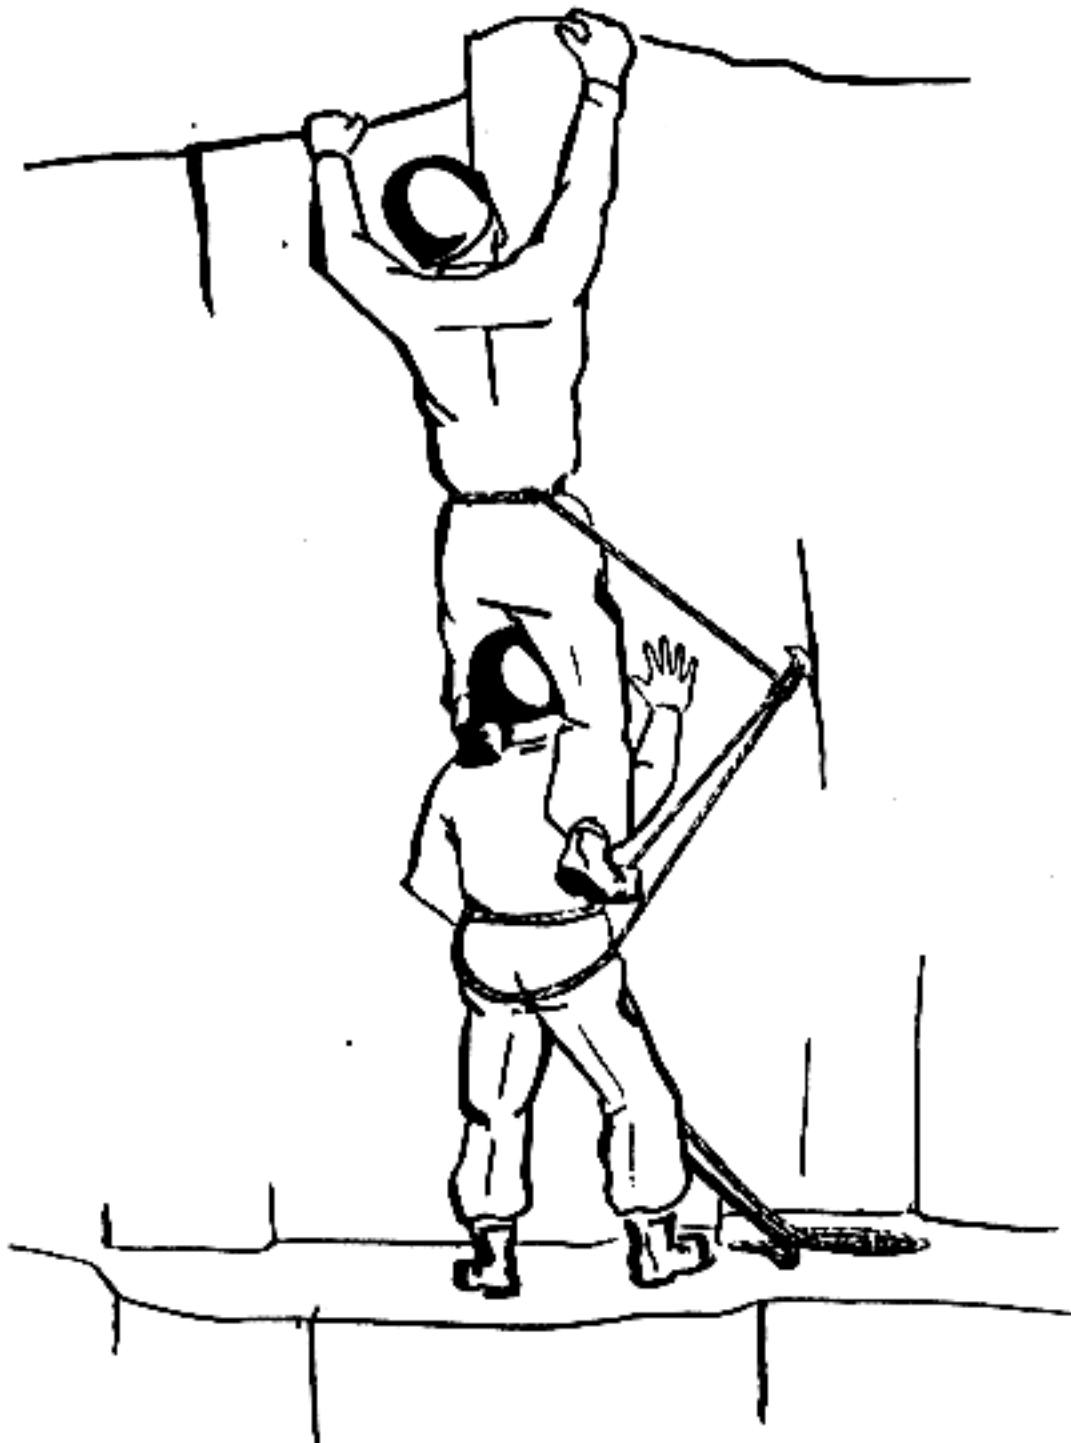


Figure 34. Shoulder stand.

- (7) *Shoulder stand* (fig. 34). The shoulder stand or human ladder, is used to overcome a holdless lower section of a pitch in order to reach the easier climbing above. The lower man is anchored to the rock and belays the leader who uses his body as a ladder to overcome the difficult pitch.
- (8) *Movement of slabs*. Slab is a relatively smooth portion of rock laying at an angle. When traversing, the lower foot is pointed slightly downward to increase balance and friction of the foot. All irregularities in the slope should be utilized for additional friction. On steep slabs it may be necessary to squat with the body weight well over the feet and the hands used alongside for added friction. This position may be used for ascending, traversing or descending. Do not lean back or let the buttocks drag as a slip will be the result. Wet, icy, mossy, or scree covered slab is most dangerous.

d. Use of Holds. A hold need not be large to be good. The climber must roll feet and hands over his holds, not try to skip or jump from one to another. It is, however, often desirable while traversing to use the hop step, in which the climber changes feet on a hold so that he may move sideways more easily. A slight upward hop followed by precise footwork will accomplish this useful step.

e. Margin of Safety.

- (1) A margin of safety is the protective buffer a climber keeps between what he knows to be the limit of his ability and what he actually tries to climb.
- (2) The climber learns his margin of safety by climbing close to the ground, or tied to a rope held or paid out by a trained man above. He climbs first on the easy and obvious holds, next on the more difficult ones, and finally on difficult pitches until he reaches the limit of his ability.
- (3) The margin of safety should be calculated not only for the pitch immediately ahead but for the entire climb. The route and movements of the climber should be planned enough in advance so he never finds himself in situations beyond his ability to overcome. The leader of a group should know the capabilities of his men and make allowances for their limitations.

147. Climbing Ropes and Knots

a. Purpose. Much of the climbing in military operations may be free climbing; that is, without rope. However, on some steep unbroken cliffs, where exposure is great, climbing with rope is

necessary. Fixed ropes and other aids may be needed as well.

b. Types and Characteristics of Ropes. Units engaged in mountain operations will find use for several different types of rope.

- (1) Nylon rope is most commonly used in climbing. The rope is $\frac{7}{16}$ -inch in diameter and is issued in 120-foot lengths. The actual breaking strength when dry averages 3,840 pounds (5 percent variable factor). Strength is reduced by 18 percent when the rope is wet.
- (2) Nylon sling rope is commonly used in 12-foot lengths. It is the same diameter as the nylon climbing rope.
- (3) Manila rope, $\frac{1}{4}$ -inch in diameter and larger will be used in the construction of various types of riggings requiring greater length. This rope is better than nylon for suspension traverses and rope bridges because it has less elasticity. When manila rope is bent sharply, as around a snaplink, it loses a portion of its strength at the bend.

c. Care of Rope. Because the rope frequently is the climber's life line, it deserves a great deal of care and respect.

- (1) The rope should not be stepped on or dragged on the ground. Small particles of dirt will be ground between the strands and slowly cut them.
- (2) The rope should not be in contact with sharp corners or edges of rock, which will cut it.
- (3) Keep the rope dry as much as possible. If it has become wet, dry as soon as possible to prevent rotting.
- (4) Do not leave the rope knotted or tightly stretched longer than necessary, and do not hang it on sharp edges such as nails.
- (5) When using rope in installations, (suspension traverses, rope bridges, etc) do not let one rope rub against another, as this may cut and burn the ropes.

d. Rope Management (fig. 35). Before using a rope it should be inspected for frayed or cut spots, mildew, and rot. If such a spot is found, the rope should be whipped on both sides of the bad spot and then cut. Climbing rope should never be spliced, since it will be hard to manage at the spliced point. The rope

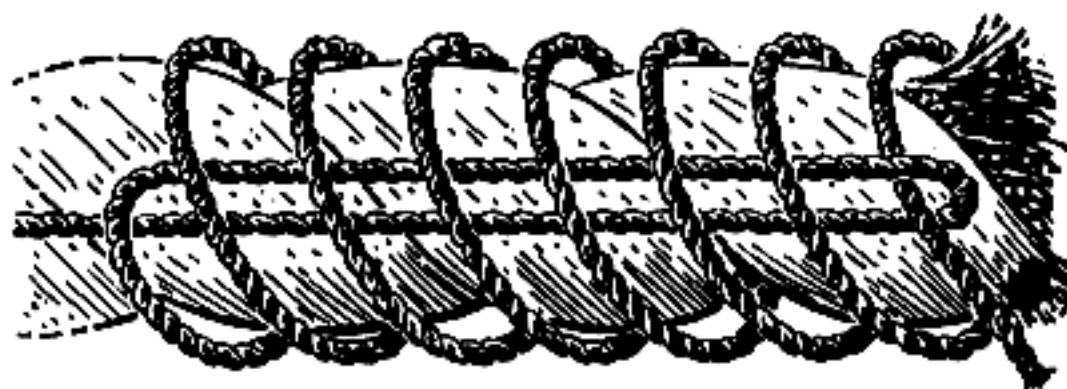


Figure 35. Whipped end of rope.

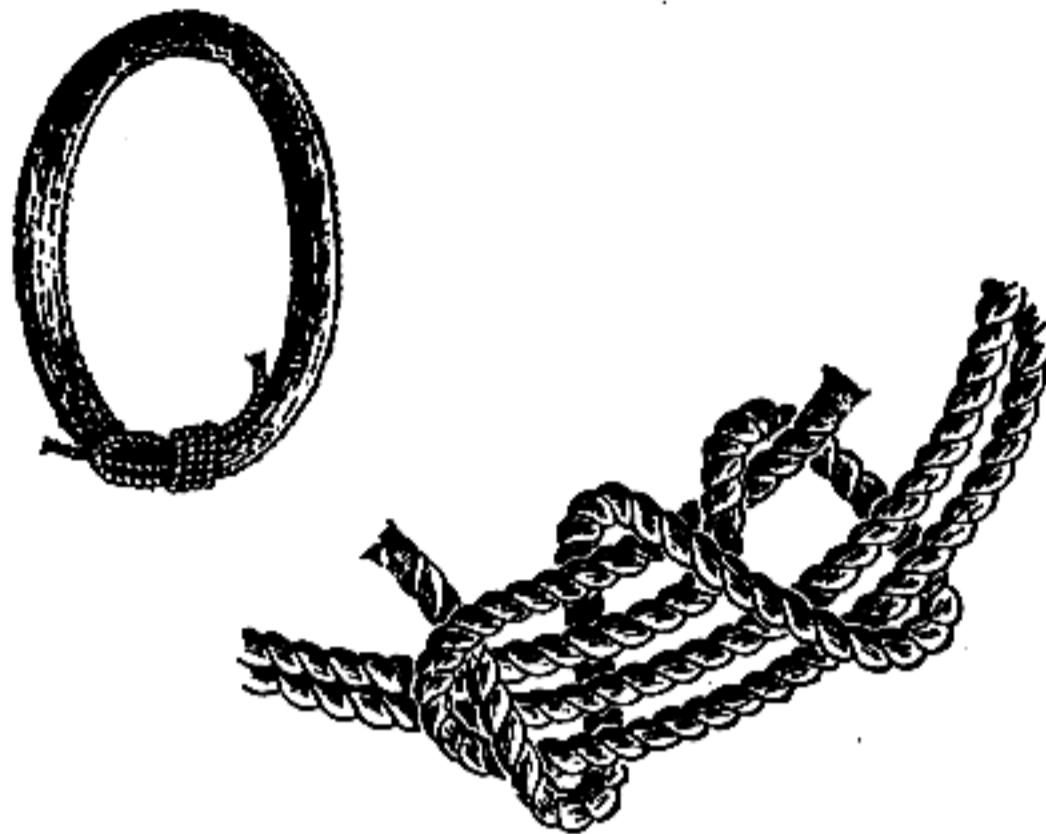


Figure 36. Tie on coil of rope.

should always be coiled except when in actual use (fig. 36). New climbing rope should be marked in the middle by tying a small piece of string around one of the strands. New sling rope as well as any other rope that has been cut from a long piece should be whipped at the ends.

e. Terms Used in Rope Work (fig. 37).

- (1) A bight of rope is a simple bend of rope in which the rope does not cross itself.
- (2) A loop is a bend of rope in which the rope does cross itself.
- (3) A half hitch is a loop which runs around an object in such a manner as to lock itself.
- (4) The running end of the rope is the free end of the rope.
- (5) The standing part of the rope is the fastened part.
- (6) The lay of the rope is the same as the twist of the rope.

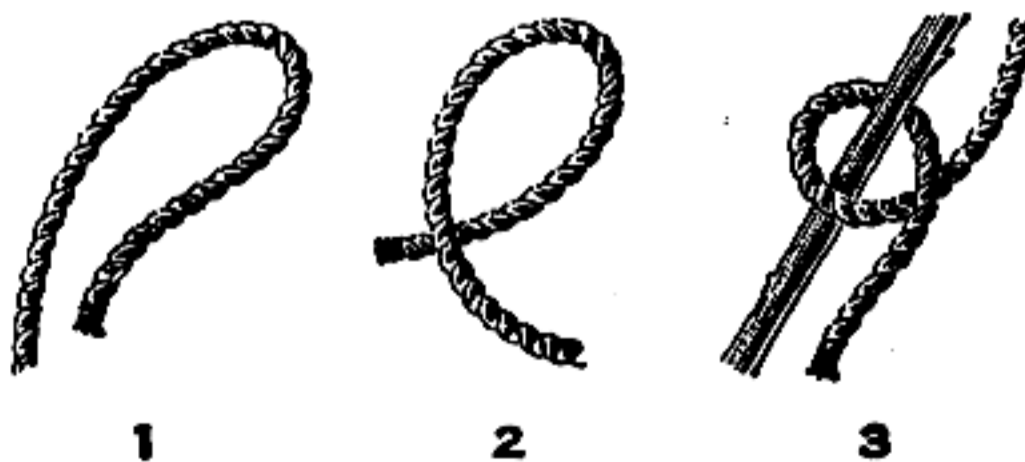


Figure 37. Bight. Loop. Half hitch.

f. Knots. All knots used by the climber fall into four classes. They are—

(1) *Knots to tie the ends of two ropes together* (fig. 38).
Examples of this type of knot are—

- (a) *Square knot.* The square knot is used to tie the ends of two ropes of equal diameter together and must be secured by a half hitch on each side of the knot.
- (b) *Double sheet bend.* The double sheet bend is used to tie the ends of two ropes together, whether of equal diameter or not. It can also be used to tie the ends of several ropes to the end of one rope. When two or more ropes are tied to a single rope the double bends are made with the single rope.

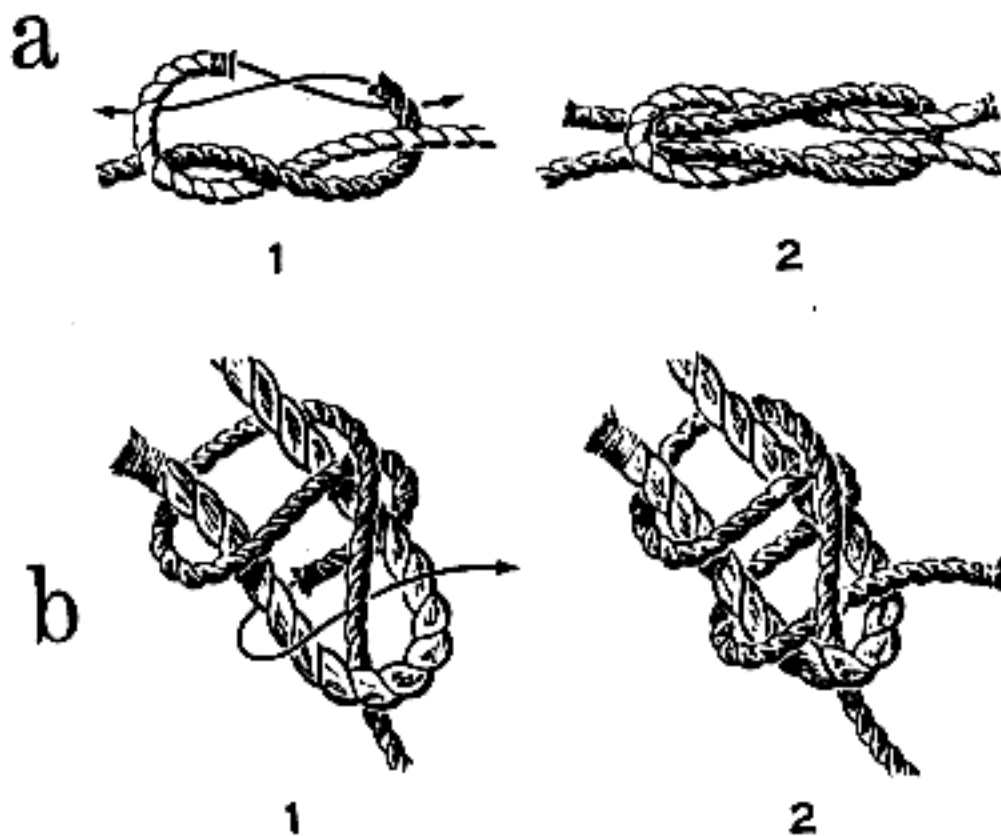


Figure 38. Square knot. Double sheet bend.

(2) *Anchor knots* (fig. 39). Anchor knots are used to tie the end of a rope to any object. An anchor knot is easy to tie and untie. Care must be used in selecting an anchor knot that will not work itself loose when alternate tension and slack are put on the rope. The round turn with two half hitches and the clove hitch may work loose under these conditions, whereas the bowline will not.

- (a) The bowline is also used to tie the end man into a climbing rope and to tie stirrups in the end of a rope.
- (b) The round turn with two half hitches.
- (c) The clove hitch.

(3) *Middle rope knots* (fig. 40). Middle rope knots form a fixed loop or loops in the middle of a rope without using

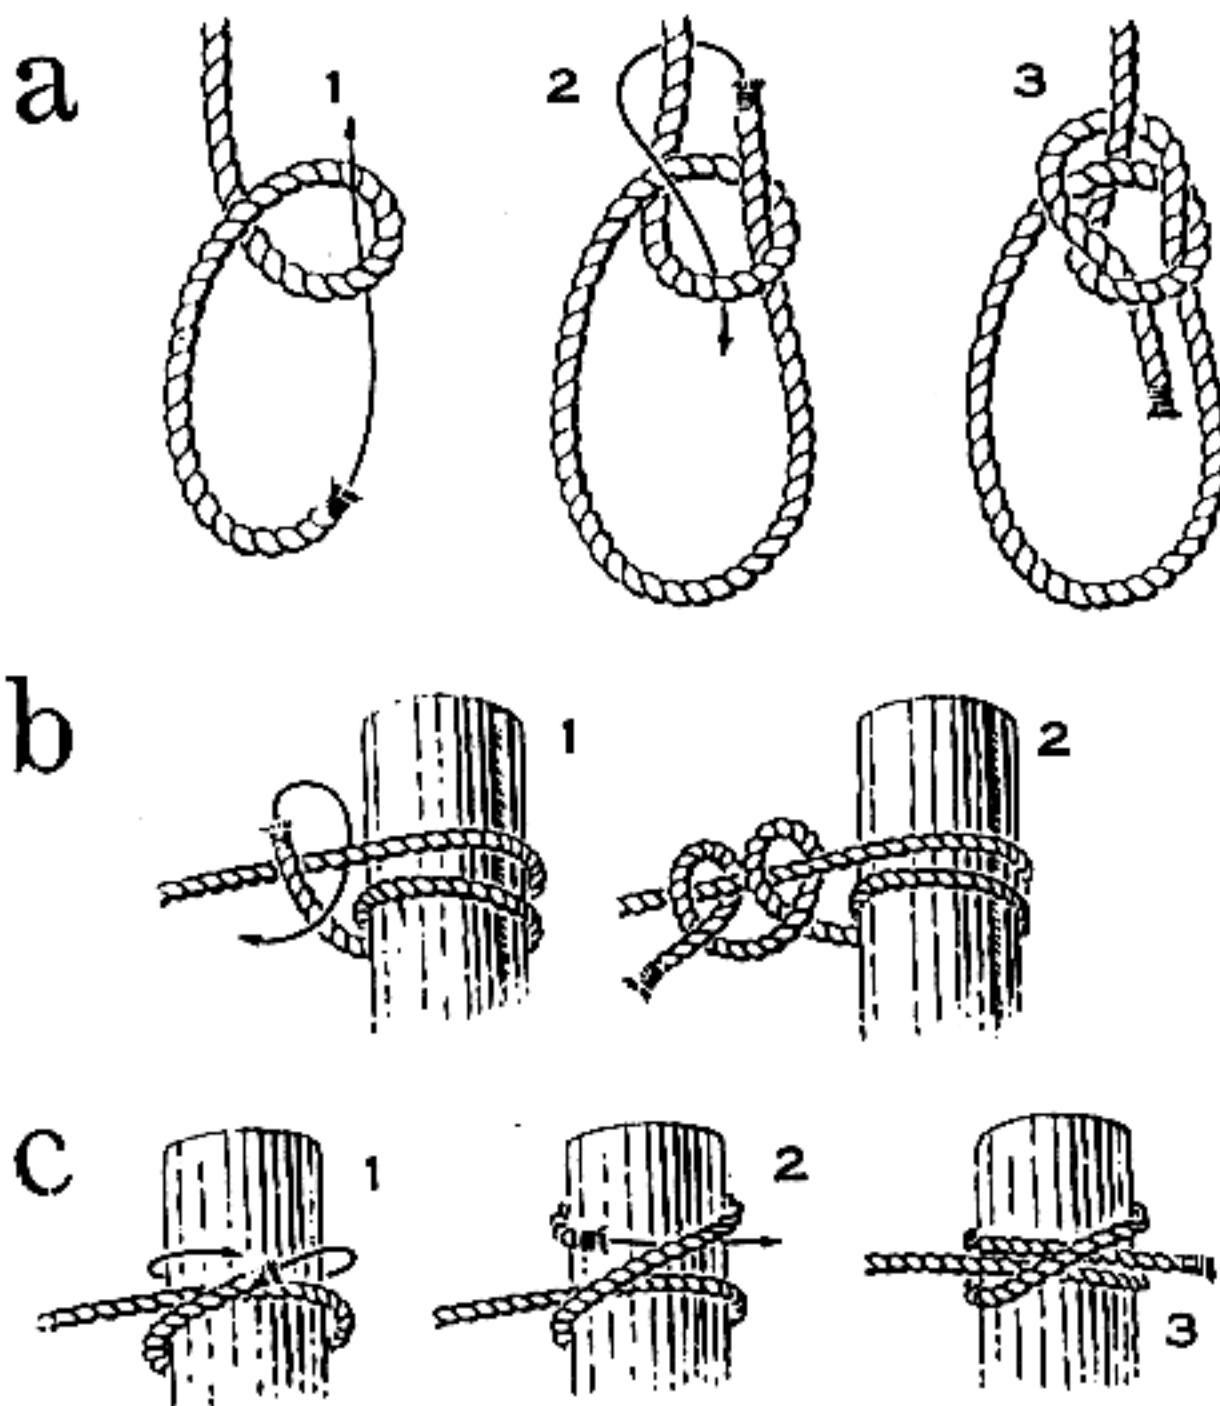


Figure 39. Bowline. Round turn with two half hitches. Clove hitch.

the ends. The butterfly knot is used for the middleman in a roped party and for tightening installation ropes.

(a) The butterfly will form a single loop.

(b) The bowline on a loop forms a double loop.

(4) *Special knots* (fig. 41). Examples of special type knots are—

(a) *Prusik knot*. The prusik knot is tied with a small rope around a large rope; for example, a sling rope around a climbing rope, in such a manner that the smaller rope will slide on the big rope if there is no tension applied and will hold if tension is applied on the small rope. It is tied with a bight of rope or end of rope. When tied with end of rope the knot is finished off with a bowline. The prusik knot is used to anchor a fixed rope to various anchors and in crevasse rescue methods.

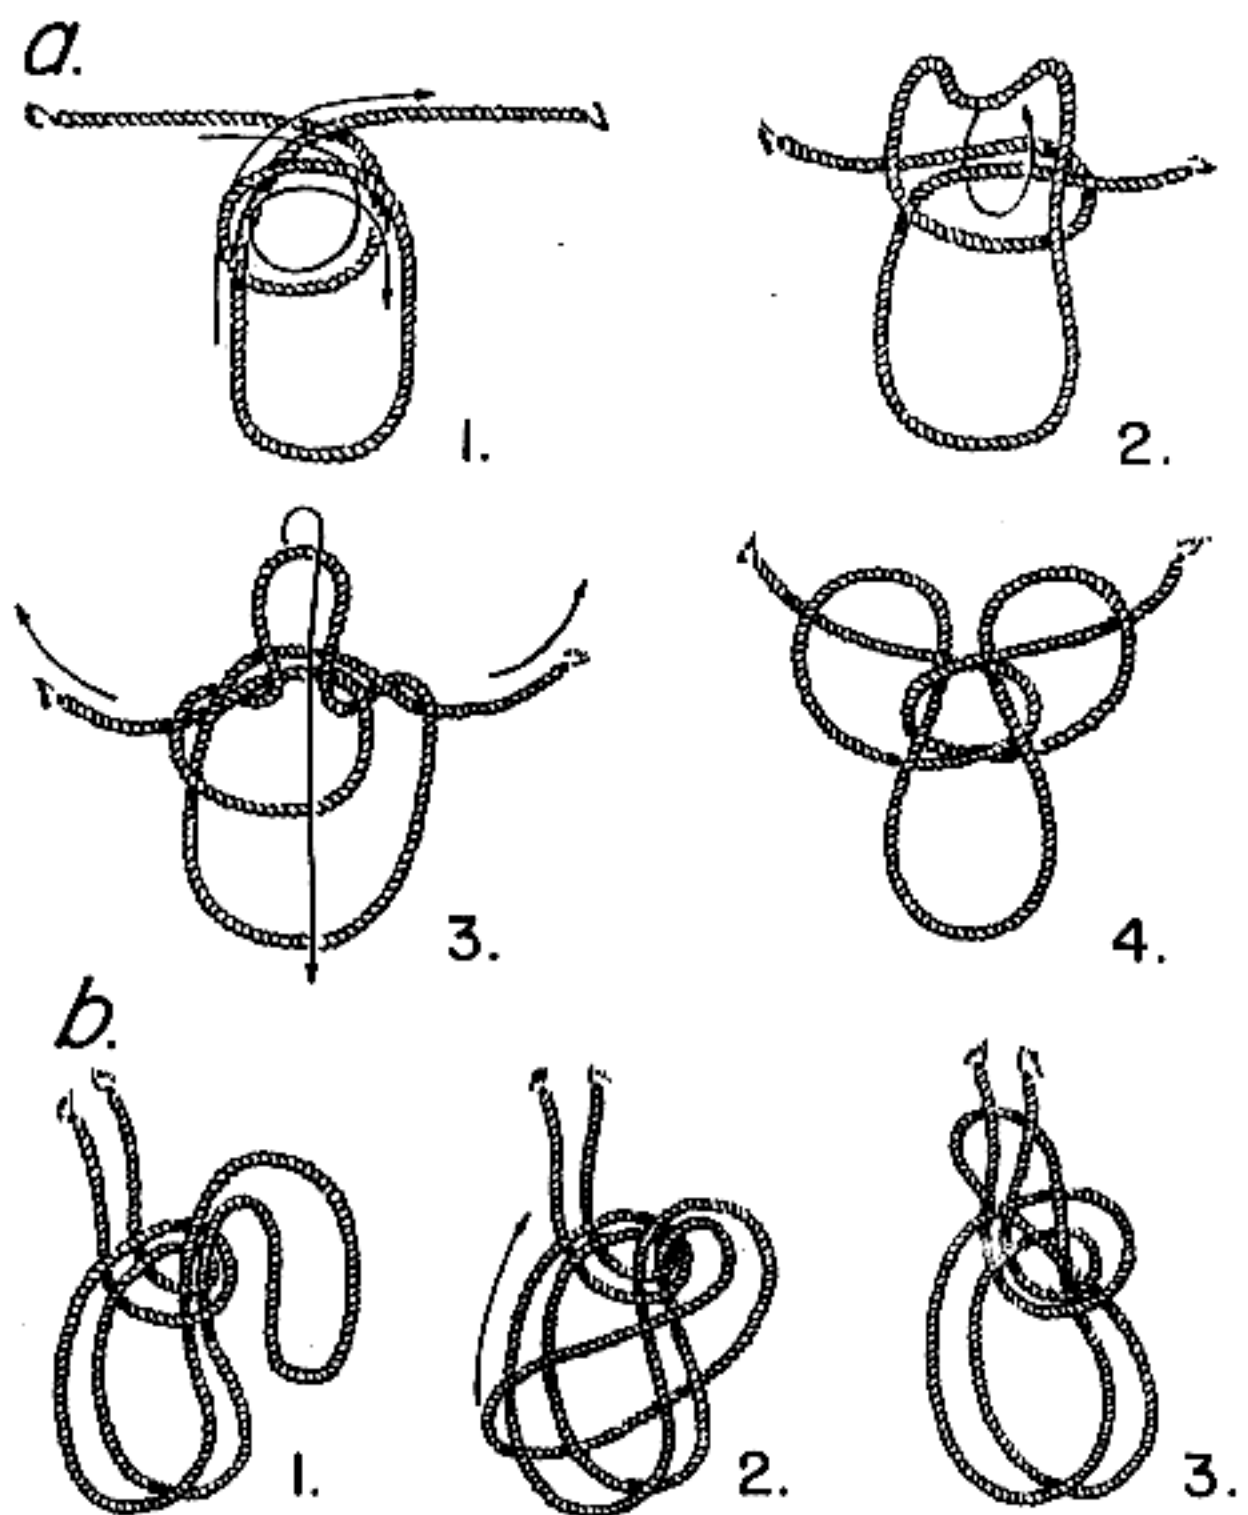


Figure 40. Butterfly knot. Bowline on a loop.



- (b) *Overhand knot.* The overhand knot is used to make a knotted rope for a hand line, to make the carrying rope for a suspension traverse, and stirrups in tension climbing. It is also used to temporarily whip the end of a rope.
- (c) *Bowline on a coil.* The bowline on a coil is used by the end man on a climbing rope to take up extra and unnecessary slack.
- (d) *Three loop bowline.* The three loop bowline will provide three bights, two of which can be adjusted against the other one. It is used mainly for a 4-piton anchor and in evacuation procedures.
- (e) *Figure-of-eight slip knot.* The figure-of-eight slip knot is used as an anchor knot on fixed ropes.

- (f) *Transport knot.* The transport knot is used to secure the tightening arrangement on rope installations and consists of a slip knot and half hitch.

148. Pitons, Snaplink, and Hammer


a. *Purpose.* In conjunction with rope climbing and rope installations, pitons are driven into cracks in the rock to provide—

- (1) A secure point on the cliff to which the rope may be hooked by means of a snaplink. If the leading climber falls, he may be held, pulley-wise, by a man below him. Successive pitons are driven as the climber moves upward.
- (2) Secure points along the course of a fixed rope so that it will give greater support to troops using the rope.

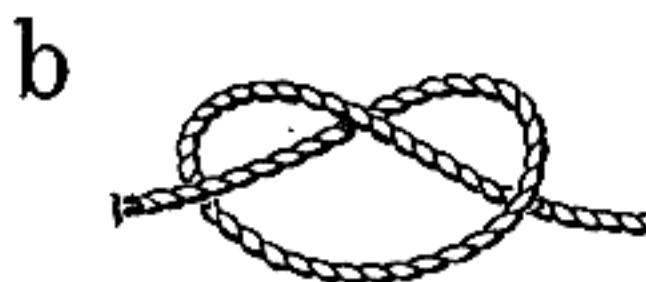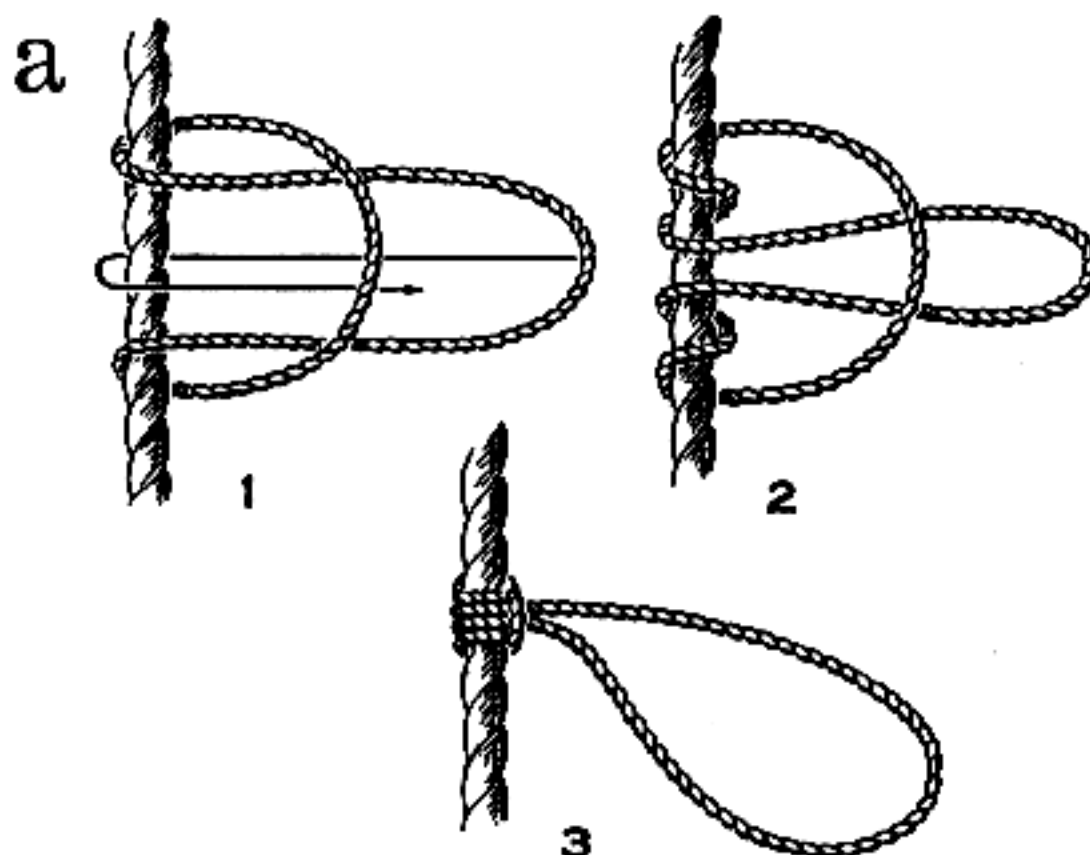

a—Prusik knot
b—Overhand knot

Figure 41.

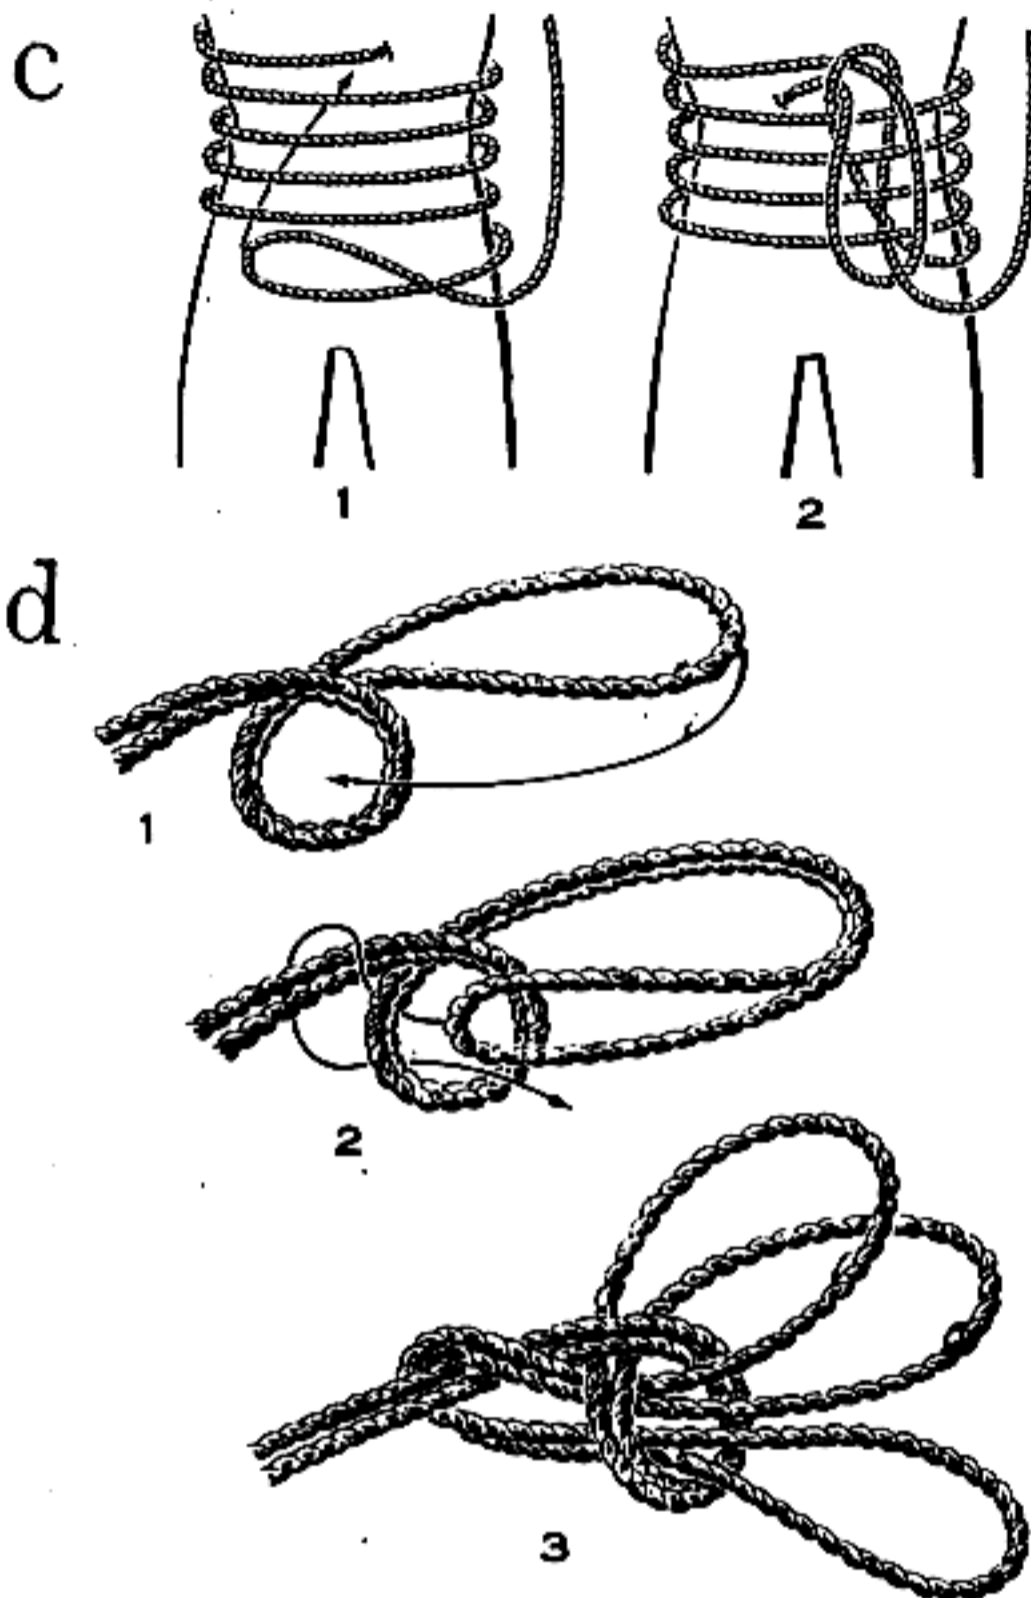


c—Bowline on a coil
d—Three loop bowline

Figure 41—Continued

(3) Deadman anchor points for rope installations.

b. *Types of Pitons* (fig. 42). There are four types of pitons for rock—

- (1) Vertical, for flush vertical cracks.
- (2) Horizontal, for flush horizontal cracks and for offset horizontal or vertical cracks.
- (3) Angle, for wide horizontal or vertical cracks. These must be placed with the wide or open side down in horizontal cracks and open side against either wall in vertical cracks.
- (4) Wafers for shallow cracks, vertical or horizontal.

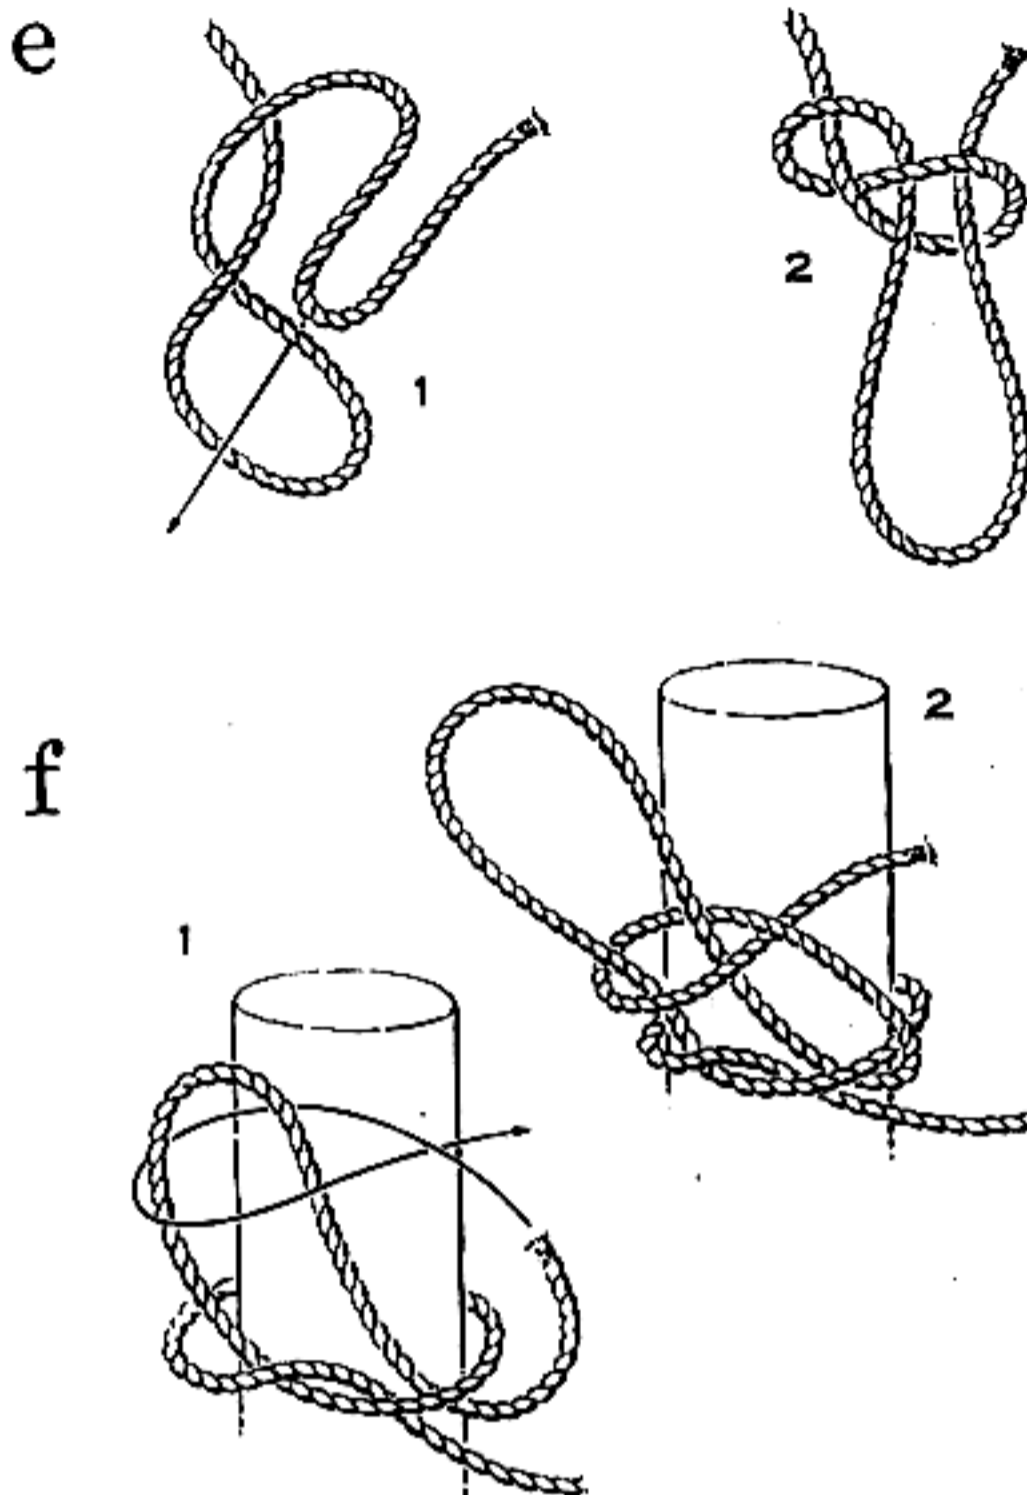

e—Figure-of-eight slip knot
f—Transport knot

Figure 41—Continued

c. *Placing of Pitons* (fig. 43). Pitons are placed to increase the climber's safety. If well placed and tested they will limit his fall to twice the distance he is above the piton plus the amount of slack the belayer lets run. In placing pitons the climber should—

- (1) *Study the rock.* See that driving of a piton will not split or weaken it. Test rock for soundness by tapping with hammer. In hard, solid rock select a crack which is wide enough to admit $\frac{1}{8}$ to $\frac{1}{2}$ of the piton shaft before driving piton in. The driving of pitons in soft, rotten rock is not always practical. When this type of rock must be used, loose rock from the crack should be removed before driving the piton. In this type of rock it is not necessary to be able to insert the piton into the crack as far as in

solid rock. Select the right piton; the one that the rock will support best and that the snaplink can be hooked into after the piton is driven in.

- (2) *Drive the piton.* While driving watch the rock to see that it is not being weakened by further cracking. Watch the piton to see that it goes in smoothly and notice if the point hits a dead end. Listen to the piton's sound at each blow; good verticals and horizontals usually go in with a rising pitch; wafer and angle pitons will have no noticeable pitch so long as the ring is swinging free. Drive the piton with moderate strokes, similar to a finishing nail. It is advisable to have the piton attached

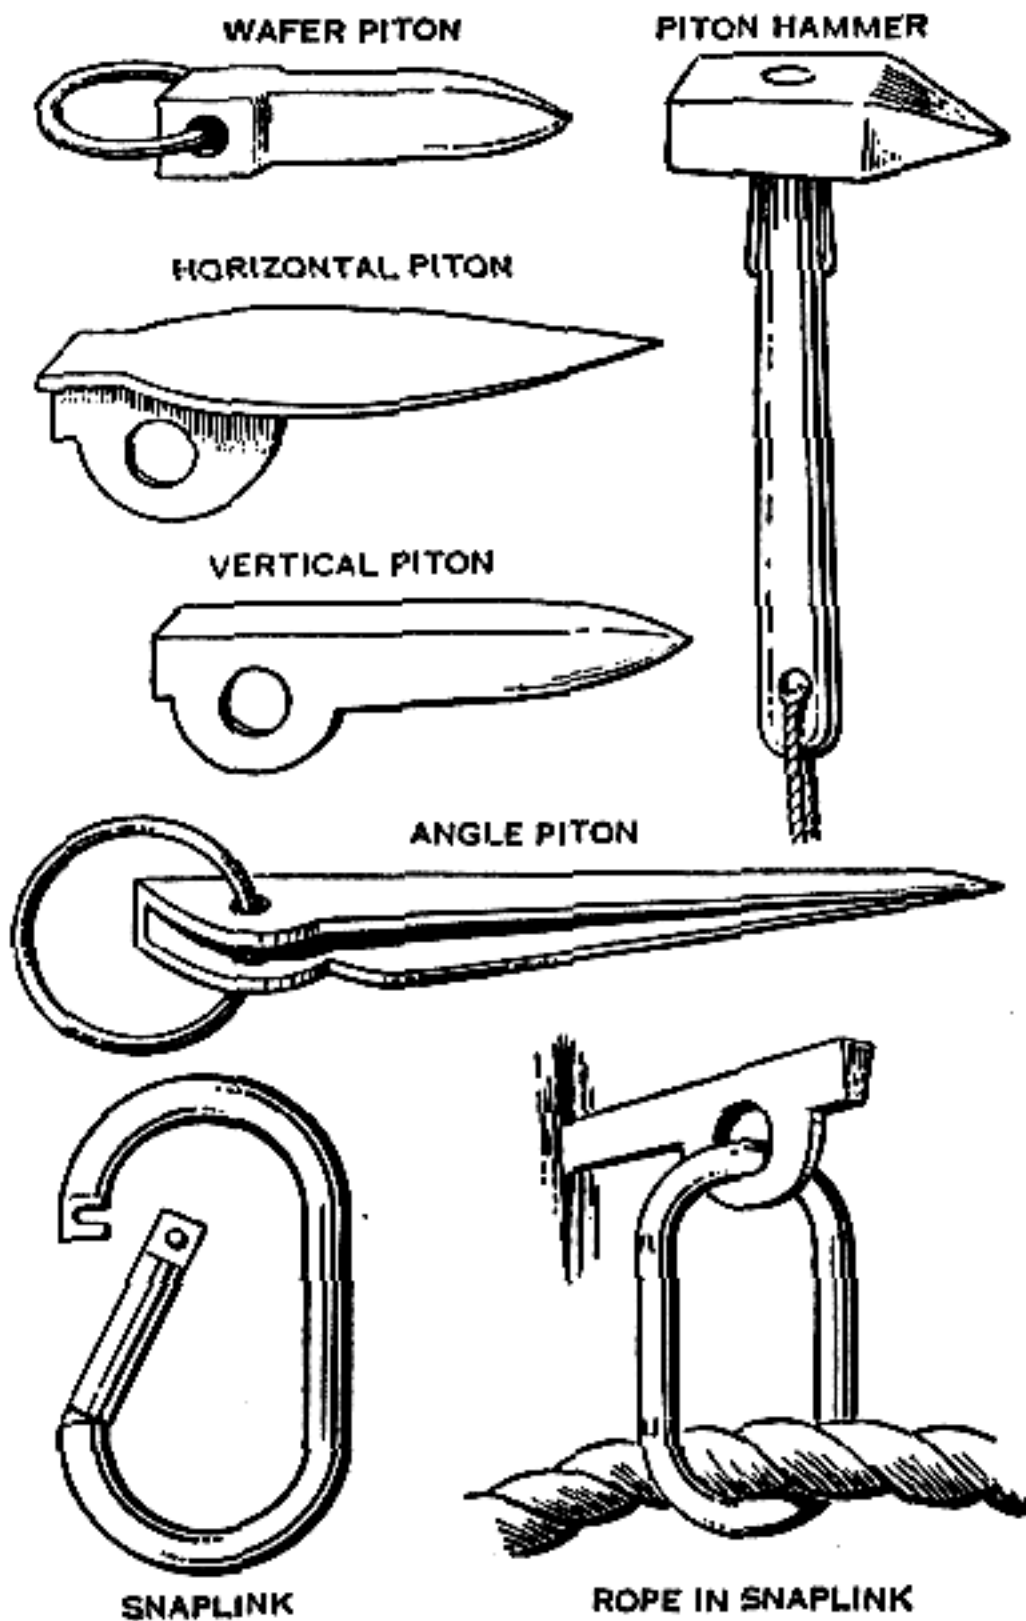


Figure 42. Pitons and snaplink.

to the hammer thong or to the sling rope. If the piton is then knocked out of the crack while it is being driven, it will not be lost. The greater the resistance overcome in driving the piton, the firmer it will be. An appropriately placed and well-driven piton into rock of average strength will withstand a force of from several hundred pounds (wafer) to more than 2,000 pounds (angle) exerted in the direction a fall would take.

- (3) *Test the piton.* Pull up several feet of slack on climbing rope, or use sling rope or piton hammer thong; snap rope into snaplink; grasp rope at least 2 feet from the snaplink. Jerk vigorously outward, downward, and to each side, meanwhile observing the piton. Repeat if the test is questionable. Tap the piton. If the pitch has changed much, drive the piton in as far as possible; if the sound regains its original pitch the piton is good. If not, drive the piton in another place.

d. Snaplink. This is used to fasten the rope to the piton, and it will hold a load of 2,000 pounds. When the gate is closed in snapping it into the piton, the climber should see that the snaplink will not cause unnecessary friction as he climbs beyond it, and that the gate is not likely to open accidentally due to pressure of rock, rope, or piton.

e. Piton Hammer. The piton hammer is used to drive pitons. The point is used for chipping rock or ice and cleaning out piton cracks, and not for pulling out pitons. The hammer is too lightly constructed to stand the stress. It is provided with a leather thong to secure the hammer to the body. When not in use the hammer is carried in the hip or breast pocket.

f. Second-Hand Pitons. Pitons that have been used, removed, bent, and straightened should not be used. In training areas pitons already in place should not be trusted, inasmuch as weathering will loosen them in time, but should be tested and redriven until the climber is certain of their safety.

g. To Remove Pitons. The climber should knock them back and forth in the crack with a piton hammer or rock, and when they are somewhat loosened, pull them out with a bight of the climbing rope or sling rope, or hammer thong, which has been hooked into a snaplink. It is advisable to be well braced when pulling out pitons, as they often come out very suddenly, and to see that no one is close enough to be struck by the extracted piton.

149. Belays

a. Purpose. In party climbing two or three men are tied in to a 120-foot length of rope. Belaying provides the necessary

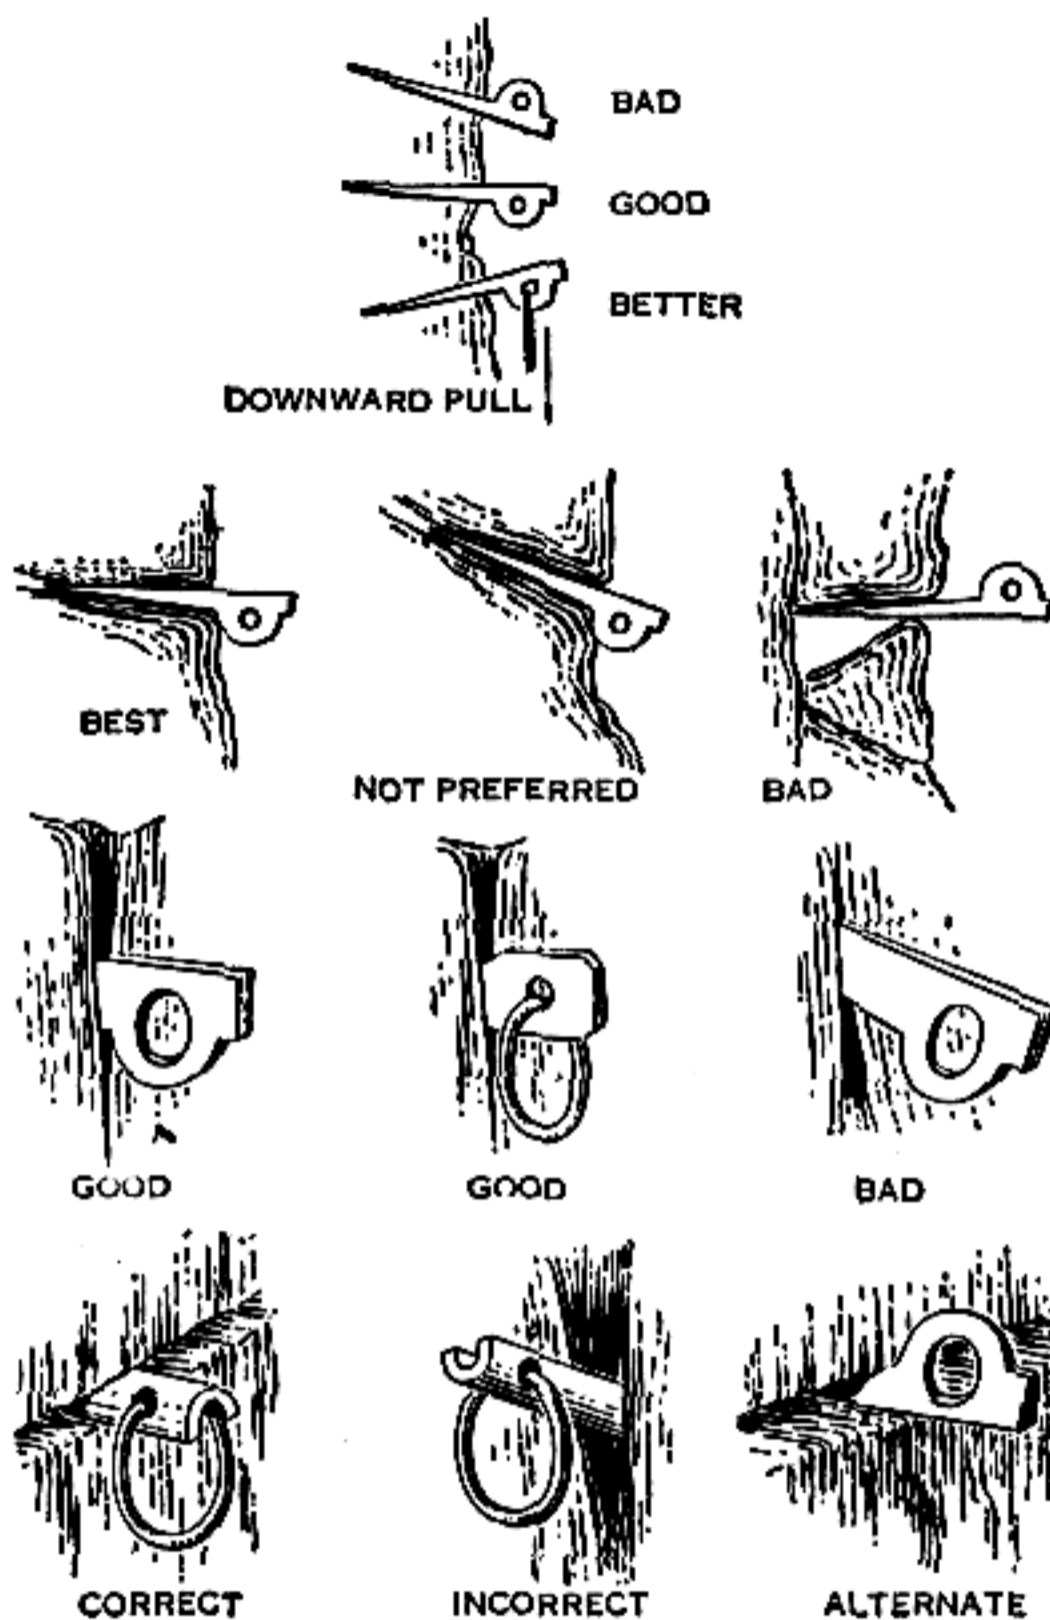


Figure 48. Placing of pitons.

safety factor or tension, enabling the party to climb with greater security. Without belaying skill, the use of rope in party climbing is a hazard, not a help. When any one man is climbing, he is belayed from above or below by another man who may use any one of several belaying positions. Belaying is also used to control descent on fixed installations. A static belay is one which allows no running of the rope. A dynamic belay is one in which the rope is allowed to run slightly and the fall is stopped more gradually.

b. *Procedure for All Positions.* The belayer must perform the following duties:

- (1) Run the rope through his guiding hand, which is the

hand on the rope running to the climber, and around his body to his braking hand, and make certain that it will slide readily.

- (2) Anchor himself to a reliable rock projection or well placed piton, with a portion of the climbing rope or his sling if his position is unsteady.
- (3) Make sure remainder of rope is so laid out as to run freely through the braking hand.
- (4) See that rope does not run over sharp edges of rock.
- (5) Be constantly alert to the climber's movements in order to anticipate his needs. Avoid letting too much slack develop in the rope through constant use of the guiding hand. Gently tug the line running to the climber, thus sensing his movement. Avoid taking up slack too suddenly, as this may throw the climber off balance. When taking up slack the braking hand is not brought in front of the guiding hand, but just behind the guiding hand. This allows the braking hand to slide back and to remain constantly on the rope.
- (6) Brace well for the expected direction of a fall, so that the force of the fall will, whenever possible, pull the belay man more firmly into position. A climber should neither trust nor assume a belay position which he has not tested.
- (7) Where necessary, seek a belay position that offers cover and concealment.
- (8) Be able, in case of a fall, to perform the following movements automatically:
 - (a) Relax the guiding hand.
 - (b) Let the rope slide enough so that braking action is applied gradually. This is done by bringing the braking hand slowly across the chest or in front of the body.
 - (c) Hold belay position, even if this means letting the rope slide several feet.

c. Belay Positions (fig. 44). There are three main types of belay positions—the sitting, the standing hip, and piton belays. All of these may be made more secure when the belayer is tied with a section of the climbing rope or the sling rope into a belay. When the climbing rope is used, a butterfly knot is tied into the rope which is secured with a snaplink and a piton. In using the sling rope, it is passed through the snaplink and around the belayer and then secured by a square knot. In both cases it is important that the anchor rope has the proper length without slack so that the belayer will not be pulled out of his position

when holding a fall. Generally, the belay rope is placed below the anchor rope on the body to prevent rope-to-rope contact and to speed up the getting into a belay for pitons.

- (1) *Sitting belay.* This is normally the most secure and preferred position. The belayer sits and attempts to get good triangular bracing by his legs and buttocks. Legs should be straight whenever possible, and the guiding hand must be on the side of the better braced leg. The rope should run around the hips. If the belay spot is back from the edge of a cliff, friction of the rope will be greater and will simplify the holding of a fall, but the direction of pull on the belayer will be directly outward. The rope should not pass over sharp edges.



Figure 44. *Sitting belay.*

- (2) *Standing hip belay* (fig. 45). This is a weaker belay position and is only used where the sitting belay is not possible. An anchor for the belayer is essential. The belayer takes up a secure, well braced position. If possible, the back or shoulder is braced against the rock. The rope is placed around the back above the heavy portion of the hips and in front to the braking hand in such a way that the belayer is pulled more firmly into position when a fall is held. Generally, the

climbing rope is placed below the anchor rope of the belayer.

- (3) *Piton belay* (fig. 46). As soon as the leading climber has placed a reliable piton and placed his rope into a snap-link which has been placed into the piton, the climber gives the signal "Belay for Piton" to the belayer. The belayer should run the belay rope below his buttocks and a low anchor in line with the direction of pull. The breaking arm should be extended. When a fall occurs, both knees should be bent to prevent the rope from sliding above the buttocks. As much rope as necessary is allowed to slide through the hand while the braking hand is brought in with steadily increasing resistance across the body in a dynamic belay. A fall is easier to hold with a piton belay than with a sitting or standing belay

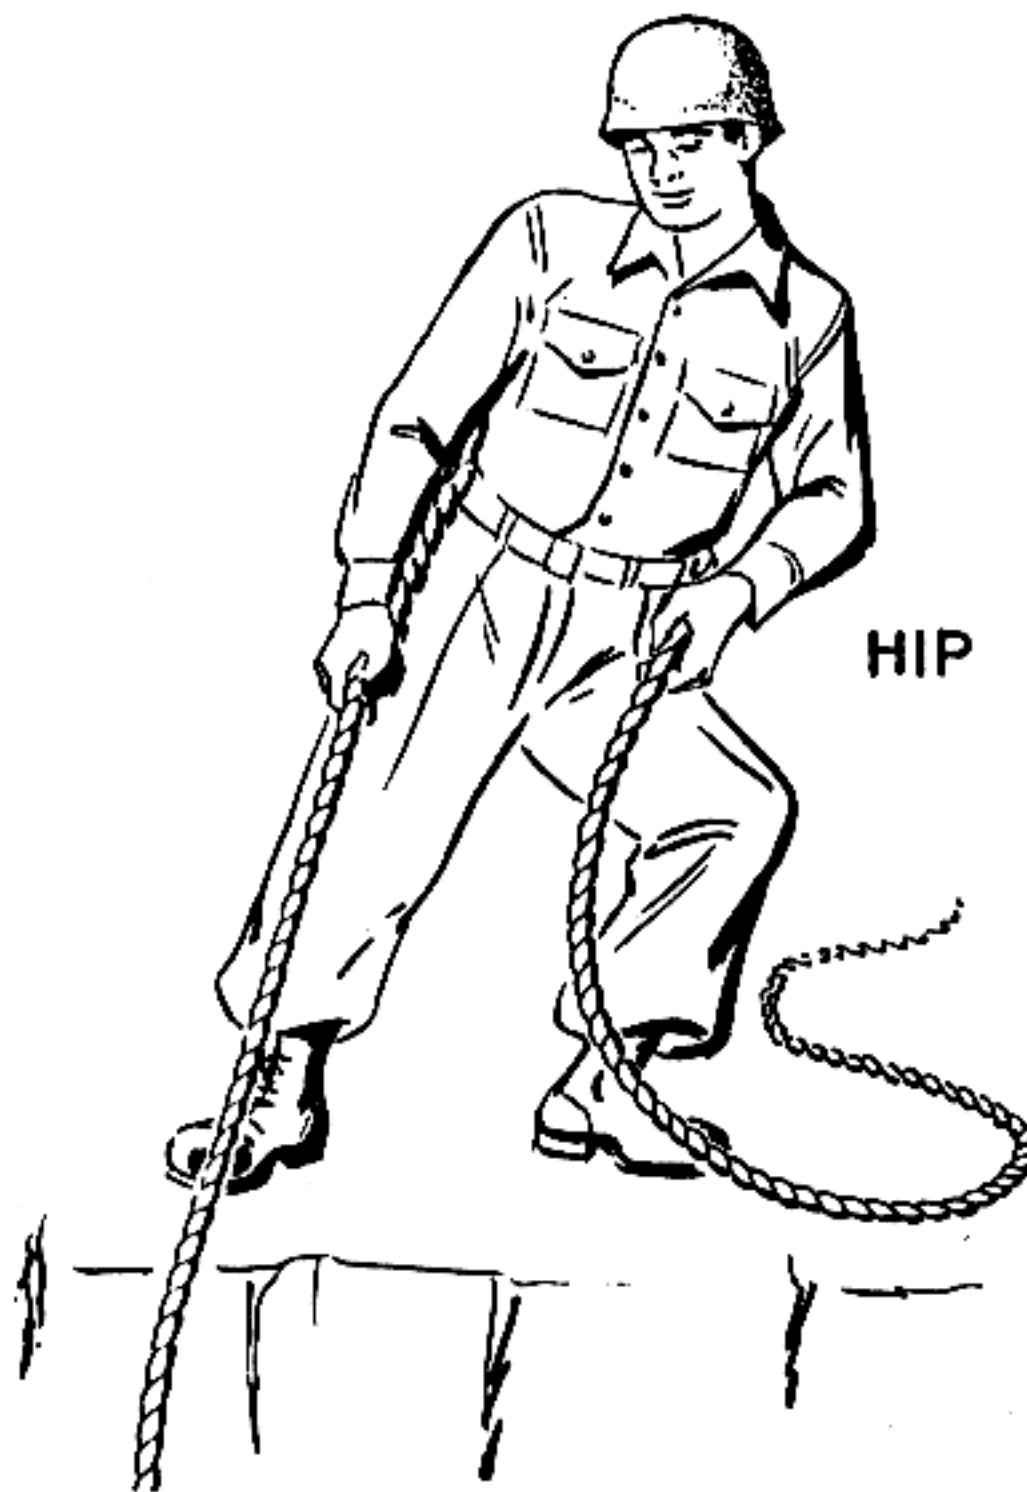


Figure 45. Standing hip belay.

because of the added friction between rope, rock, and snaplinks. For this reason it is essential that the belayer use a dynamic belay to prevent the fall being stopped suddenly. When belaying a climber in a traverse which is near or horizontal to the belayer, the belayer must anticipate a pull sideways and straight forward, and should place the climbing rope above his buttocks and be anchored in.

- (4) *Use of natural anchors.* Where possible, the leading climber should pass his rope behind rock projections or trees which can give the same protection as a piton. He should avoid passing the rope over sharp edges or small cracks where the rope could jam or cause too much friction. When a rock or tree belay has been established, the



Figure 46. Piton belay.

climber should signal "Belay for rock, or tree" as the case may be and the belayer assumes a piton belay position. Likewise the belayer can increase his holding capability by placing the belay rope around a tree or rock nubbin in belaying directly to these natural objects.

d. Belaying. After the climber has taken up a belay position, he calls, "On Belay," "Test," which is answered by the man being belayed in calling "Off Belay," "Testing" at which time he puts his weight gradually on the rope after he has gone off belay. Care must be taken that the rope is not jerked suddenly when starting the test, as this might pull the belayer out of position. The test should be made if possible in the direction of a possible fall. If, during the test, the position is found insecure, the belayer will signal "Off Belay." The climber must release all tension at once and resume his belay position. The belayer must then find another position and have the test procedure repeated. When the position is satisfactory, the belayer calls, "Climb." The climber answers him with the signal, "Up Rope," in order to have the belayer take up the slack before he climbs. This procedure must be followed to prevent accidents.

150. Rappels

a. Purpose. The climber with a rope can descend quickly by means of a rappel—sliding down a rope which has been doubled around such rappel points as a tree, projecting rock, or several firm pitons tied together. Several techniques may be used.

b. Establishing a Rappel.

- (1) In selecting the route, the climber should be sure the rope reaches the bottom or place from which further rappels or climbing can be done.
- (2) The rappel point should be tested carefully, and inspected to see that the rope will run around it when one end is pulled from below and that the area is clear of loose rocks which may be pulled off.
- (3) If a sling rope must be used for a rappel point it should be tied double.
- (4) The first man down should—
 - (a) Choose a smooth route for the rope, free of sharp rocks.
 - (b) Place loose rocks, which the rope might later dislodge, far enough back on ledges to be out of the way.
 - (c) Prevent the doubled rope from twisting together by placing the index finger of the braking hand between the two ropes.

- (d) See that the rope will run freely around the rappel point when pulled from below.
- (5) Each man down will give the signal "Off Rappel," straighten the ropes and see that the rope will run freely around its anchor. When silence is needed a prearranged signal of pulling on the rope is substituted for the vocal "Off Rappel" signal.
 - (6) When the last man is down, the rope is recovered. The climber should pull it smoothly, to prevent the rising end from whipping around the rope, and he should stand clear of falling rope and the rocks which may be dislodged by it.
 - (7) Inspect the rope frequently if a large number of men are rappelling on it.
 - (8) Climbers must wear gloves for all type rappels to protect the palms from severe burns.

c. *The Body Rappel* (fig. 47). The climber faces the anchor point and straddles the rope. He then pulls the rope from behind, runs it around either hip, then diagonally across the chest and back over the opposite shoulder. From there the rope runs to the braking hand which is on the same side as the hip the rope crosses; for example, the right hip to the left shoulder to the right hand. The climber should lead with the braking hand

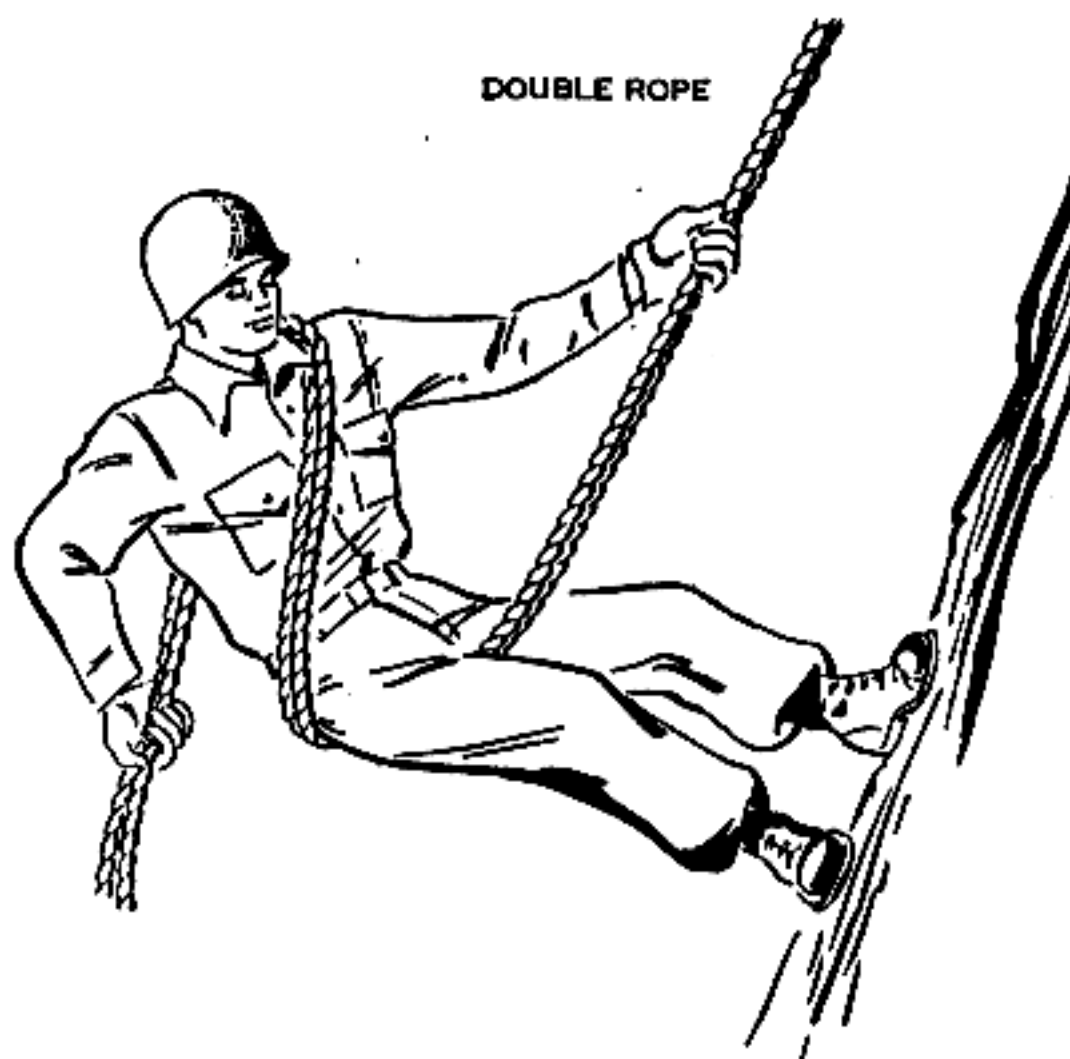


Figure 47. Body rappel.

down and should face slightly sideways. The foot corresponding to the braking hand should precede the other at all times. He should keep the other hand on the rope above him just to guide himself and not to brake himself. He must lean out at a sharp angle to the rock. He should keep his legs well spread and relatively straight for lateral stability and his back straight since this reduces unnecessary friction. The collar should be turned up to prevent rope burns on the neck. Gloves should be worn and any other article of clothing may be used as padding for the shoulders and buttocks.

d. *The Seat Rappels.* The seat rappels differ from the body and hasty rappels in that the main friction is absorbed by a snaplink which is inserted in a sling rope seat fastened to the rappeller. This method provides a faster and less frictional descent than the others do. Gloves should be worn to prevent rope burns.

- (1) *Attaching the seat.* The sling rope is placed across the back and to the front with the end which is opposite the braking hand (if braking with right hand, left rope) approximately 8 inches longer than the other. An overhand knot is tied in front of the body. The ends of the

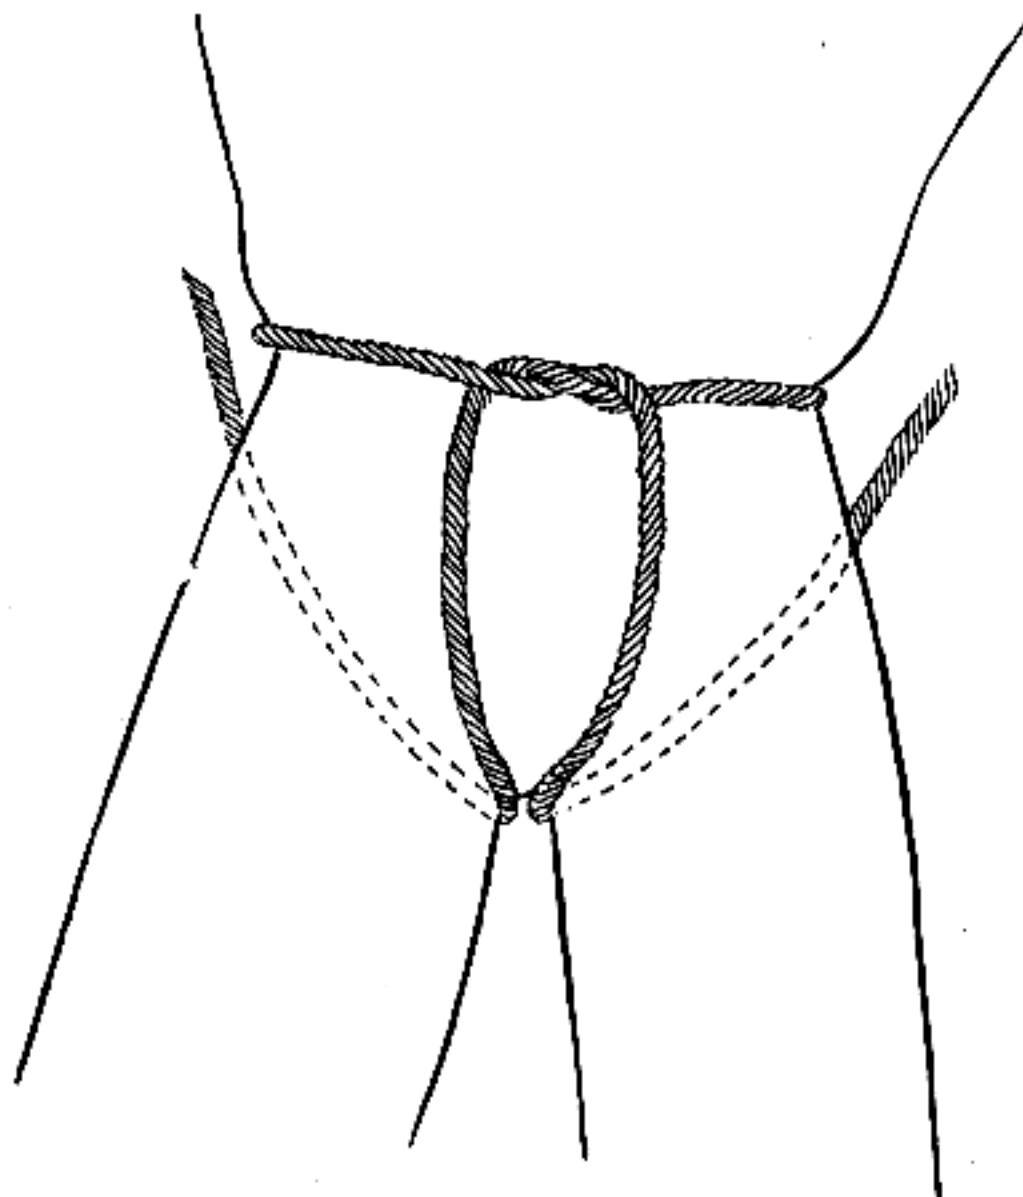


Figure 48. Seat and placing of snaplink in seat.

rope are brought between the legs (front to rear), around the legs and over the hips and tied with a square knot and two half hitches on the side, opposite the braking hand. The snaplink is placed through the single rope around the waist and through the two ropes forming the overhand knot. The snaplink is inserted with the gate down and the opening toward the body. The snaplink is then rotated one half turn so that the gate is up and opens away from the body (fig. 48).

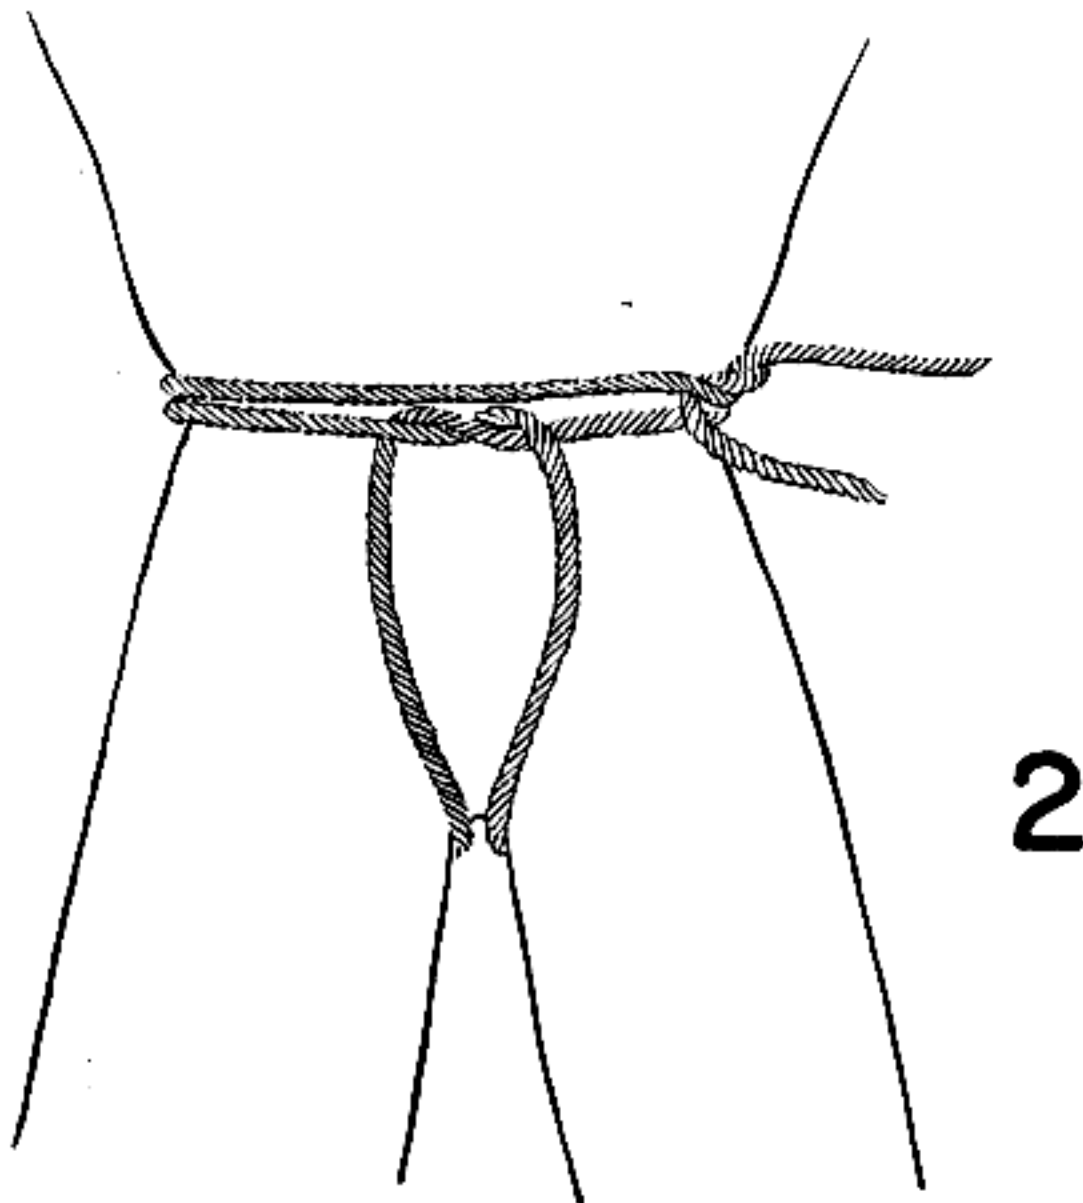


Figure 48—Continued.

- (2) *Shoulder method.* In facing the rappel point the rappeller snaps into the rope which passes up through the snaplink. The rope is then brought over one shoulder and back to the opposite hand (left shoulder to right hand). The same techniques are used in the descent as in the body rappel. This method is faster than the body rappel, less frictional and more efficient for men with packs and during night operations.
- (3) *Hip method.*
 - (a) The rappeller stands to one side of the rope (when braking with the right hand on the left and when

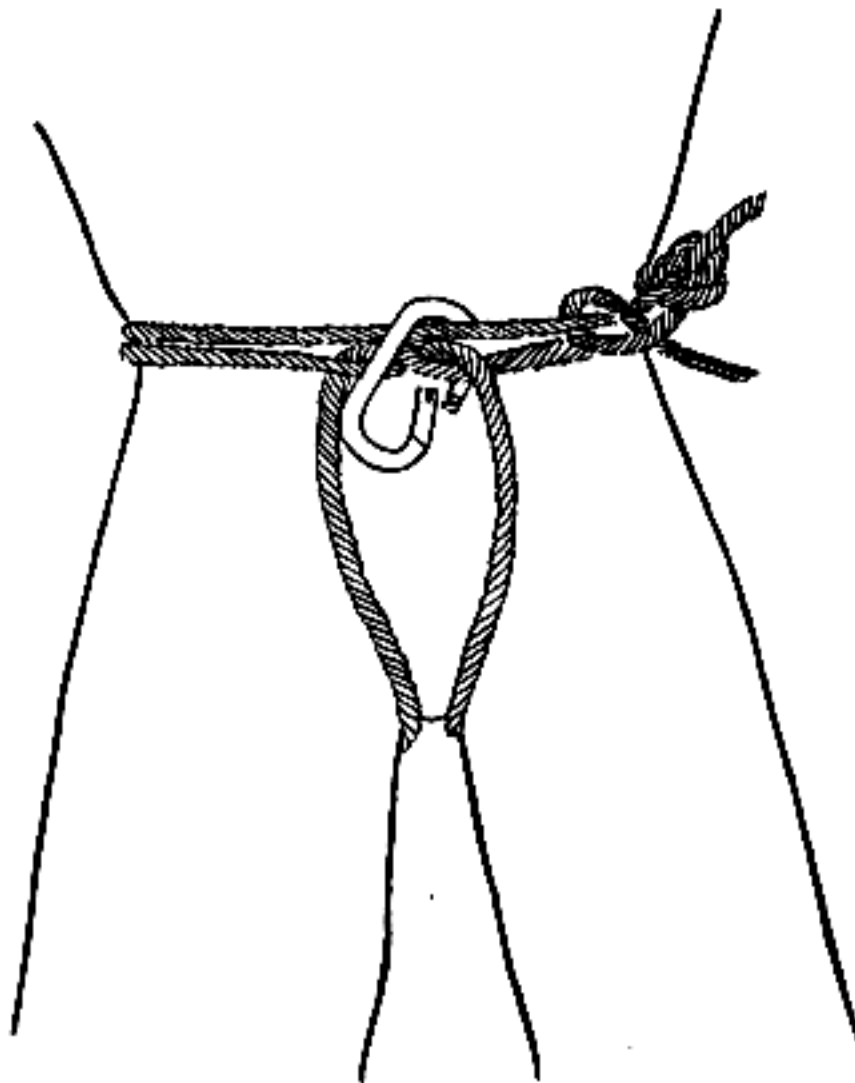


Figure 48—Continued.

braking with the left hand on the right side) and snaps the rope into the snaplink. *Some slack between the snaplink and the anchor point* is taken up and brought underneath, around and over the snaplink and snapped into it again. This results in a turn of rope around the solid shaft of the snaplink which does not cross itself when under tension. When a single rope is used two wraps around the snaplink are made to increase friction. Facing sideways, the climber descends using his upper hand as the guiding and the lower as the braking hand. The rope is grasped by the braking hand with the thumb pointing down and towards the body. The braking hand is held behind and slightly above the hip.

- (b) Braking action is obtained by closing the hand and pressing the rope against the body. The rappeller should lean well out, at an angle from the rock, and make a smooth and even descent. This method is the least frictional and fastest. However, special care must be taken that the rope is snapped correctly into the snaplink to avoid the possibility of the gate being opened by the rope. Loose clothing or equipment

around the waist is apt to be pulled into the snaplink locking the rappel. For these reasons the rappel must be checked carefully before each descent.

e. The Hasty Rappel (fig. 50). Facing slightly sidewise to the anchor, the climber places the rope across his back. The hand nearest to the anchor is his guiding hand and the lower hand does the braking. To stop, the climber brings his braking hand across in front of his body locking the rope and at the same time turns to face up toward the anchor point. This rappel should be used only on moderate pitches or very short, steep pitches. Its main advantage is that it is easier and faster to use than the other methods, especially when the rope is wet.

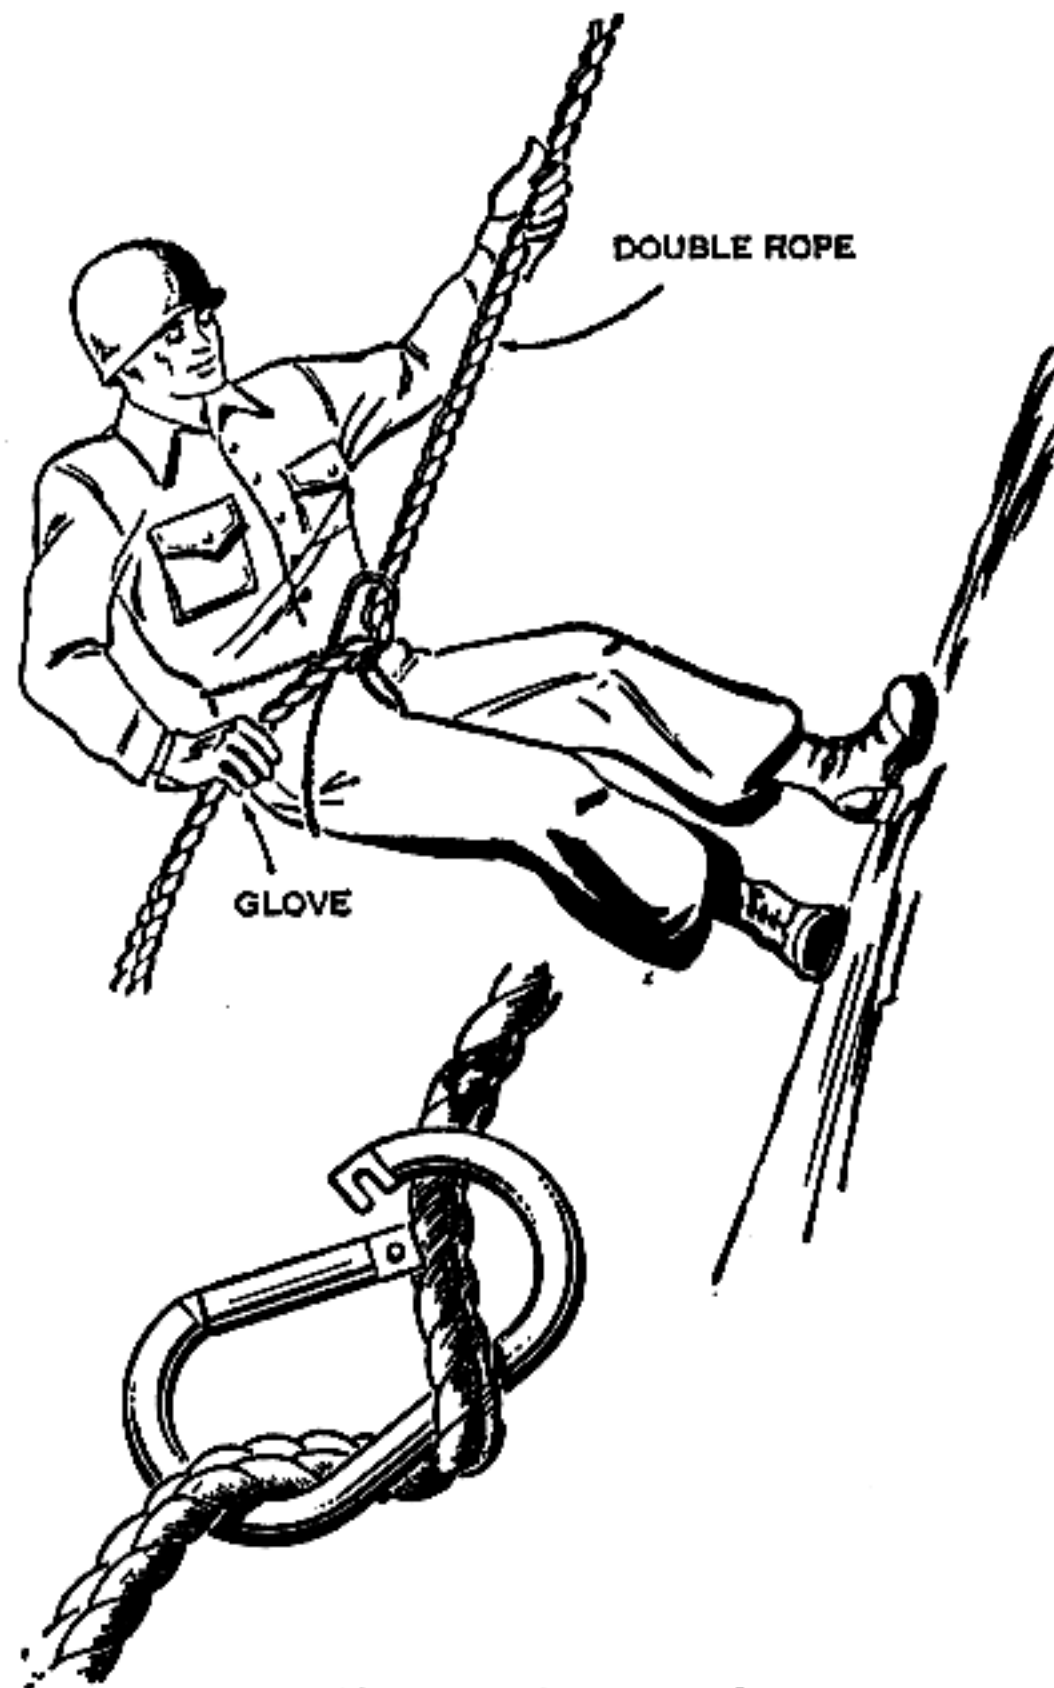


Figure 49. Seat rappel.

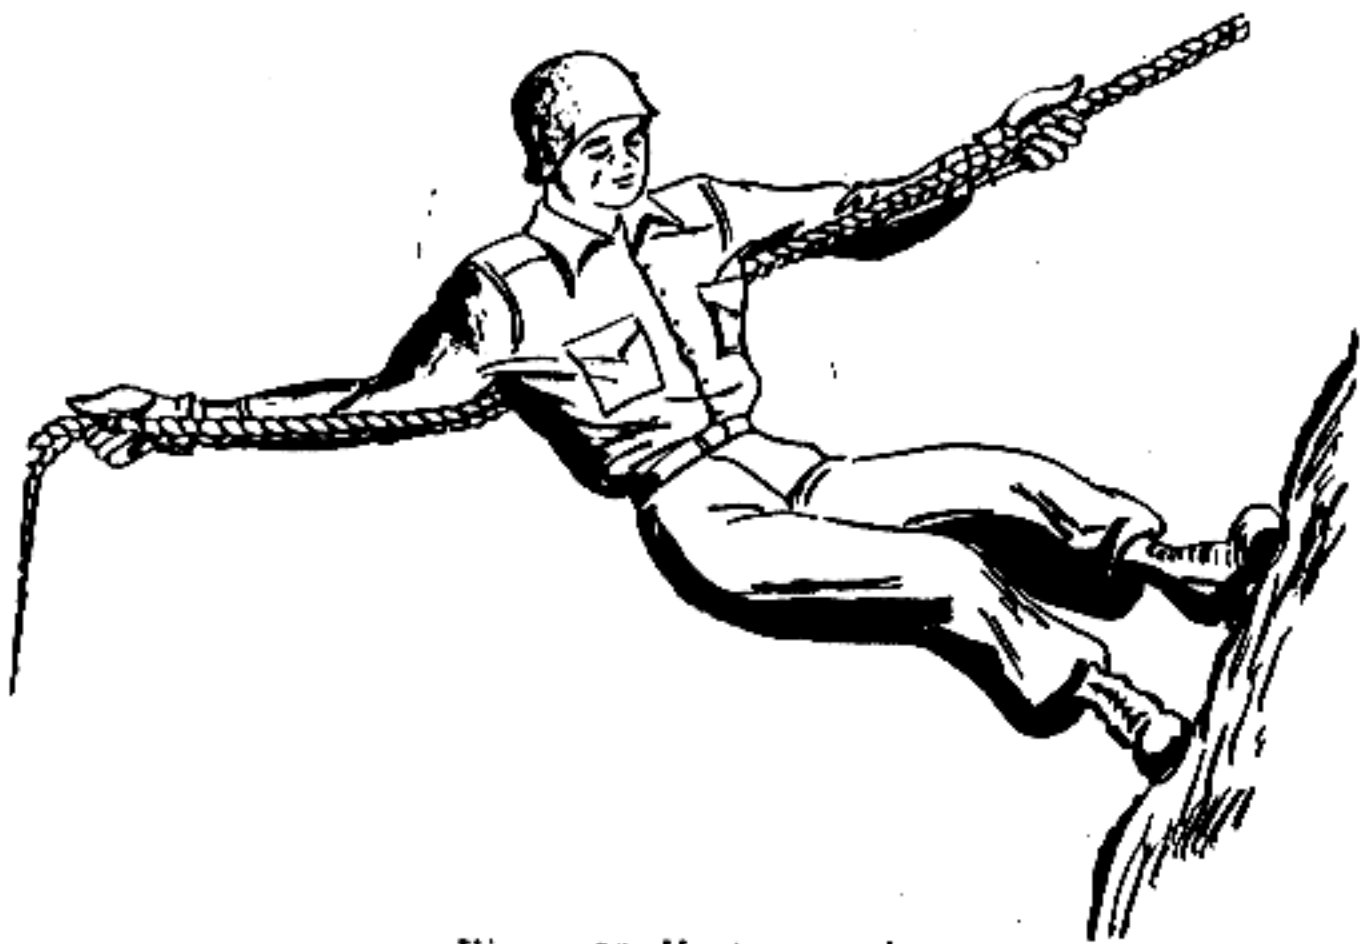


Figure 50. Hasty rappel.

151. Route Selection

a. *General.* Terrain must be appreciated if an efficient route is to be found through it with necessary speed. Every mountain-reconnaissance unit should include climbers experienced enough to be able to estimate friendly or enemy capabilities in the region. Consideration should be given to the time element and skill of the troops involved, equipment available, and the support required. Probable effect of weather on the mission must be studied and care used in route selection to avoid danger of rock slides and other mountain hazards.

- (1) *Scope.* The military mountaineer must make detailed reconnaissance, noting with respect to each rock obstacle, the best approach, height, angle, type of rock, difficulty, distance between belay positions, concealment along the route, amount of equipment, and number of trained climbers needed to accomplish the mission on or beyond the rocks. If the strata dips toward the climber, holds will be difficult as the slope will be the wrong way. However, strata sloping away from the climber and toward the mountain mass will provide natural stairs, with good holds and ledges.
- (2) *Vantage points.* At least two vantage points should be used, so that a three-dimensional understanding of the climb can be attained. Use of early morning or late afternoon light, with its longer shadows, is helpful in

this respect. Actual ground reconnaissance should be made if possible.

(3) *Dangers to avoid.*

- (a) On long routes, changing weather will be an important consideration. Wet or icy rock can make an otherwise easy route almost impossible; cold may reduce climbing efficiency, snow may cover holds; a cloudy night may be too dark for travel; a lifting fog may remove necessary concealment too soon. A weather forecast should be obtained if possible.
- (b) Smooth rock slabs are treacherous, especially when wet or iced after a freeze and rain. Ledges should then be sought.
- (c) Rocks overgrown with moss, lichens, or grass become treacherous when wet. Cleated or nailed boots will then be far better than composition soles.
- (d) Tufts of grass and small bushes that appear firm may be growing from loosely packed and unanchored soil, all of which may give way if the grass or bush is pulled upon. Grass and bushes should be used only for balance by touch or as push holds, not as pull holds.
- (e) Gently inclined but smooth slopes or rock may be covered with pebbles that will roll treacherously underfoot.
- (f) Ridges may be free of loose rock, but may be topped with the most unstable blocks in the region. Moreover, the climber is likely to skyline himself on a ridge. A route along the side of a ridge just below the top is usually best.
- (g) Gullies provide the best defilade, and often the easiest routes, but are more subject to ambush and to rock-falls from natural or enemy sources. The side of the gully is relatively free from this danger.
- (h) Climbing slopes of talus, moraine, or other loose rock is not only tiring to the individual but dangerous, because of the hazard of rolling rocks, to others in the party. Climbers should close up intervals when climbing simultaneously. Large groups should attempt to find numerous parallel routes.
- (i) In electrical storms lightning can endanger the climber. Peaks, ridges, pinnacles, and lone trees should be avoided.

(4) *Rock falls.*

- (a) Falling rock is the most common mountaineering danger. The most frequent causes of rock falls are—other climbers; great changes of temperature in high mountains and resultant splitting action of intermittent freezing and thawing; heavy rain; grazing animals; and enemy fire.
- (b) Warning of a rock fall may be the cry "Rock," a whistling sound, a grating, a thunderous crashing, or sparks where the rocks strike at night.
- (c) Rock falls occur on all steep slopes, particularly in gullies and chutes. Areas of frequent rock falls may be indicated by abundant fresh scars on the rock walls; fine dust on the talus piles; or lines, grooves, and rock-strewn areas on snow beneath cliffs.
- (d) Immediate action is to seek cover if possible, to move if cover is not available. If enough advance warning is given, the climber should watch the falling rock until he knows he is in danger, otherwise he might move directly into its path by blindly trying to avoid it.
- (e) Rock-fall danger is minimized by careful climbing, and by judgment in choice of route.

Section III. MOVEMENT OF TRAINED PERSONNEL

152. Free Climbing

Much of the movement of a trained climber whose mission may be that of guide, observer, assault-team member, or security element will be without the aid or encumbrance of a rope. The terrain may not be difficult enough to require use of rope. Enemy action may require greater speed than will be possible with rope, the danger from enemy fire over-balancing the danger of unroped falls. Or, once the route for the main body has been selected and found relatively easy to travel, security elements may need to make only short scrambles to either flank. Free climbing will sacrifice the safety that results from use of the rope. In terrain so rugged that precise routes must be followed, or on which fixed ropes would be desirable for inexperienced men but are not available, the trained climbers can be posted as guides at critical points to coach or otherwise assist untrained men over steep, hazardous portions.

153. Roped (Party) Climbing

a. *Purpose.* Trained climbers tie together two or three men to the 120-foot rope when, by so doing, they increase their mutual

safety and ability on difficult rock. When one man is climbing he is belayed from above or below by another man. A two-man party is about three times as fast as a three-man party. The strongest team is made up of two parties of two.

b Procedure.

(1) *Two-man party.*

(a) One man chosen as leader because of his ability and experience will normally climb first. Both men tie in with a bowline or a bowline on a coil. The second man takes a belay position and starts the test procedure. Having found his position satisfactory, he gives the order, "Climb." The leader will then climb to a suitable belay position. He should not take long leads, particularly where the climbing is difficult. If, due to the lack of a suitable belay position, he has to take a long lead, or if the climbing is precarious, the leader should use pitons for safety. In this case the belay man adapts his position to an upward pull of the rope. The use of too many pitons will cause excessive friction on the rope. The belayer should watch the slack and inform the climber by the call "20 feet" when he estimates that there is only 20 feet of rope left. When the climber has reached a belay position, he calls "On belay" and the test procedure follows.

(b) While the second man climbs to reach the new belay position he removes any snaplinks. When the second man has reached the belay position he will change position with the belayer, the first man, or if more convenient the climbers may bypass each other and lead alternately. This will speed up the climbing. The above procedure is repeated until the objective is reached.

(2) *Three-man party.*

(a) In a three-man party each man will have a number, the leader being number 1, the middle man, number 2, and the end man, number 3. The middle man must be a good belayer and the third man will usually be the least experienced man. If, as rarely occurs, a treacherous horizontal traverse must be negotiated, the least experienced man may be tied in the middle where he can be belayed from the man above him as well as from below. The signals are the same as for a two-man party, except that the number of the man involved must be used with the signal.

- (b) For example, the middle man may give the order, "Number 1, Climb" or "Number 3, Climb," to which the proper reply is, "Number 1 Climbing" or "Number 3, Climbing." The leader climbs from the starting point to the first belay position, brings up number 2 and climbs up to a second belay position. He provides what security he can while number 2 brings up number 3. Number 2 then follows number 1, who then climbs to the third belay position. When not climbing, number 3 provides security either in the military sense or where desired as anchor man for number 2 when he is belaying. Similarly, number 1 man provides security while number 3 climbs. It must be remembered that no man climbs until so ordered by his belayer, and only one man climbs at a time.
- (3) *General rope signals.* In addition to the belay signals, certain others are useful. The call "Up rope" is used when a climber discovers excess slack in his belay rope. The call "Slack" is used when the rope is too tight for maneuver. If the climber is in trouble and wants a tight rope he calls "Tension." The call "Falling" should be used to warn the belay man if the climber believes himself about to fall. When silence is necessary or a high wind distorts vocal signals, information can be conveyed by a prearranged system of jerks on the rope.
- (4) *Descent.* Where rappelling is not used, the party will descend in an order decided upon by the leader. If route selection is the primary consideration, the leader may want to go down first; if, however, it is more important to provide belay security, he will go down last. More often than not the latter will be the case. Security for the last man down can be provided by the use of pitons.
- (5) *Simultaneous movement.* When the slope becomes gentler for a stretch, the movement of the entire party can be expedited by having all the men move at once. All men carry slack rope in neat coils which can be paid out or added to as the distance between the men varies. The rope must be kept off the ground but not taut.
- (6) *Tension climbing* (fig. 51). In tension climbing the belayer holds the leader to the rock by means of the climbing rope and pitons, the snaplinks in each piton serving as a pulley. Thus the leader is able to move up, sideways, and even up an overhang by driving succes-

sive pitons for tension, even though the natural holds are inadequate. Since, at best, tension climbing requires long experience and considerable equipment and is very exhausting to the climber, it should be used only as a last resort. The tension climber should—

- (a) Drive pitons no closer together than is necessary for safety.
- (b) Never hook a finger in a piton, but put in snaplink and climbing ropes and hold them.
- (c) Use stirrups made from sling ropes for foot holds if their use is deemed necessary.



Figure 51. Tension climbing.

- (d) Rely on the belayer's tension, keeping both hands free for the work above.
- (e) Use alternate (two-rope) tension for the most difficult pitches. This is easier if there are two belayers. However, if there is only one belayer, the following method may be used: The rope from the leader's waist passes around the belayer's waist. The second rope, fastened around the leader's hips, runs to the same side of the belayer as the first rope, and beneath his hips. The leader climbs, the belayer holding him to the cliff with tension first on one rope and then on the other, always keeping one of the ropes slack so that the leader can snap into the next higher piton.
- (f) The belayer should anticipate the leader's needs, so that few signals need be given.
- (g) When the leader needs tension to climb a pitch, the second man will also need assistance on the pitch. This is furnished by rope slings left in the pitons or, if alternate tension has been used, one of the two ropes can be tied at the top as a hand line.

Section IV. UNIT MOVEMENT

154. Basic Aids for Unit Movement

The capabilities and duties of trained mountaineers and their functions in assisting unskilled individuals and units in mountain operations have been covered in paragraph 79. The basic elements for the techniques applicable to movement are—

a. Anchors. In the setting up of all rope installations the problem of the main anchor is a great one. The ideal situation is to have some good natural object such as a firmly rooted tree or solid rock nubbin. Since this is not always available, anchors must be made or devised by artificial means. These are called "deadmen" and the leader of the installing party must decide which form is most efficient in regards to speed of installation, safety, and durability.

- (1) *Natural anchors* (fig. 52). Since these are always preferable, their use should be studied with care. If a tree is to be used, its firmness is of the greatest importance. This is especially true if the installation will be used for any length of time. Trees growing on generally rocky terrain should be treated with suspicion, since their roots normally are shallow and spread out along a relatively flat surface. If the tree has been found satisfactory, the rope may be tied to it with any of the

anchor knots. If the installation is to be used for a great length of time, the bowline or the round turn with two half-hitches is preferable to the clove and timber hitches. If rock nubbins can be used, their firmness is again of primary importance. They should be checked for cracks or any other signs of weathering that may impair their firmness to any extent. If any of these signs exist on a nubbin, its use should be avoided except in cases of absolute necessity, and then only after careful and thorough testing. Sharp edges will almost always be found on nubbins and these should be padded carefully with extra clothing, rags, branches, or grass.

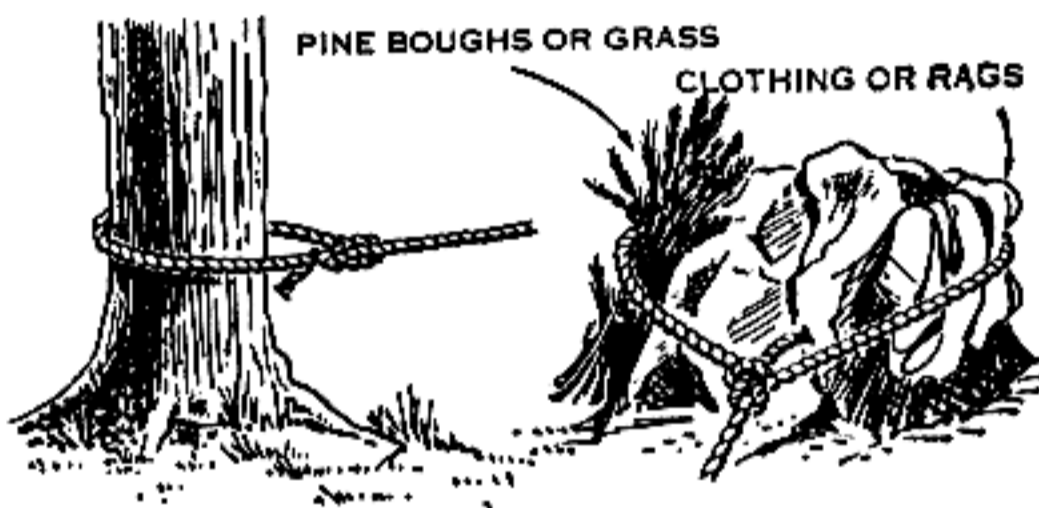


Figure 52. Natural anchors—tree—rock.

- (2) *Artificial anchors* (fig. 53). Artificial anchors can be divided into two main classes. These are anchors that are installed in earth or dirt and those that are put on rock with pitons.
- (a) Artificial anchors in earth are of two types. The single timber deadman is the safest type, although its construction requires considerable effort. A trench 6 feet long and 3 feet deep and wide enough to work in should be dug at right angles to the direction of the pull. The side of the trench towards the strain should be slanted so that it is at right angles to the pull. Another trench about a foot wide is dug so that it intersects the main trench at a 90° angle in the middle. The bottom of this trench should be parallel to the strain and should meet the bottom of the main trench. A log 5 to 6 feet long and 12 inches minimum in diameter is normally used for the deadman. The log is then put into the main trench and covered with dirt with the exception of the part adjoining the

second trench. If the dirt is not firm, stakes the same length as the depth of the trench should be placed between the deadman and the slanted side in an upright position.

- (b) The picket holdfast is easier to construct, but will not hold as much strain as the deadman. Five foot pickets, three inches in diameter, are driven into the ground a depth of three feet, one behind the other in the same direction as the pull. The head of each picket, except the last one, is secured by lashing it to the base of the next one in line. The lashings should be tight as possible and racked. The pickets should

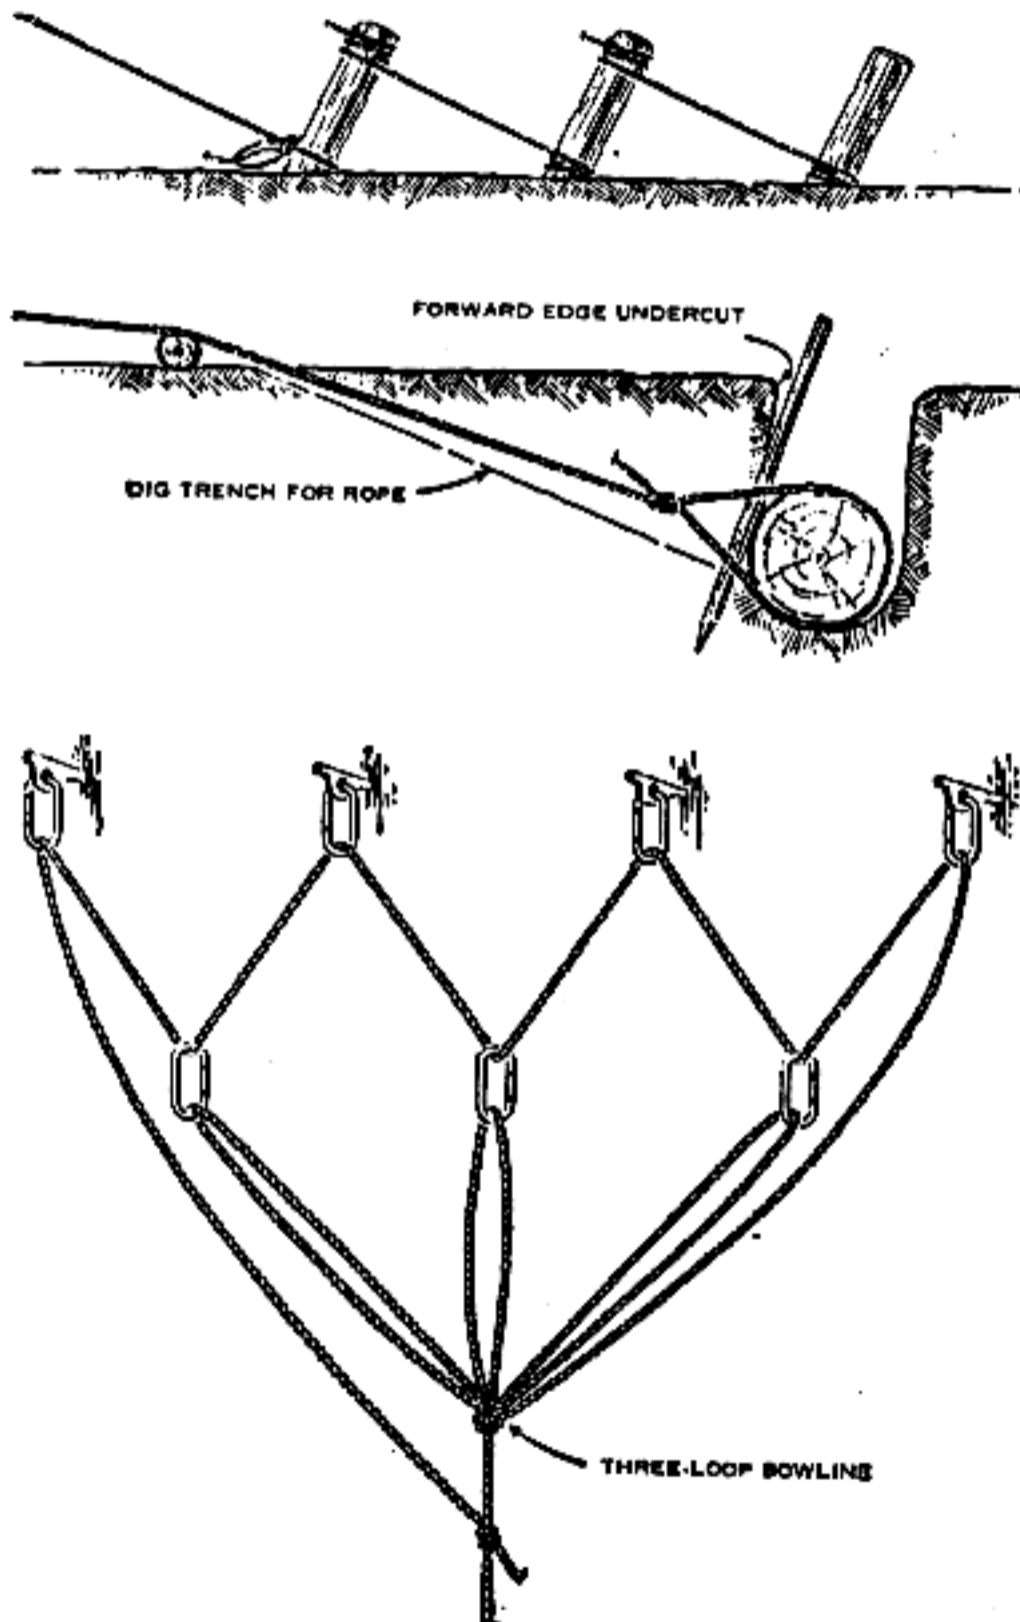


Figure 53. Artificial anchors—picket holdfast, deadman (timber in trench), pitons.

be driven at right angles to the line of pull and the distance between the pickets should be three to six feet. The anchor line is tied at the base of the picket closest to the load.

- (c) The piton deadman is the least desirable of all anchors and its use should be avoided whenever possible. At least four pitons are driven firmly and solidly into the rock. In the rope, one less bight than pitons are tied in such a manner as to leave a running end of at least 15 feet (for instance, if four pitons are used, a three-loop bowline will provide the necessary bights). Snaplinks are placed in all the pitons and bights. Starting with a piton on either extreme end, the running end is placed in the snaplinks alternately between the pitons and bights. It is then tied in back to the standing part. This deadman must be checked frequently. If one piton should pull out, the strain will be equalized between the others; at the first opportunity the deadman should be set up again.

b. *Tightening Knots.* For tightening fixed ropes, suspension traverses, or any other similar installation.

- (1) *Transport tightening knot* (fig. 41). A butterfly knot is tied in the static line far enough in front of the anchor to allow for tightening of the rope with the bight of the butterfly approximately 12 inches long. This knot should also be placed so that it acts as a safety factor for the man descending, preventing him from hitting the lower anchor. A pulley effect, for tightening the static line is obtained by inserting a snaplink into the butterfly, passing the running end around the anchor and inserting it through the snaplink. When the static line has been made sufficiently taut, a transport knot is tied snug against the snaplink. The transport knot is made by tying a slip knot secured with a half-hitch.
- (2) *Prusik tightening knot* (fig. 54). A butterfly knot is tied in the static line far enough in front of the anchor to allow for tightening of the rope, with the bight of the butterfly approximately 12 inches long. This knot should also be placed so that it acts as a safety factor for the man descending, preventing him from hitting the lower anchor. A pulley effect, for tightening the static line, is obtained by inserting a snaplink into the upper loop of the butterfly, passing the running end around the anchor and through a prusik knot in the bight of

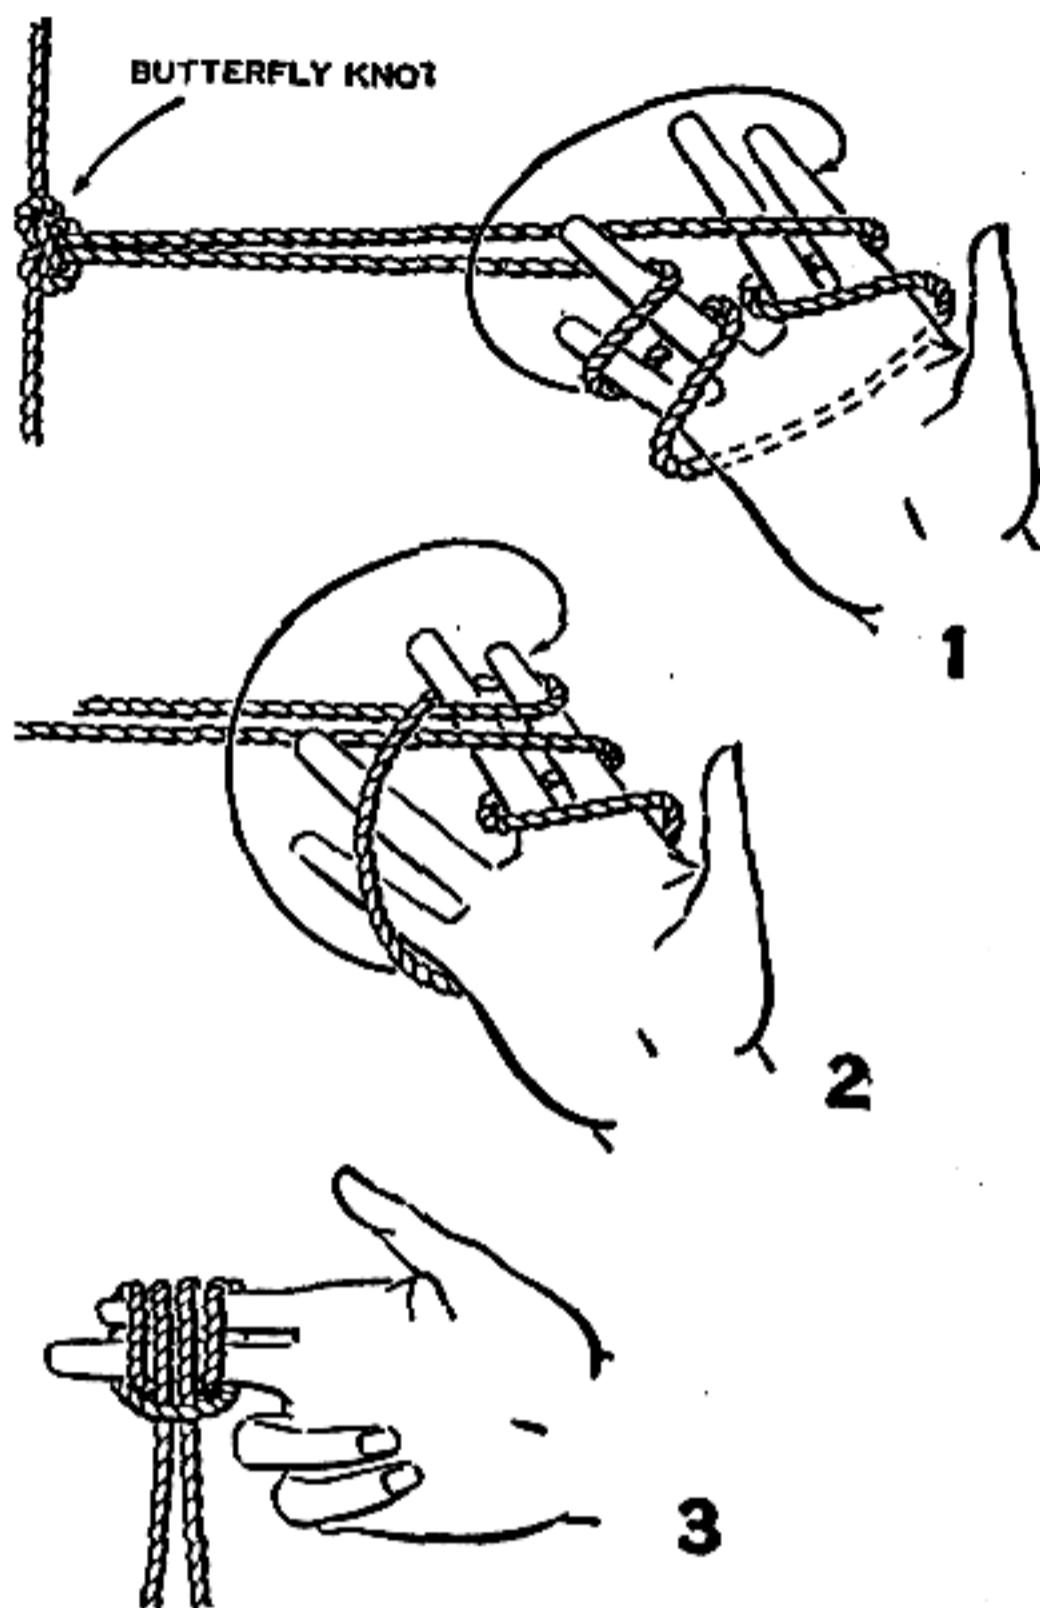


Figure 54. Prusik tightening knot.

the butterfly, and finally through the snaplink. The prusik knot, as the static line is tightening through use of mechanical advantage, acts to cinch the tightening rope. The running end is then secured with a half hitch on the rope opposite to the prusik knot (fig. 55).

c. *A-Frame* (fig. 56). An A-frame is constructed in the following manner: two sling ropes are tied together, secured to two sturdy 8- to 10-foot long poles (approximately 2 feet from the top) with a clove hitch on one pole and then wrapped horizontally around the poles six to eight times and vertically four times, and finally the ends are tied tightly with a square knot. When the bottoms of the poles are spread apart, the resulting bipod forms

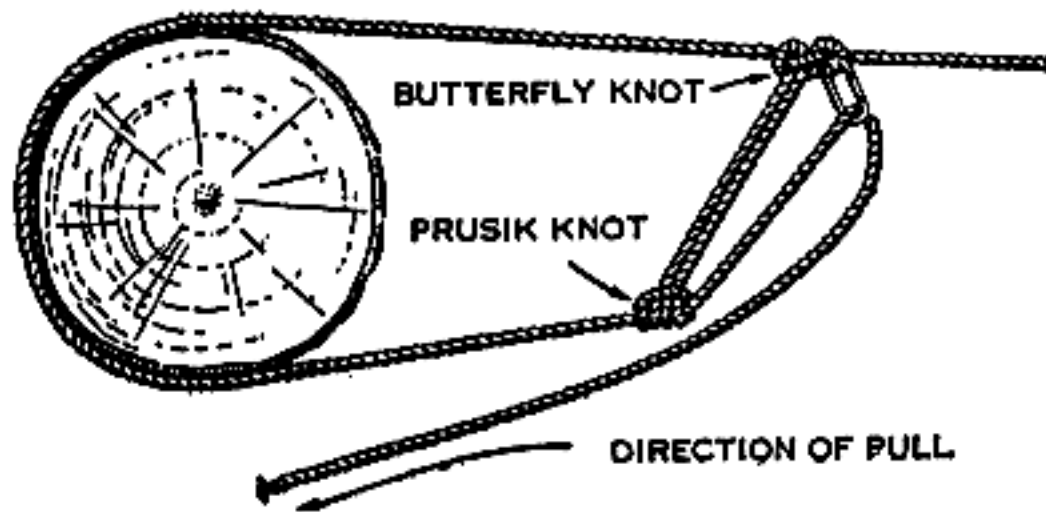


Figure 55. Use of butterfly knot and prusik knot in tightening.

the A-frame. To keep the bottom of the A-frame from spreading, the poles are braced by tying a sling rope between the two poles, securing it on each leg with a clove hitch or round turn and two half hitches.

155. Fixed Ropes

Once troops are familiar with the basic elements outlined in paragraph 154, the following fixed ropes may be installed to assist

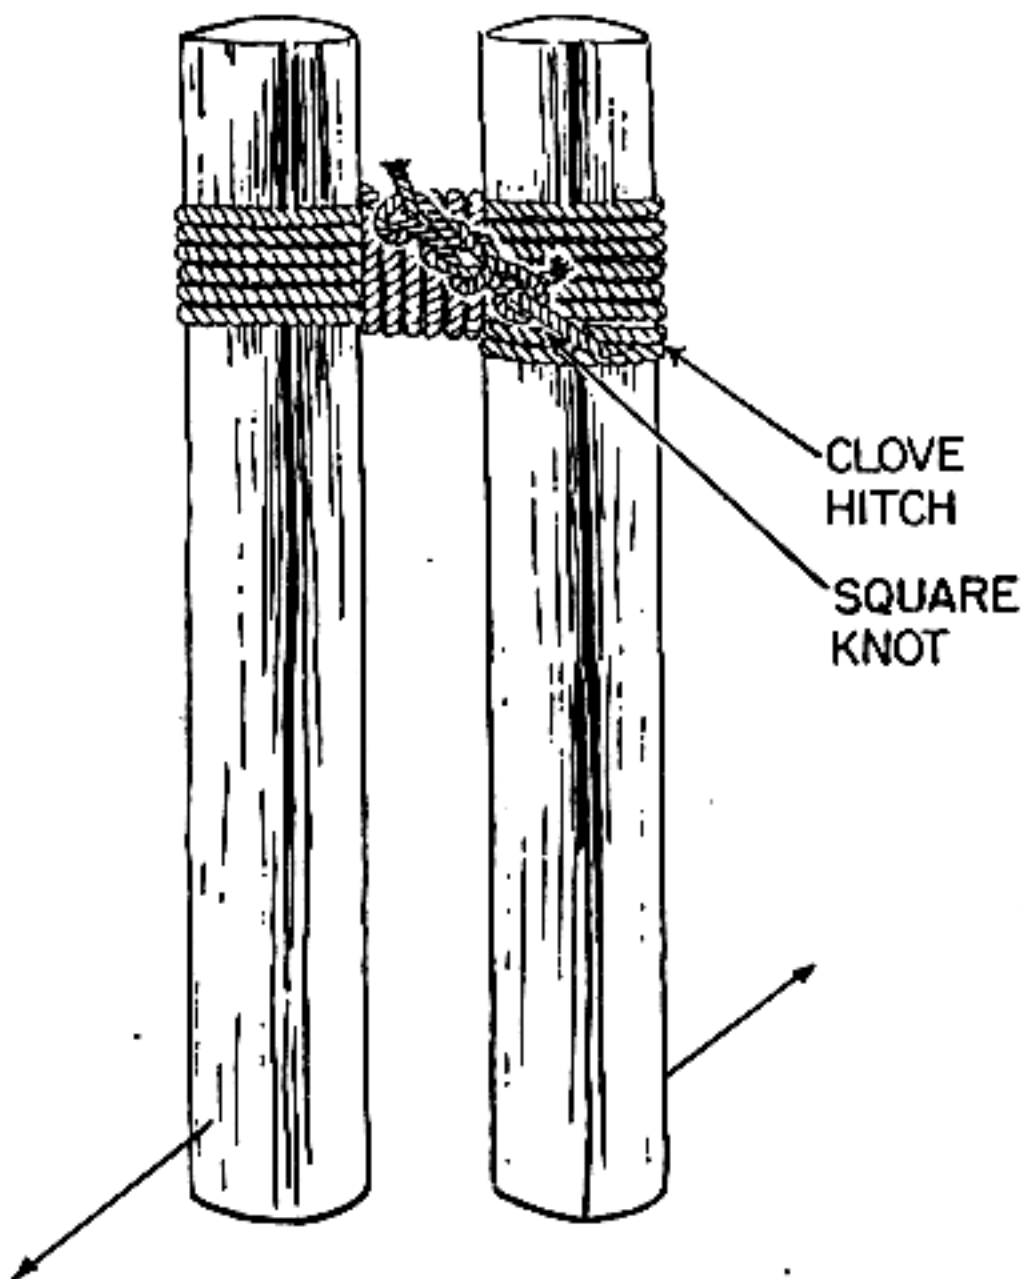


Figure 58. A-frame.

individuals and units in moving over difficult terrain with their equipment, weapons and supplies.

a. *Simple Fixed Rope* (fig. 57). Simple fixed rope is made by anchoring one end of a climbing rope and using the line thus formed to aid in climbing. The procedure is as follows: number 1 ties in, plans route, and climbs on signal from number 2 who belays, or sees that the rope runs free. At top of pitch number 1 takes up slack, either ties the rope to an anchor point, or gets into a body belay. After installation, the unskilled men then climb, using the rope for all desired aid. Only one man climbs at a time, and signals to the next man, "Climb," when he has reached the top. In difficult places overhand knots can be tied into the rope to assist the men climbing. The last man up retrieves the rope and coils it.

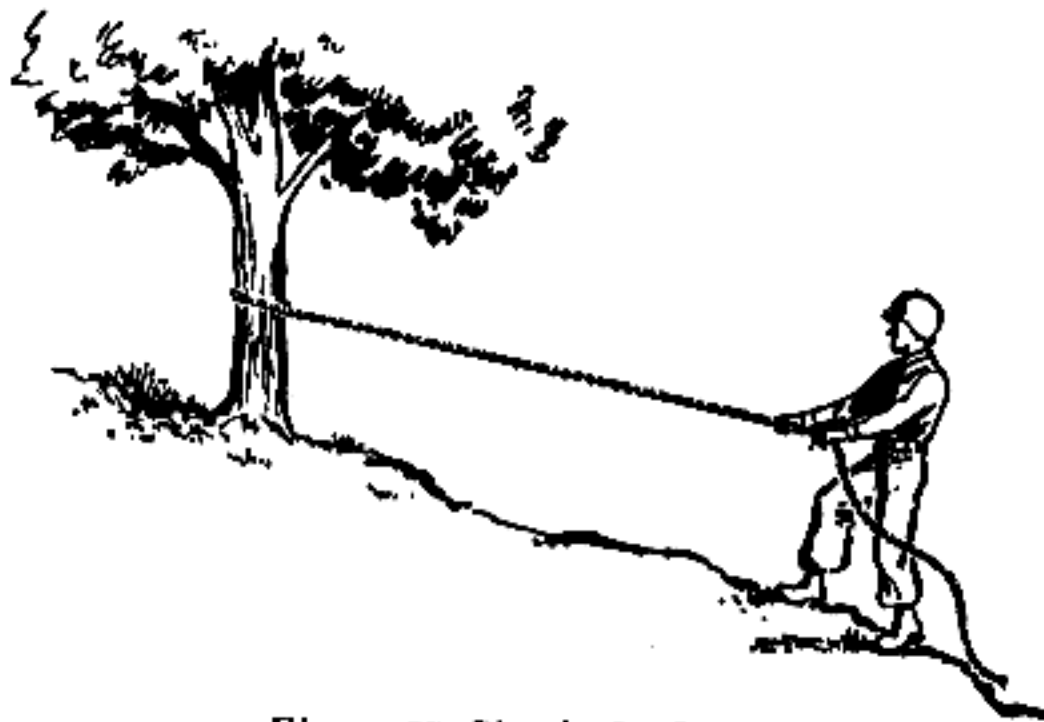


Figure 57. Simple fixed rope.

b. *Fixed Ropes* (fig. 58).

- (1) Fixed ropes are installed by trained military mountaineering teams, and are used to assist untrained men, or trained men with heavy loads, over difficult terrain safely and quickly. This type of installation differs from the simple fixed rope in that it employs many anchor points and is of a more permanent nature. To install—number 1 ties into the leading end of the rope and moves up the selected route threading the rope through snaplinks inserted in pitons he has driven, or sling ropes tied to natural anchors. Number 2 remains at the starting point, belays number 1 and sees that the rope runs freely, warning the climber when only 20 feet of rope remains. Should more rope be required, another climbing rope is tied to the first rope. When the fixed rope is installed

from above down number one man secures the rope with an anchor knot to the top anchor. If descending he then ties the fixed rope to the intermediate anchor points, in tightening the rope with prusik knots to anchored sling ropes and figure-of-eight slip knots into snaplinks while he is still belayed by number two man. As he reaches the lower anchor point the fixed rope is then finished off with a transport tightening knot.

- (2) When the fixed rope is secured from the bottom up, number 2 man anchors the rope at the bottom anchor while number 1 man secures the rope temporarily to the upper anchor. As number 2 man moves up to number 1 man he anchors the rope to the intermediate anchor points and the rope is then secured with a transport tightening knot at the upper anchor. When the installation team consists of several members, these assist the securing of the fixed rope to the intermediate anchor points while number 2 man moves up to join number 1 man. In this manner each section between anchors is tightened independently. The prusik knots and these slip knots in the snaplinks serve both to increase the tension of the rope and to make each section independent. This is a safety factor—a break in one section of the rope will not affect another section. The prusik knot or slip knot should be tied slightly above the anchor point. The transport tightening knot is used to finish off the fixed rope. Emphasis should be placed on the use of natural anchor points throughout fixed rope and care taken in its installation to obviate the necessity of troops crossing it at any point. When snaplinks are unavailable, sling ropes in pitons may be used.
- (3) Maintenance of the fixed rope is the responsibility of the team that installed it. It is also their duty to police the route, removing loose rocks, brush, and any other hindrance to the rope and troops, and to protect the rope with padding where necessary. A diagonal or traversing route should be chosen for reasons of safety. The route should not be so difficult that the troops arrive at the top too exhausted to complete their mission. Troops moving over a fixed rope must remember and use all the techniques of mountain walking and climbing. Use the fixed rope for direct aid only when necessary, but always have at least one hand on the rope. On difficult pitches employ friction footholds by leaning back and climbing hand over hand on the rope.

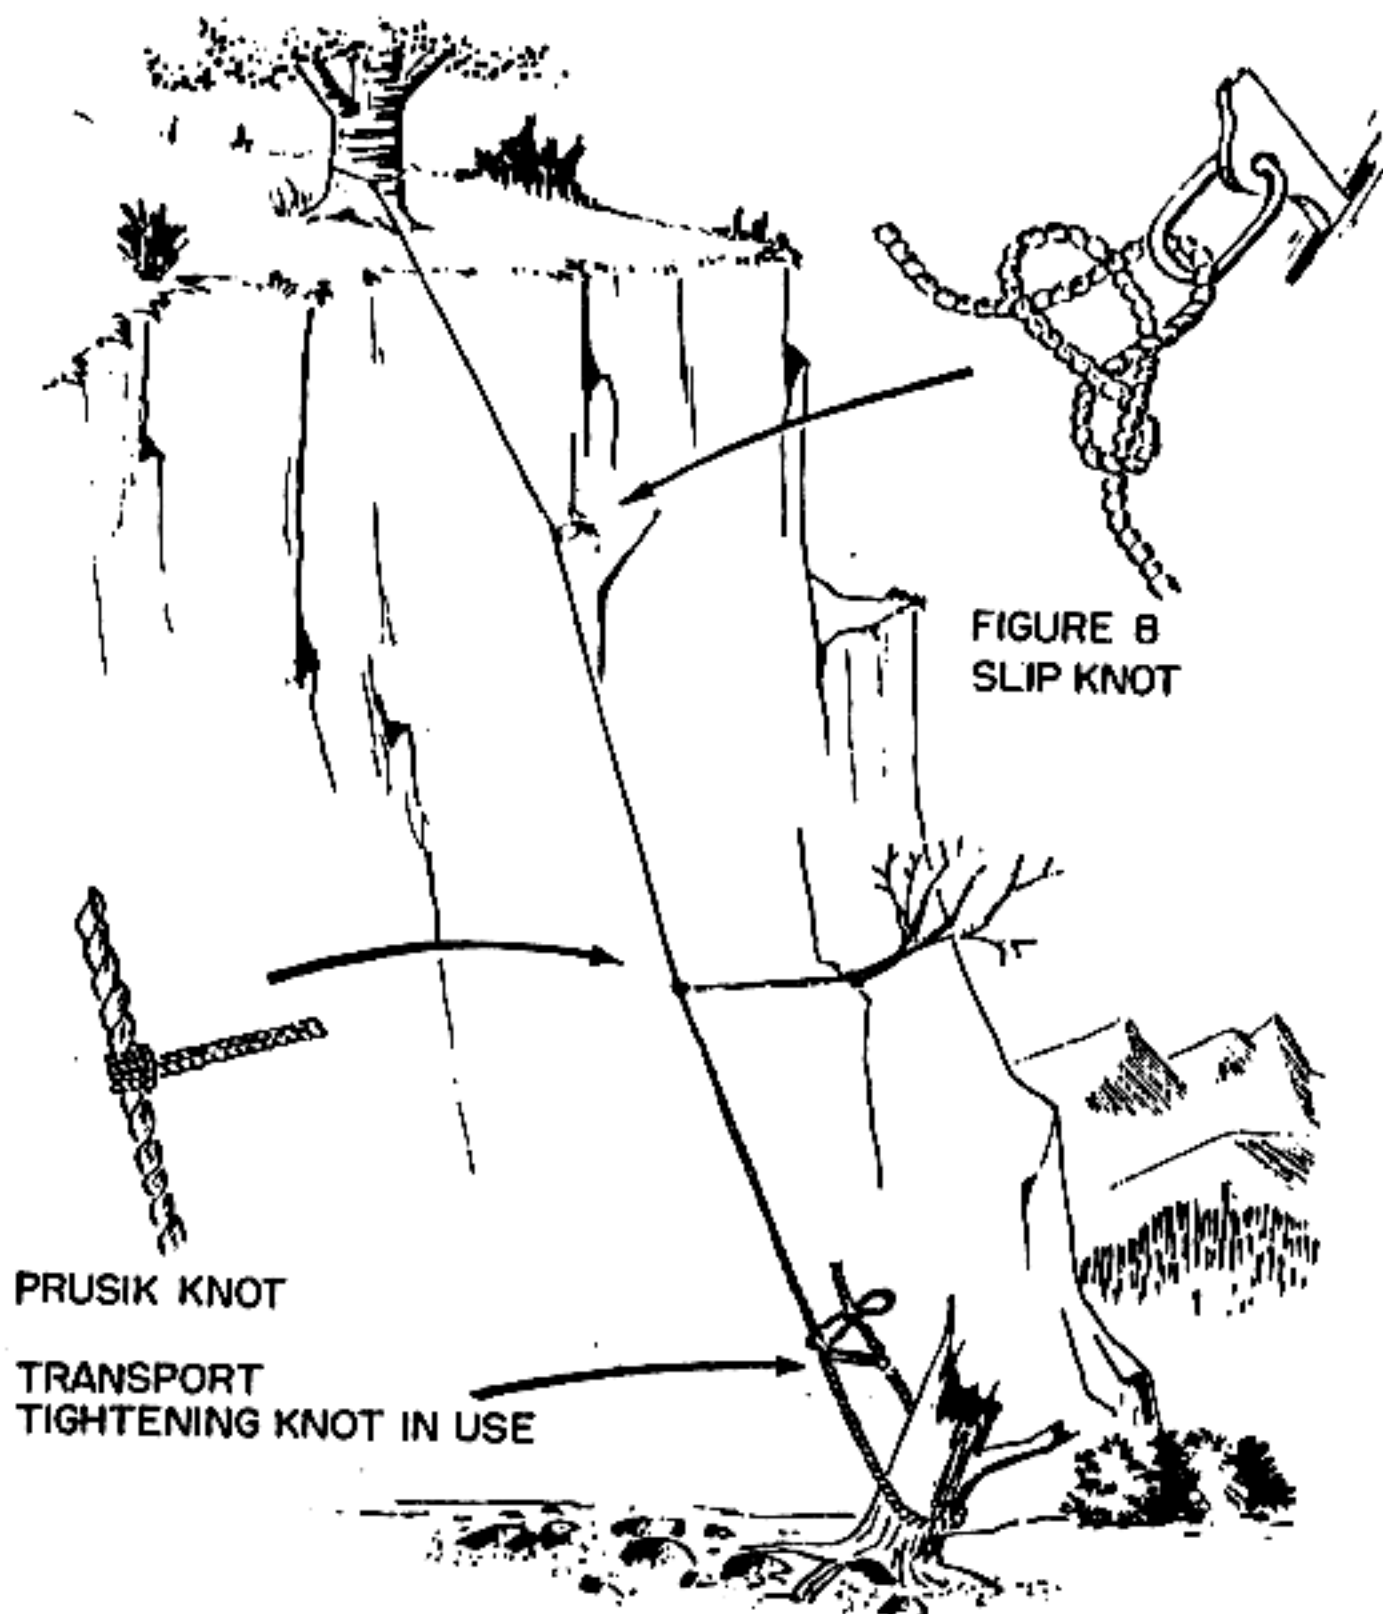


Figure 58. Fixed ropes.

156. Hauling Lines

When inexperienced men carrying heavy loads are required to climb fixed ropes, it may become necessary to set up hauling lines to move the loads. The lines may be vertical hauling lines or suspension traverse. Expedients may often serve well for all described equipment except rope.

a. Vertical Hauling Lines. A vertical hauling line is an installation for moving men or equipment up vertical, or near vertical pitches (fig. 59). It is often used in conjunction with a fixed rope where the fixed rope is used for troop movement and as a hauling line for their equipment. Generally three climbing ropes, sufficient snaplinks, and the equipment for construction of an A-frame are

necessary for this installation, but any expedients may be used that will aid the construction.

- (1) To install, select a route which has a good top anchor point, a natural loading and unloading platform at the bottom and the top, and which affords sufficient clearance for easy hauling of troops or equipment. The ideal platform at the top will allow construction of the vertical hauling line without use of an A-frame, otherwise the construction will be as follows: The anchor rope is doubled and the end with the bight placed between the top V of the A-frame so that a 1-foot long loop hangs down. A clove hitch is tied on each pole and the ropes

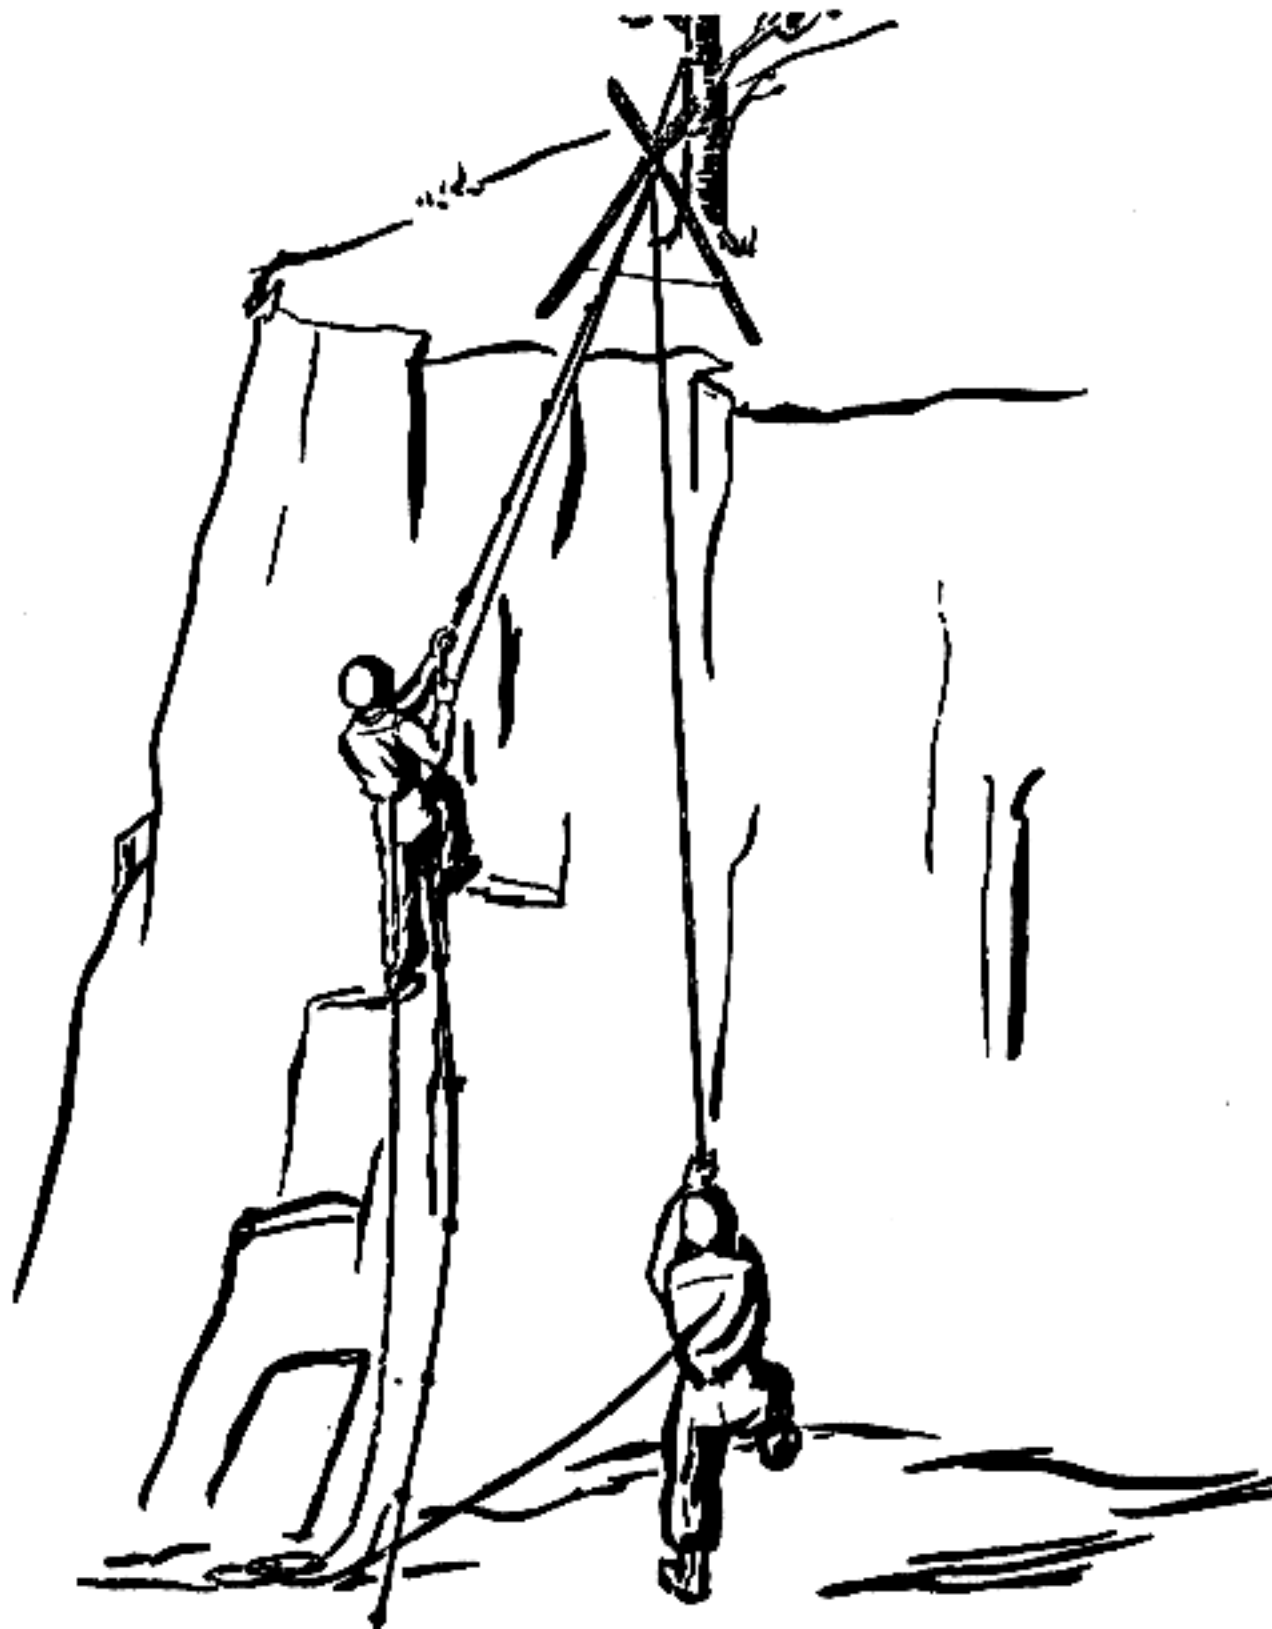


Figure 59. Vertical hauling line.

tied to same anchor. Another rope is then tied to the same or different anchor, passed through the top of the V of the A-frame, or through the A-frame, as appropriate; is then knotted with overhand knots evenly spaced and approximately 8 to 10 inches apart and then lowered. This is the rope used by the troops as a simple fixed rope as they are being hauled up the pitch. Two snaplinks (or one) are inserted in the loop hanging from the A-frame to form a pulley. A pulley rope is formed by tying the ends of a climbing rope with a square knot and half hitches, and inserting it into the snaplinks.

- (2) There are several ways of tying into the pulley rope— with a sling rope seat attached to the pulley rope; with a snaplink inserted in a butterfly knot; or with two butterfly knots tied so that when they are passed around the body and connected with a snaplink a belt is formed. If only two climbing ropes are available the anchor rope and knotted rope may be combined, and a double sling rope used for the pulley loop. If equipment only is being hauled up, it is not necessary to use the knotted rope but it may be necessary to use a belay rope from the bottom to prevent equipment from striking the rock. To move materials or troops up on one side of the hauling line, the other side is pulled from below.
- (3) Troops using the hauling line for movement must employ all applicable principles of climbing. At least one man should always be stationed at the top of the installation to aid men or retrieve loads when they reach the top. He should be anchored for safety reasons. In use, the A-frame should lean slightly over the edge of the cliff to prevent excessive wear on the ropes passing over sharp rocks.

b. Suspension Traverse. The suspension traverse is used to move men and equipment, over rivers, ravines, chasms, and up or down cliffs (fig. 60). The traverse may be made on a plane varying from the horizontal to the near vertical. To install a suspension traverse a suitable route for the traverse must be reconnoitered, with emphasis placed on the location of suitable anchor points. These must be of sufficient height to allow clearance of loads being transported over any obstacles. The static line must be carried to the upper or farther anchor by a single man or a climbing party, and secured. It is then secured to the other, usually lower, anchor and tightened by use of a tightening knot. If nylon climbing rope is to be used as a static line, it should be used double to minimize sagging and increase the safety margin. A $\frac{3}{4}$ -inch or 1-inch

manila rope should be used for installations which get heavy use. A carrying rope is now made by tying the ends of a sling rope with a square knot and half hitches, doubling the rope thus formed, and placing the square knot in the upper third. An overhand knot is tied into the loop above the square knot and a second overhand knot is then tied slightly below it. The belay rope is tied to the center of the three loops of the carrying rope and then a snaplink is inserted into the upper small loop and into the static line (fig. 61). To secure either the loads or the men to the static line this carrying rope is merely passed through the seat or lashings and the larger loop snapped into the snaplink or the static line. When the man or load has been hooked onto the static line, a belayer lowers the load by using a body belay, a belay through a snaplink, or around a tree, and stops him gradually as he nears the bottom. If it is a steep traverse, and the descent is rapid, protective padding must be used by the belayer to reduce the friction on the body. If the load is being raised or the traverse is horizontal, it will be necessary to have a belay rope from both anchor points and to pull the load up or across and to retrieve the carrying rope.

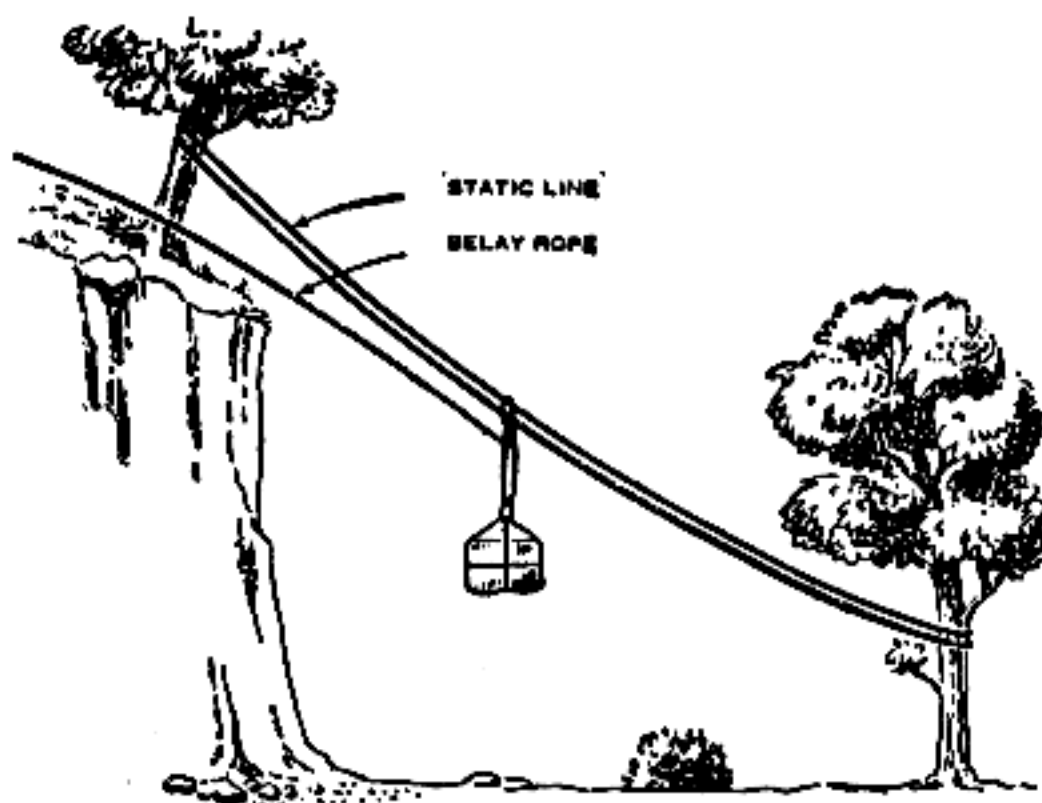


Figure 60. Suspension traverse.

157. Mountain Stream Crossings

a. The techniques of the trained climber may be used in crossing mountain streams. Sudden rains or thaws can change placid streams into roaring torrents. These may have to be crossed without special equipment or the assistance of specialized troops. All mountain soldiers should be trained in crossing mountain streams.

b. The best time for crossing is in the early morning when the

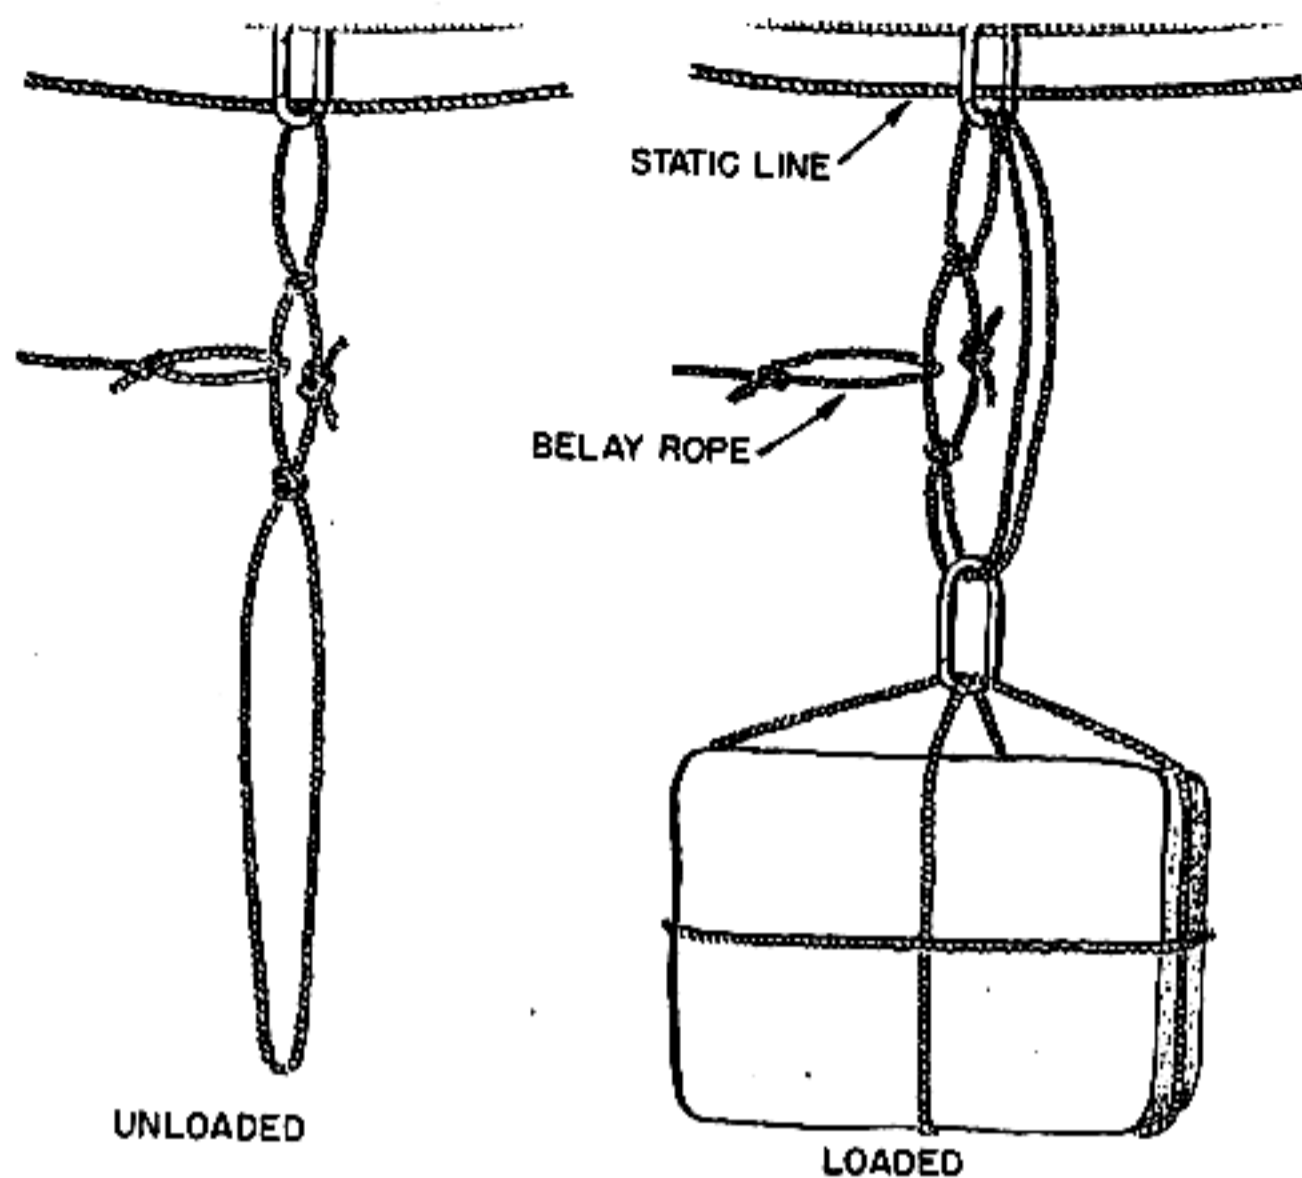


Figure 61. Carrying rope for use on traverse.

water is low. As glaciers, snow, or ice melt during the day, the rivers rise, reaching their maximum height between midafternoon and late evening, depending on the distance from the source.

c. Prior reconnaissance of possible crossings must be made before the arrival of the main body, so that the best place for the crossing may be selected. A crossing point should be chosen, if possible at the widest point of the stream, or where it branches into several smaller streams. Cover should be available on the banks. Wherever possible, select a point where there are few, if any, large stones in the river bed. Water is turbulent over large stones, while it flows smoothly over small stones. Large stones increase the difficulty of maintaining an easy footing. The place for crossing should be clearly marked on both banks.

d. Shoes should be worn to prevent foot injuries, but socks should be removed and kept dry.

e. A shallow stream with a moderate current can be forded without the use of ropes or logs. Men should cross in a line four abreast without linking the arms or affording each other support. The strongest and most able men are placed at the ends of the line for additional safety. The river should be crossed at an angle,

upstream. The feet should be wide apart, and kept flat with the bed of the stream, and should always be set down on the upper side of any obstruction in the stream bed. The legs should be dragged through the water, not lifted, so that the force of the current will not throw the individual off balance and drag him under.

f. Swifter and deeper rivers may be crossed by groups of men assisting each other.

- (1) To cross using the ring method, a squad of men form in a ring, locking hands with each other and placing the arms behind their backs. The body is bent well forward.
- (2) In the chain crossing, a squad of men form in line, lock arms with each other, and then cross their own arms and lock their hands in front to give added support. The line then moves across diagonally downstream.
- (3) Use of bridge and stream crossing expedients are covered in paragraph 113.

g. Wherever possible, and when the degree of experience permits, torrential streams should be forded individually in order to effect a speedier crossing. Only experienced soldiers should attempt an individual crossing of a strong, deep current. A balance pole may be used and worked ahead of the individual, always on the upstream side. The weight of the body must be evenly distributed between the pole and the feet to maintain the necessary two points of support. The pole is first moved forward and planted, and the feet are then moved ahead.

h. (1) Rapids, or a fast-moving deep stream which is filled with large boulders, may be crossed by jumping from stone to stone. Logs or trees may be felled from the banks to facilitate the movement. As a safety measure, the rope should be used during the crossing. Individuals tie themselves in and are belayed by the security man who must pay the rope out gradually in order that the movements of the men will not be impeded. The bowline knot should be used for the tie-in. The hip belay may be used by the security man.

(2) When jumping from boulder to boulder, the soldier should jump from a crouching position pushing off simultaneously with both feet, and landing with both feet flat on the rock.

(3) The first man to cross rigs a rock belay and helps to insure the safety of those following.

i. (1) If the current of a river is rapid and deep, and yet can be crossed by using a rope support, a hand line is strung

from bank to bank. The most experienced individual is tied into a rope and belayed across the stream. The rope is then tied into whatever supports can be found on each bank, and the unit crosses in column.

- (2) When crossing it is imperative that each individual stay on the downstream side of the rope, as the current has a tendency to pull one under the rope.
- (3) If equipment is being carried, it is advisable to use a sling rope around the individual's waist and attached to the handline with a snaplink.
- (4) For carrying an injured man across, a rope seat may be made and attached to the individual who is to carry the injured man. The injured man is then hoisted to the back of the carrier and fitted into the rope seat. For additional security, a snaplink attachment is made to the hand line from a rope around the carrier's waist. The carrier then makes the crossing as prescribed for the other individuals.
- (5) Rescue posts are set up at various points downriver on both banks. These posts should be manned with the best men, equipped with ropes and poles. If the current sweeps a man off his feet and downstream, he is then rescued at the rescue posts.
- (6) The last man to cross removes the rope from its belay point, ties himself in, and is belayed across the river from the opposite bank.

j. Where powerful torrents of water between sheer cliffs are encountered, a suspension traverse should be used.

- (1) The individual selected to take the rope across must be the best trained, most experienced man in the unit. He ties himself in securely. The man crossing uses a balance pole as described in *g* above. The stronger the current, the greater is the angle at which the pole must be placed in the water.
- (2) The crossing is assisted by the belayer who pays out the rope as the crossing man advances. If there are large boulders protruding from the river and lying in or near the path of the man crossing, he should utilize the rocks by crossing so that the rope falls against the upstream sides of the stones, thus affording himself an intermediate belay.
- (3) As soon as the crossing man arrives on the opposite bank, he ties the rope to a solid anchor.

- (4) Once the rope is tied in, it is so tightened from bank to bank that it is several feet above the water.
- (5) Individual rope seats such as are used in rappelling with a snaplink may be made up for each man. The snaplink in front of the rope seat is then snapped into the crossing rope and the individual swings out, pulling himself across. Only one man should cross at a time.

CHAPTER 5

SNOW AND GLACIERS

Section I. GENERAL

158. Reference

For a detailed description of operations in snow and extreme cold, see FM 31-71.

159. General Characteristics

a. Mountainous regions in cold and temperate zones are characterized during winter by the following:

- (1) A great amount of snow, which remains during most of the year in the high regions.
- (2) Extreme cold, often reaching 40° F. or more below zero in some areas, and severe snow storms which impose great hardship on the troops.
- (3) Snow starts to fall at varying times in the autumn according to the geographical location, altitude, and exposure. The snow cover differs with the altitude and may also differ greatly from year to year. A deep snow cover greatly changes the problem of living in the mountains, especially by increasing the difficulties of communication, transportation, and sanitation. Even a small amount of snow restricts the movement of men and vehicles. The deeper the snow, the more it hampers and canalizes the movement of columns. If it is over a foot deep, movement by foot troops must be accomplished with the aid of skis and snowshoes. Wheeled vehicles will not be able to proceed any farther or any faster than the snow removal equipment will permit. The emplacement of artillery becomes an extremely slow and laborious process. In some cases, it may be necessary to transport the artillery on sleds or specially constructed runners. Heavy artillery must use track-laying vehicles as prime movers.
- (4) A great many slopes which are easy to negotiate in the summer become difficult and even dangerous to climb in the winter because of frozen and snow-covered ground and the risk of avalanches. When winds reach a great

velocity, traffic becomes almost impossible. Nevertheless, a great deal can be done to improve traffic conditions. If there is sufficient manpower and mechanical equipment, the principal routes can be kept clear. Snow removal is usually a continuous process because of drifting snow and frequent snowfalls.

b. Snow conditions are met in high mountains at all seasons of the year.

160. Effect of Special Training and Equipment

Small units of mountain troops, specially equipped, can carry out operations in the mountains during the winter, and because of their special training are aided, rather than retarded, by the snow. The importance and effectiveness of winter operations has taken on an added significance since the adoption of special clothing, skis, snowshoes, and track-laying snow vehicles. Such vehicles can be used to haul personnel, supplies, equipment, and artillery and they are useful for packing the snow. Such specialized equipment makes large scale winter operations in mountains entirely practicable.

Section II. CLASSIFICATION OF SNOW

161. Classification of Snow

a. In the preceding paragraphs the terms "snow" and "ice" have been used in a general sense to describe snow or ice forms. In order to clarify the danger inherent in snow and ice, it is necessary to outline the forms that snow assumes in its transition to glacier ice. Some forms of snow are of considerable benefit to the mountain soldier, others are a source of grave danger. For classification of snow see table II.

b. Snow is classified as powder snow and compact snow. Powder snow is snow in its early stages and is classified as new snow, settling snow, or settled snow. Compact snow is snow which has passed beyond the stage of settled snow.

c. New snow is snow that maintains individuality of flakes immediately following its fall. If new snow is dry, it is feathery; if damp, it quickly consolidates into settling, or settled snow.

d. In areas of extreme cold and at high altitudes, new snow not uncommonly comprises two forms—sand snow and wild snow.

- (1) Sand snow falls at extremely low temperatures. As its name implies, it is sandy. Skis, sleds, and toboggans slide over it with considerable difficulty.

(2) Wild snow is very dry new snow which falls during complete calms and low temperatures. It is extremely light and feathery and very unstable.

e. Settling snow is powder snow consisting of flakes which have begun to lose their individuality.

f. Settled snow is powdered or wet snow in which the flakes have interlocked and united. This is the settled powder to which skiers refer.

g. New firn snow is compact, granular snow that is composed of closely associated grains instead of individual flakes. Heat-softened new firn snow is referred to by skiers as spring or corn snow.

h. Advanced firn snow or neve consists of closely associated grains of ice, separated by air spaces.

i. Glacier ice is composed of crystals of advanced firn snow cemented by a film of ice. There are no air spaces between the grains and any air spaces present are within the grains themselves.

162. Snow Formations


The forms of snow described in paragraph 161 are subject to various modification during their transition from dry new snow to glacier ice. Temperature, humidity, and wind are important modifying factors in this transition. The following phenomena are important to the mountain soldier:

a. Sun crust is any snow the superficial layer of which has been melted by heat and subsequently refrozen. A layer of snow that is sun crusted and weathered throughout its thickness becomes firn snow. Sun crust commonly overlies powder snow.

b. Wind crust or wind-packed snow is usually found on windward slopes and is anchored firmly to the underlying snow. A moist wind blowing over snow slopes causes the surface snow to become compacted. Depositing or drifting snow is not involved. Inasmuch as the snow forming wind-packed snow has not been transported, the crystals are not greatly affected by abrasion. Consequently, they reflect much light. Wind crust is generally safe.

c. A wind slab is formed from snow transported and deposited by winds. While the slabs themselves are well compacted, they are loosely anchored to the underlying surface; in fact, all wind slabs have an air space between the slab and the underlying snow. Having been transported by wind, the component grains are rounded and do not reflect the light. For this reason the surface of a wind slab has a dull, chalky appearance. Wind slabs are extremely dangerous.

Table II. Classification of Snow

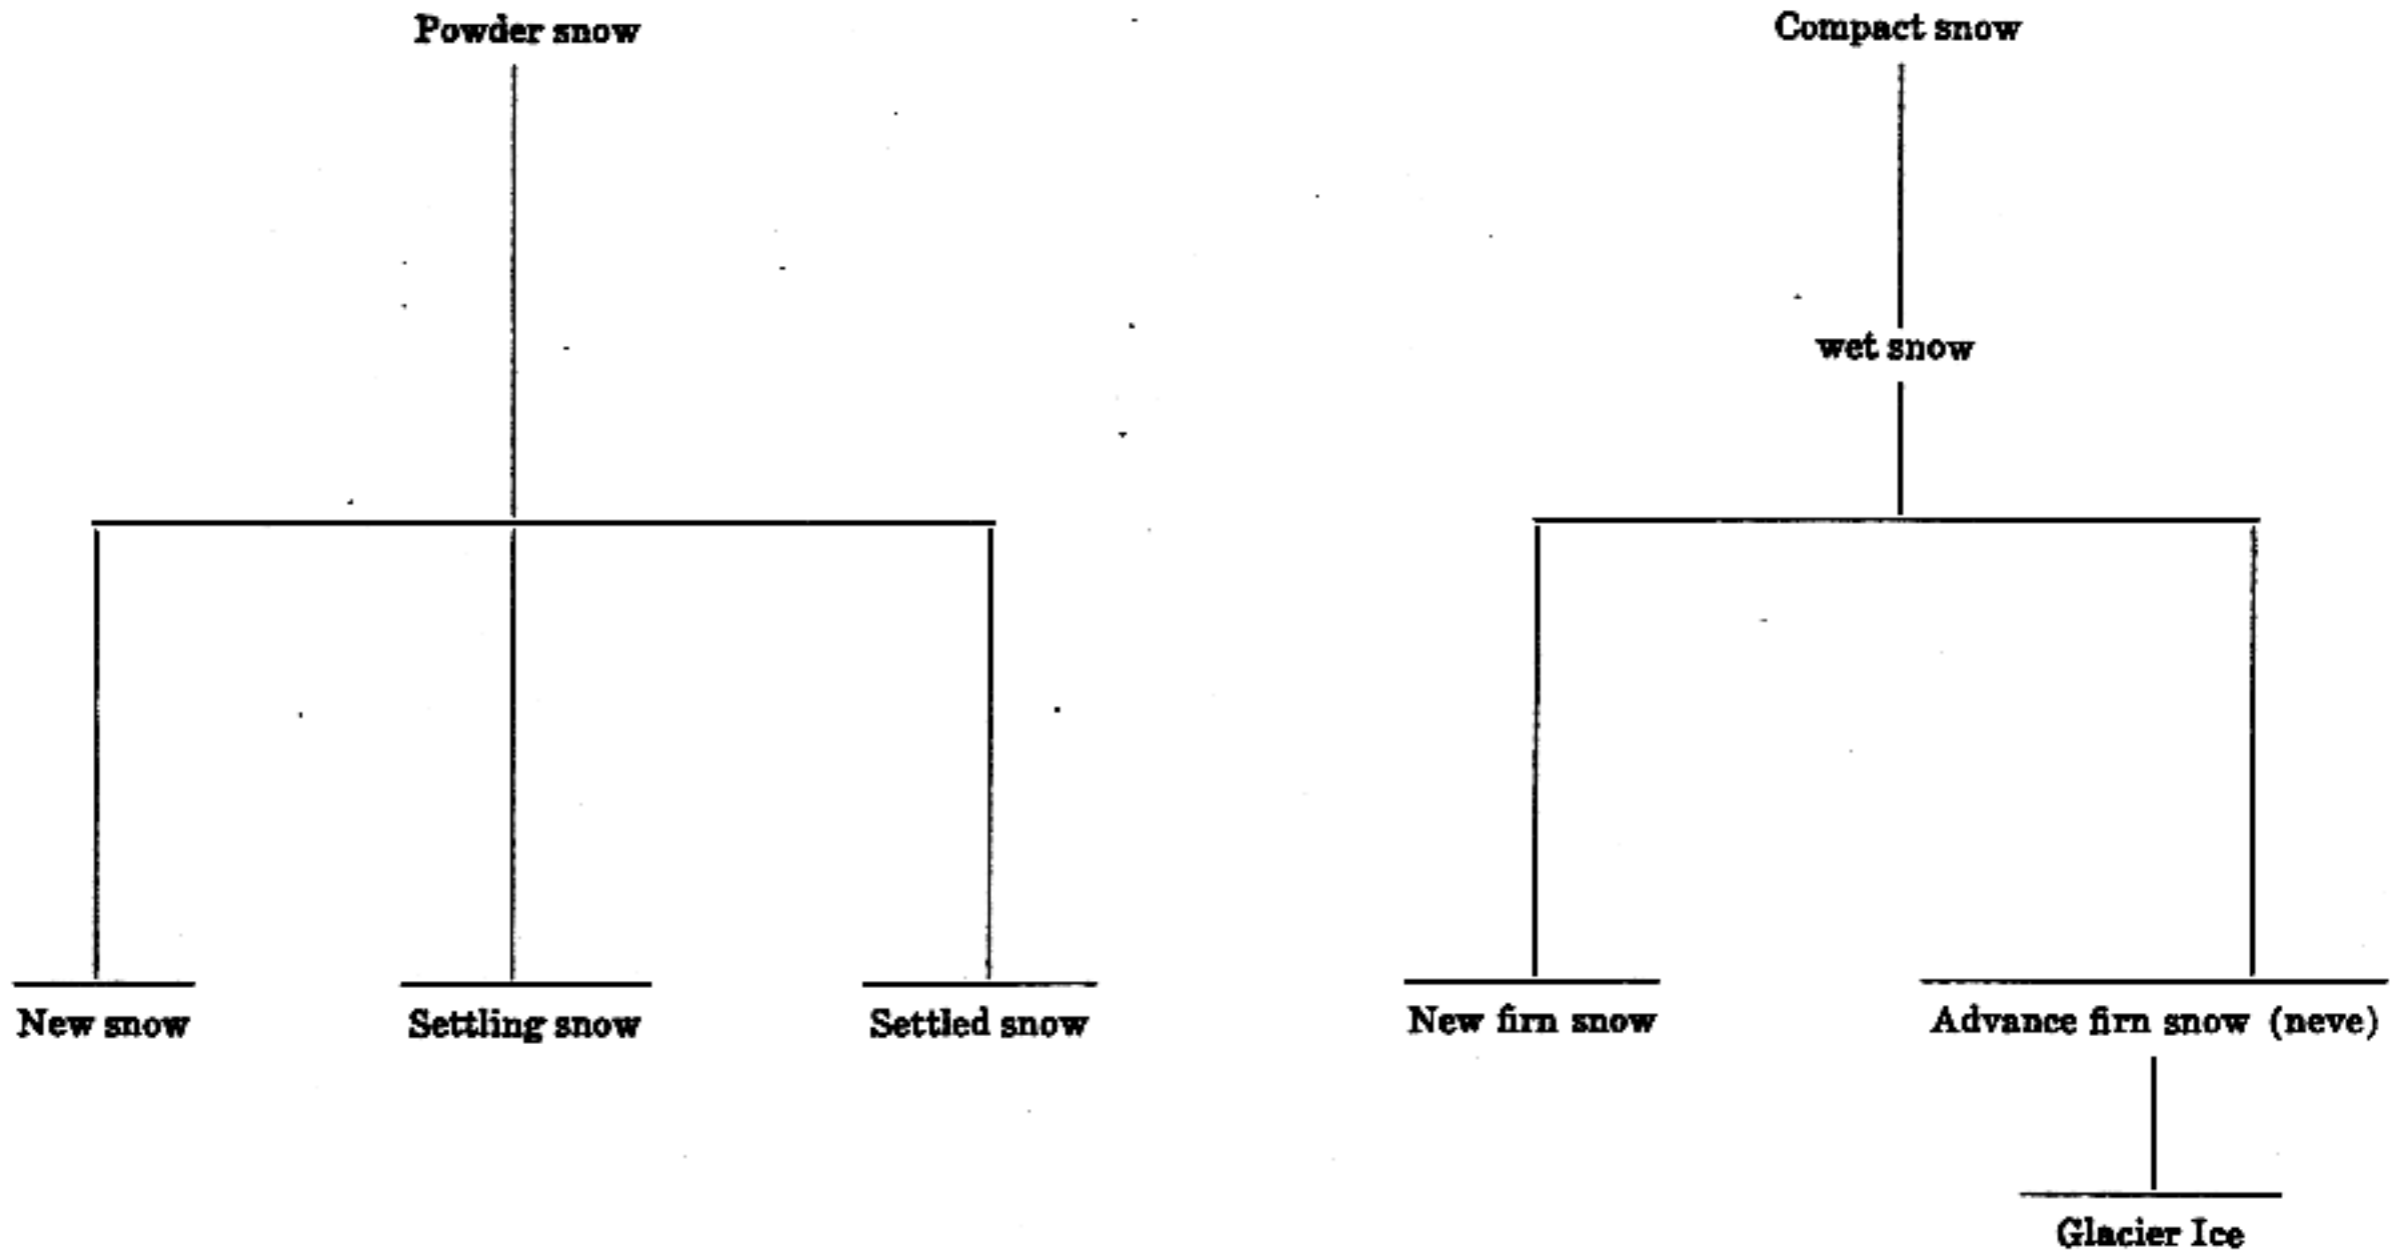

Section III. AVALANCHES

163. General

The danger of avalanches must be carefully considered when military operations are being conducted in the snow covered mountains. Avalanches occur when the weight and the pressure of the snow overcomes the power of resistance and friction of the under layer, or the tension in the snow cover is disturbed. Several causes of avalanche "triggering" are explained in subsequent paragraphs. The danger of avalanches has become even greater in modern warfare due to vibrating effects causing severe snow and rock slides miles away from the point of a nuclear detonation.

164. Basic Causes of Avalanches

a. General. Fundamentally there are only two causes of avalanches—terrain and climate; in everyday terms—plenty of snow and steep slopes for it to slide on. These two essentials, acting together, can produce an avalanche without any other assistance.

b. Terrain.

- (1) Ground surface conditions have considerable effect beyond the snow in contact. A broken, serrated, or boulder-strewn surface provides a good anchorage for the snow-pack as a whole. Slides breaking off at ground level are unlikely. Smooth, even slopes of bare earth, solid rock, or shale favor the massive ground-level avalanches, typical of the high alpine zone.
- (2) The contours of a mountain influence the avalanche; terraces, talus, basins, and outcrops are effective barriers. They either divert the moving snow or give it room to spread out and lose its momentum. Gullies collect and channelize the descending snow thus making favorable slidepaths (fig. 62) which must be carefully avoided. Ridges lying parallel to the slidepath, on the other hand, are relatively secure. The convex slope is more likely to avalanche because the snow layers settling upon it are placed under tension. Avalanches usually fracture at the sharpest point on the curve, get up to full speed instantly, and pulverize rapidly. The steepest part of a convex slope is generally near the bottom, leading to a sudden transition and poor anchorage at the toe of the snow layer. On a concave surface, snow is under compression. The steepest part of the slope is generally near the top; the transition is more gradual and the anchorage at the toe is better than for a convex slope. The dimensions of the slope (length and width), are other factors that deter-

mine the size of the snow slide and possible destruction caused.



Figure 62. Dangerous slidepath. Overhanging cornice on the sky line.

- (3) All of the terrain features mentioned above are less important than grade. The higher the slope angle, the more likely it is to slide regardless of any other condition. The minimum angle favorable to avalanches is 25° . Slopes from 25° to 35° may avalanche, especially if stimulated by cutting action of the skier or some other outside disturbance. The critical zone lies above 35° . From this angle to the point where snow can no longer cling except by windpacking, slopes are apt to slide in some fashion with every storm.

c. Vegetation. Vegetation of any kind except grass has a restraining effect on avalanche. However in general, the existence

of heavy forest cover is an indication that slides in that location are rare or of minor importance. It is a mistake, however, to consider all forested areas as safe. Scattered timber is no particular deterrent. Slopes where the timber has been destroyed by fire offer good facilities for snow slides.

d. Exposure. Slopes facing the sun favor the avalanches produced by thawing. Loose snow avalanches are more common on the slopes opposite the sun. Cornices habitually form along ridges and crests lying at right angles to the prevailing wind. Lee slopes are the most probable locations for overloads of wind-driven snow and the formation of slab. On the other hand, snow is transported from the wind beaten slopes and that which remains is thoroughly packed and stabilized.

e. Climate and Weather.

- (1) In addition to the terrain factors climate and weather are the other basic ingredients for the avalanche phenomenon.
- (2) High rate of snowfall and storms which deposit up to three feet of new snow in one continuous downpour, are not uncommon.
- (3) Temperature fluctuates widely and rapidly in the mountains. Prolonged spells of extremely low temperatures occur and there are occasional intrusions of warm air masses, usually in connection with a storm. Rainfall may occur in the coastal zones and create an avalanche condition. The temperature greatly affects the cohesion of snow; a rise in temperature weakens the bonds, while a drop in temperature retards settlement of the snow mass and increases the brittleness and tension of a slab formation.
- (4) Wind action during the storms in the mountains is generally strong and its influence on snow is the most important of all the contributory factors. It transports snow from one exposure to another during storms and fair weather, thus promoting overloads on certain slopes. It also modifies the size and shape of snow particles.

165. Types of Avalanches

a. Classification. The avalanches may be classified in accordance with the type of snow involved, the manner of release, or the size. For practical purposes the classification according to the type of snow involved, is normally used, and all slides divided into the following three general groups:

- (1) Loose snow avalanches.

- (2) Packed snow avalanches.
- (3) Combination avalanches.

b. Loose Snow Avalanches.

- (1) *Characteristics.* An avalanche of loose snow always starts on the surface from a point or a narrow sector. From the starting point it grows fanwise, expanding in width and depth. The speed and nature of its development depend on whether the snow is dry, damp, or wet.
- (2) *Dry loose snow avalanches.* These are composed of loose snow, possibly drifted but not windpacked. They often start at a point, and travel at high speed on a gradually widening path, increasing in size as they descend (figs. 63 and 64; note the enormous cloud of snow dust involved). A dry loose snow avalanche is always shallow at the start and depends for volume on the snow it can pick up during its run. Thus, a dry snow avalanche of dangerous size can only occur on a long slidepath, or from a large accumulation zone with funnels into a constricted outrun. Occasionally heavy snowfall at low temperatures produces the phenomenon of the "Wild Snow" avalanche—formless masses pouring down the mountain-side. They are actually avalanches of air and snow mixed. Windblast is a side effect of very large, high speed avalanches, powerful enough to damage structure and endanger life outside the actual avalanche path.

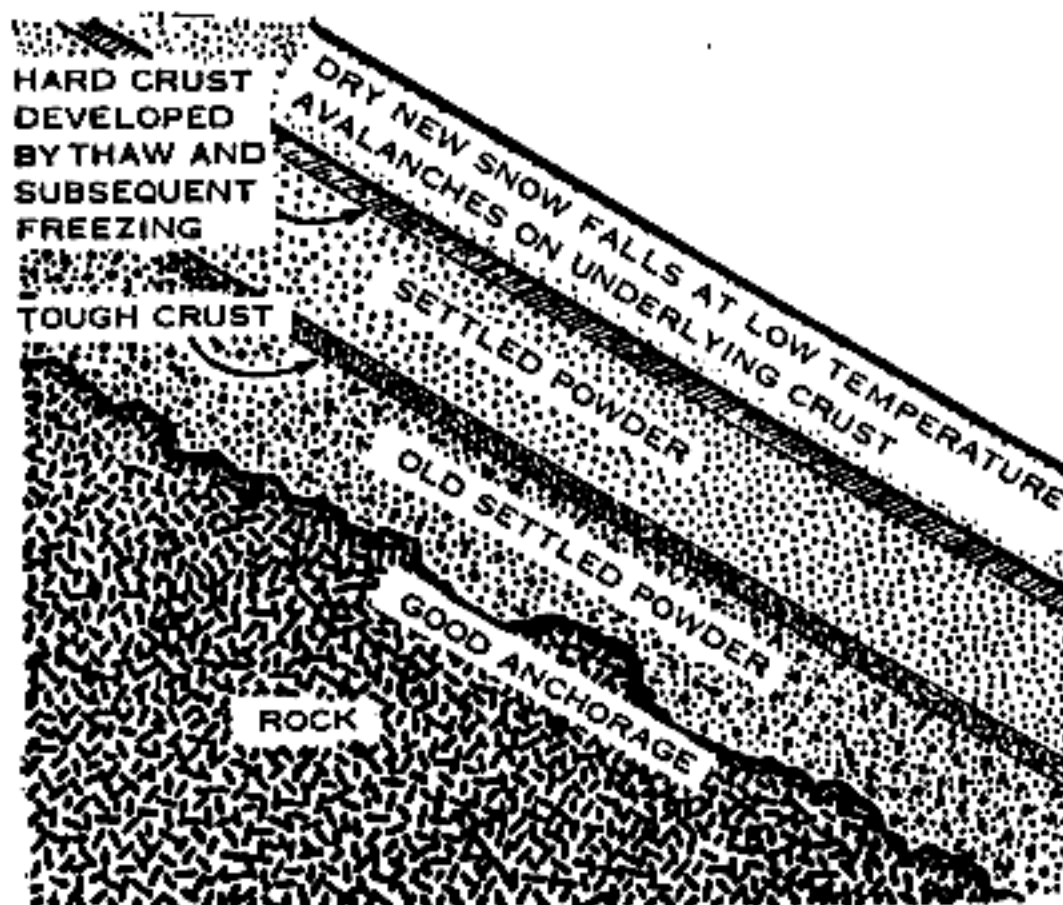


Figure 63. Dry snow avalanche—composition of snow layers.



First phase

Figure 64. Dry, loose snow avalanche.

It is characteristic that the hazard from loose snow avalanches is soon over one way or the other.

(3) *Damp and wet snow avalanches.*

(a) These resemble those of dry snow with the same arrowhead point of origin, gradually becoming wider. Their mass is many times greater than that of a dry avalanche and they are therefore much more destructive. Being heavier and stickier, however, they develop more friction and therefore travel at a slower pace. An alert and experienced skier can generally outrun them and the principal hazard is to fixed installations. The comparatively low speed causes them to stop rather suddenly when they lose momentum and to pile up in towering masses of boulders. This is in contrast to the dry slide which tends to spread out like the splash of a wave.

(b) Damp and wet slides (figs. 65 and 66) solidify the moment they are released from the pressure of motion adding to the difficulty of rescue or clearing opera-



Second phase

Figure 64—Continued.

tions. Wet slides have a distinctive characteristic of channeling. The moving snow constructs its own banks and flows between them like a river of slush, often in unexpected directions. The damp sunslides of mid-winter are generally shallow. But the wet avalanches of spring, caused by deep thawing either from rain or prolonged temperatures above freezing, often involve enormous masses of snow and debris and have incalculable destructive power.

c. Packed Snow Avalanches.

(1) *Windslab.*

- (a) The windpacked snow, called windslab, snowslab, or slab when sliding, is unquestionably the worst killer of all and equal to the wet spring avalanche as a destroyer of property. Slab may be hard or soft. Hard slab is usually the result of wind action on snow picked up from the surface. Soft slab is usually the result of wind action on falling snow. The windslab avalanche (fig. 67 (note the light snow-dust cloud in comparison

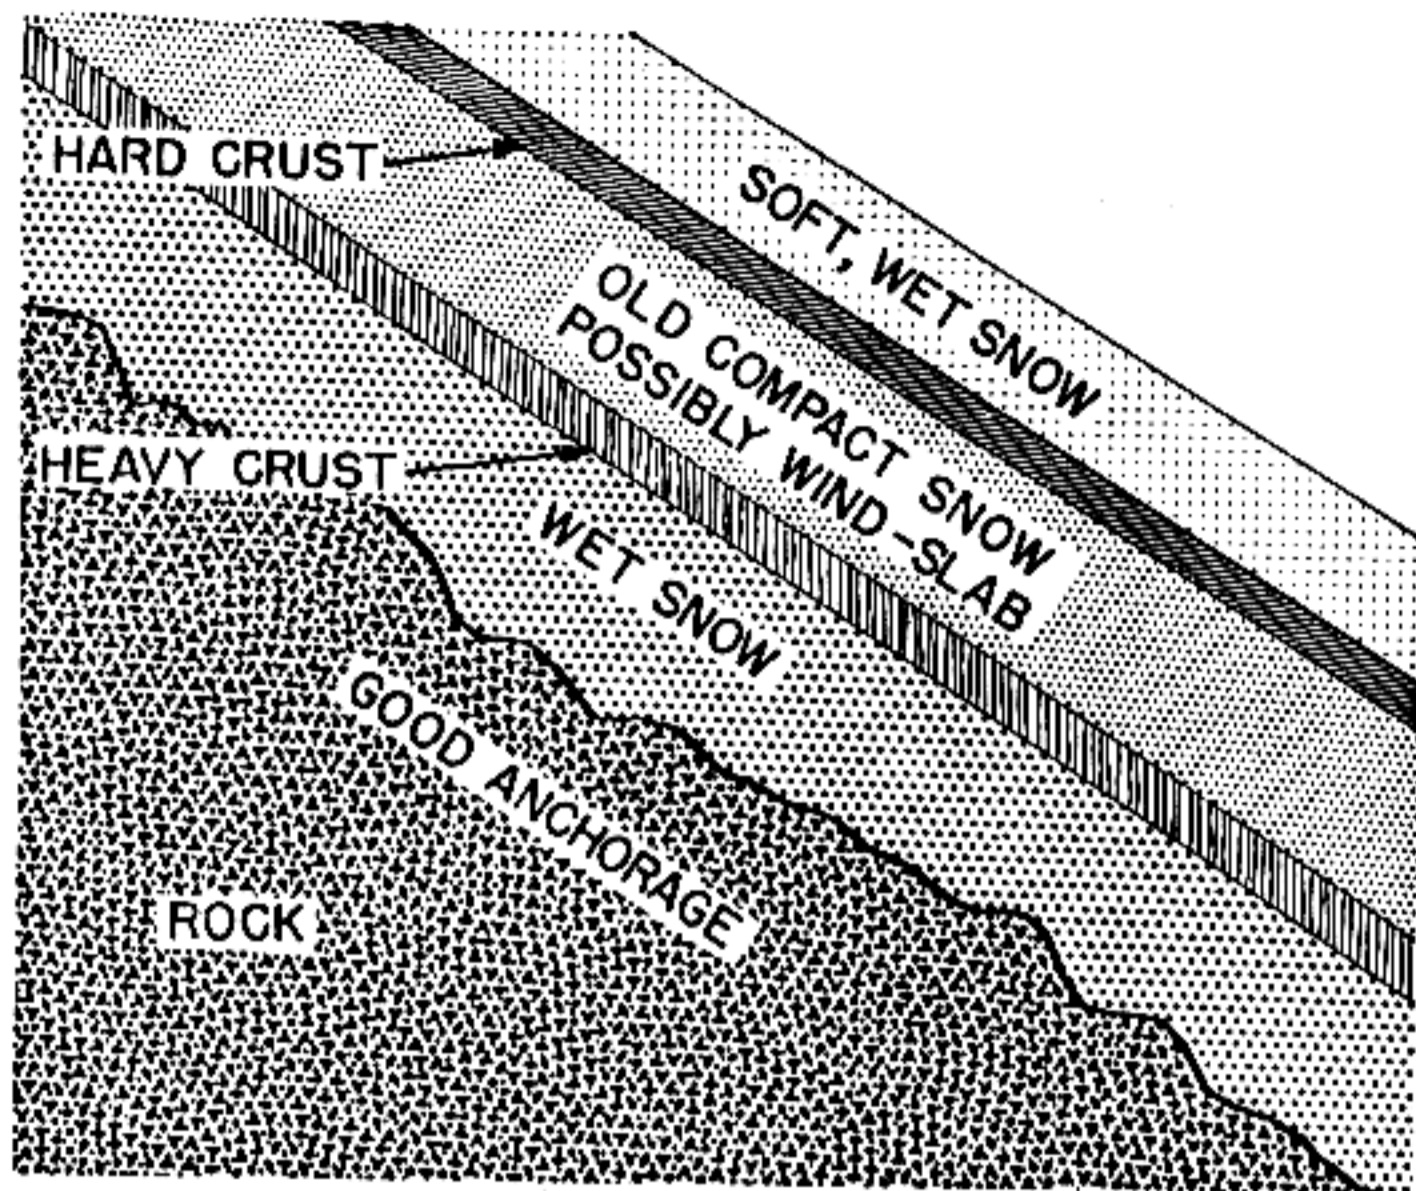


Figure 65. Wet snow avalanche—composition of snow layers.

to dry, loose snowslide)) behaves in an altogether different manner from loose snow. It has the ability to retain its unstable character for days, weeks, and even months, thus leading to the release of delayed-action avalanches unexpectedly, and often from minor causes such as the addition of a small amount of new snow, a skier cutting across a hillside, sun action, or even a minor vibration.

- (b) The windslab avalanche combines great mass with high speed to produce maximum energy. It may originate either at the surface or through the collapse of a stratum deep within the snowpack. It starts on a wide front with penetration in depth. The entire slab field—top, sides, and bottom—releases almost simultaneously. The place where the slab has broken away from the snow pack is always marked by an angular fracture line (fig. 68 (note that it broke at the sharpest part of the curve on a convex slope)) instead of a point, roughly following the mountainside contour. In a packed-snow avalanche the main body of the slide



Figure 66. Wet snow avalanche.

reaches its maximum speed within seconds. Thus it exerts its full destructive power from the place where it starts, whereas a loose-snow avalanche does not attain its greatest momentum until near the end of its run.

- (c) Due to the characteristic delayed release action as stated above, the slab avalanche is the most dangerous of all types. A series of slab avalanches may stabilize conditions only locally, leaving the slab on an adjacent slope as lethal as an unexploded shell. If found on the surface, snowslab has a dull, chalky, nonreflecting ap-

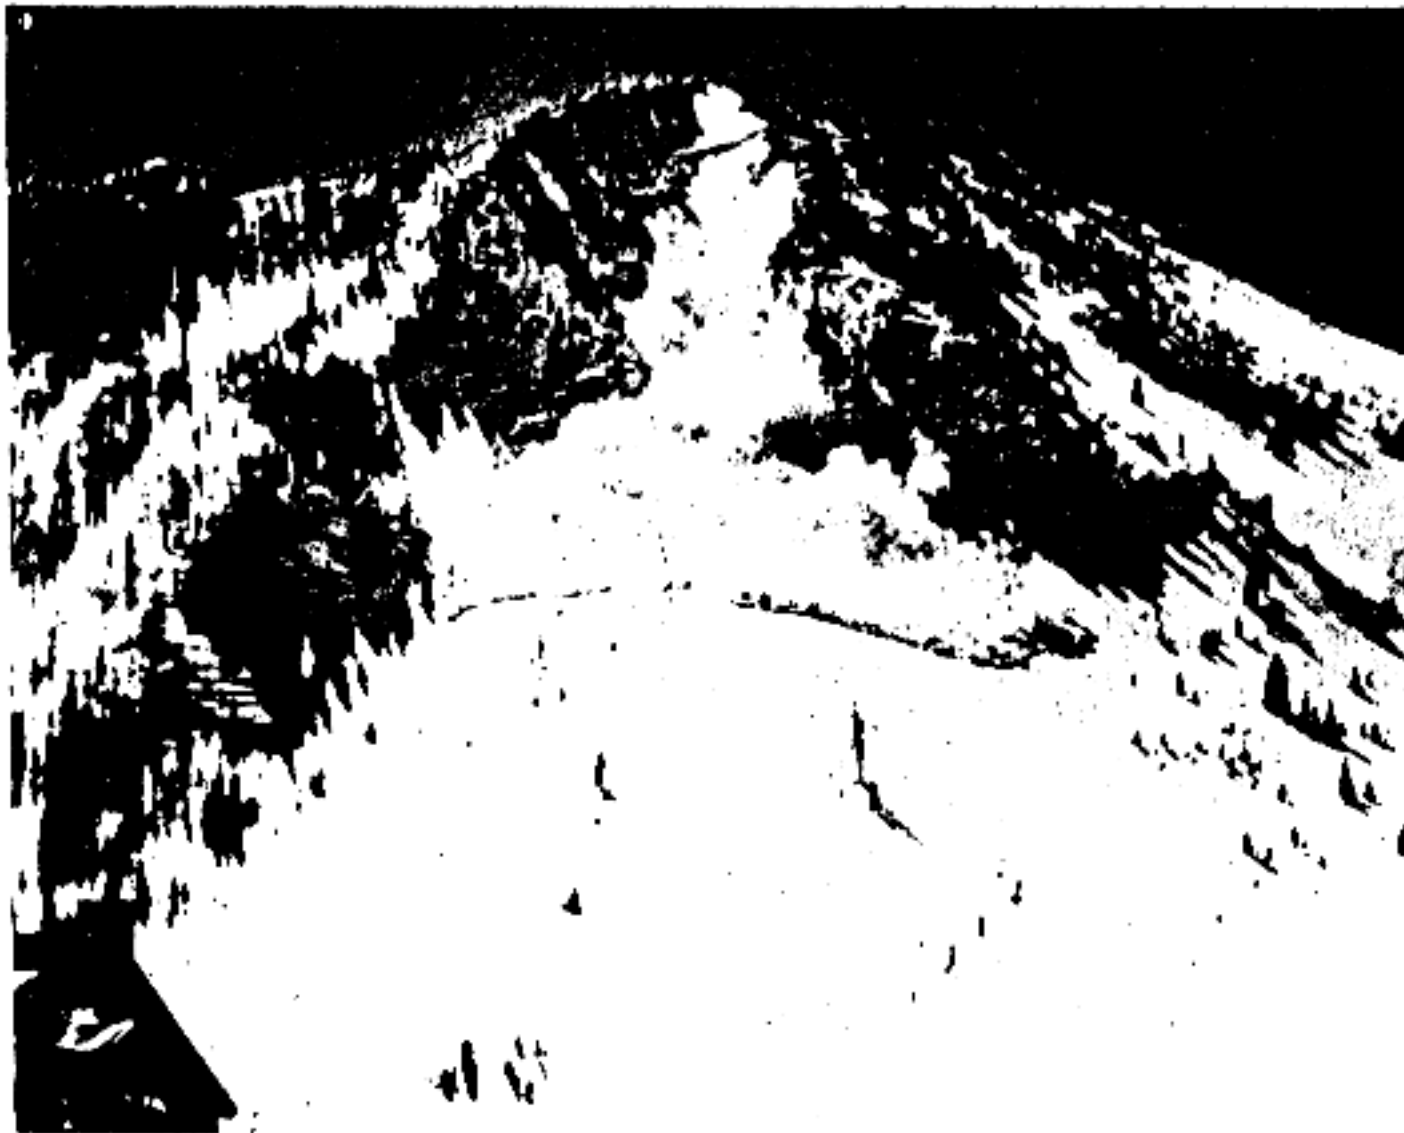


Figure 67. Slab avalanche—depth of fracture 10 feet.

pearance. It has a hollow sound underfoot, if the slab is hard, it often settles with a crunching sound which an experienced mountaineer recognizes as a danger signal. The only way to insure that movement across slab formation is safe, is to break the slab by one or the other stabilization methods described in paragraph 168b.

- (2) *Cornices.* Cornices (fig. 69) are a snow formation allied to the slab. They build up on the lee side of mountain crests and ridges which lie at right angles to the wind. Occasionally they are straight-walled, but their characteristic shape is that of a breaking wave. The obvious hazard from cornices is due to fractures of the overhang from simple overloading, weakening due to temperature or rain, or from sun erosion of the underside. These falling blocks are generally large enough to be dangerous themselves and may also release avalanches on the slope below.

d. Combination Avalanches.

- (1) *General.* Combination avalanches are composed of both loose and packed snow formations making it more diffi-

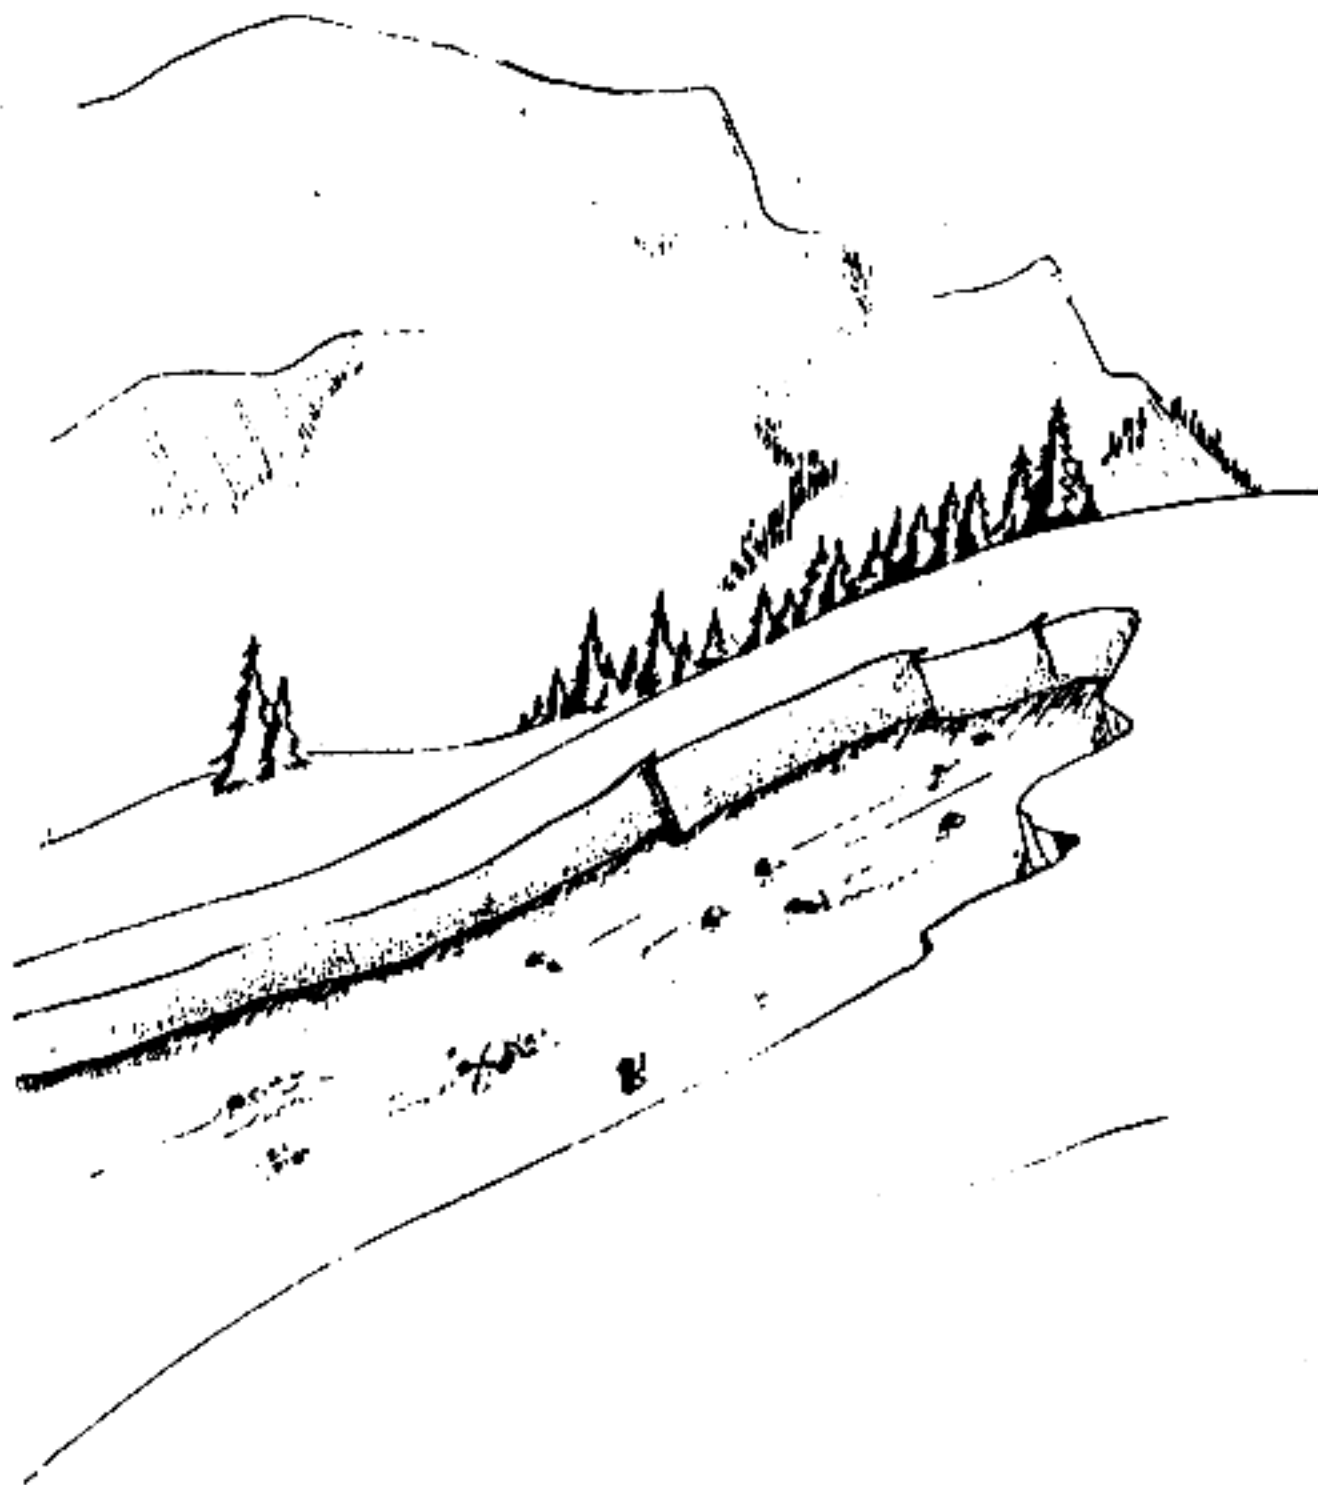


Figure 68. Slab fracture.

cult to determine which part of the combination acted as the trigger and which as the main charge of the avalanche.

- (2) *The climax avalanche.* The climax avalanche is a special combination type. The distinguishing characteristic of this type avalanche is that it contains a large proportion of old snow and is due to conditions which have developed over a considerable period of time—at least a month and possibly an entire season. Climax avalanches occur infrequently because they require an unusual combination of favorable factors. Whenever they occur, the penetration of a climax fracture is always in great depth, usually to the ground. They travel farther and spread

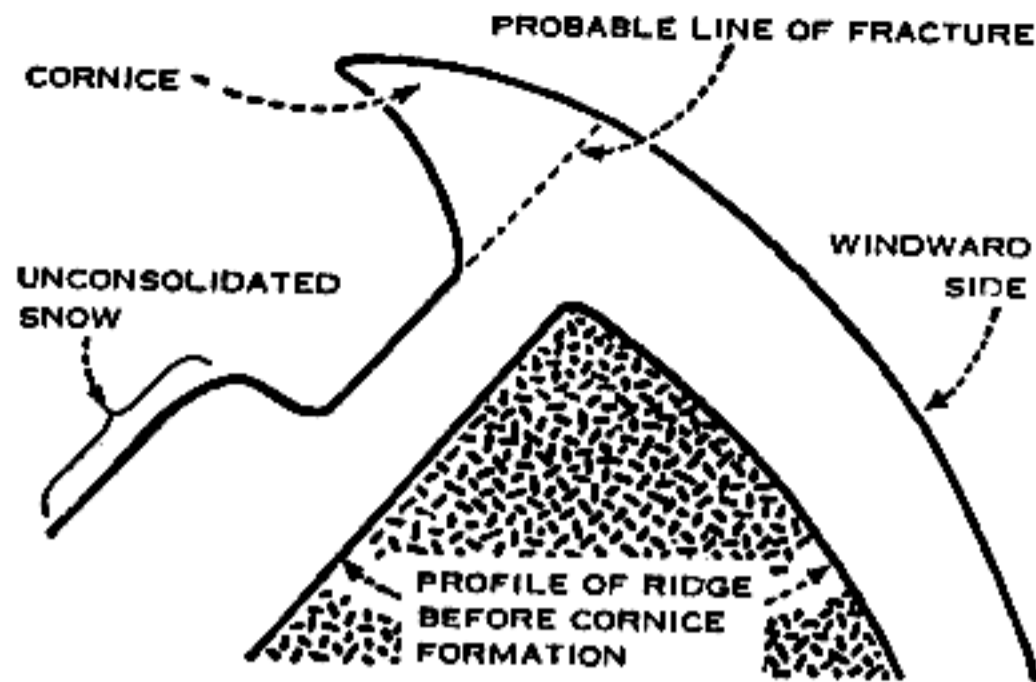


Figure 89. Cornice.

out wider than ordinary avalanches on the same slide path.

166. Avalanche Triggers

a. Triggering. A loose-snow slide usually occurs during or immediately after a storm or some other weather situation that creates instability. A slab avalanche may come as a delayed action. In any case, every avalanche must have a "trigger." There has to be some final nudge, some force or combination of forces, to account for the release of masses of snow at a particular time and place.

b. Classification. The following four avalanche triggers are recognized:

- (1) Overloading.
- (2) Shearing.
- (3) Temperature.
- (4) Vibration.

c. Overloading. Weight is probably the most frequent cause of avalanches. New snow piles up until it overcomes cohesion and the structure collapses of its own weight and begins to slide.

d. Shearing. This can be applied in various ways—the slicing action of a pair of skis, a wad of snow falling out of trees or over a cliff, or any exterior force that cuts the bond. A slide in motion has a shearing effect on the snow beneath, coupled with vibration.

e. Temperature. Temperature triggers more avalanches than any other factor, except weight, by its effect on the cohesion of snow. A rise in temperature weakens the bonds, while a fall in temperature retards settlement of the snow mass and increases the brittleness and tension of a slab.

f. Vibration. This factor is related to shearing, but it is treated separately because, unlike the other triggers, it can operate at long range. Avalanches may be released by thunder, shock waves originating from high speed aircraft, explosions of various types, by earthquakes and by other loud or sharp sounds—vibrations transmitted through the air. They may also be started by vibrations transmitted through the earth and snow by the movement of tanks, bulldozers and other heavy machinery, or by blasts. The primary or reflected blast waves resulting from the detonation of even a small-yield nuclear weapon will cause a great number of avalanches and rock slides up to distances of 20 miles or more from the point of detonation.

167. Avalanche Hazard Forecasting

a. General. The accurate prediction of an avalanche occurrence either in time or location is impossible. The actual avalanche occurrence is governed by a set of variable factors which cannot be reduced to any mathematical formula at present. The experienced mountaineer can usually recognize the development of a hazardous situation in sufficient time to avoid the danger area.

b. Terrain and Climate. Terrain and climate are the two basic causes of avalanches. Terrain is a constant, always prepared to do its part; climate is the variable.

c. The Contributory Factors. The systematic avalanche studies conducted in the past have identified ten factors which contribute to the avalanche hazard. These factors which are subdivisions of climate and weather are as follows:

- (1) *Depth and condition of the base.* Two feet depth is generally sufficient to cover ground obstructions and provide a smooth sliding base. Greater depths will obliterate such major natural barriers as terraces, gullies, outcrops, and clumps of small trees. If depth hoar exists, the slope must be presumed to be dangerous, for the snowpack has no anchorage at its underside. Depth hoar is usually at the bottom of the snowpack, and can be detected by reversed ski poles, skis, or probes.
- (2) *Old snow surface.* A loose snow surface promotes good cohesion with a fresh fall but allows deeper penetration of any avalanche that starts, while a crusted or wind packed surface means poor cohesion with the new snow but restricts the avalanche to the new layer.
- (3) *Depth of new snow.* The quantity of new snow sufficient to produce a dangerous avalanche is important. Based upon experience, 12 inches of new snow is regarded as

- the minimum requirement to produce by itself an avalanche of dangerous proportions.
- (4) *Type of new snow (especially its free moisture content).* Very dry snow has few cohesion qualities and avalanches so readily that it seldom builds up to dangerous volume except under true blizzard conditions. The moisture in damp snow acts as a cement and improves cohesion, within limits. Wet snow is saturated and the water "lubricates" rather than cements. Transition snow (snow which is on the dividing line between dry and damp) is especially susceptible to the formation of slab under wind action.
 - (5) *Average density.* The average density (water content per inch of snow) of dry snow varies from .06 to .10 inch of water per inch of new snow. The very dry snow, typical of the high alpine zones but found occasionally in other areas, is much lighter. Densities as low as .04 are common. Damp and wet snow in contrast has a density as high as .14. These are normal average density characteristics and have no unusual significance. However, the important circumstance is a departure from the normal, for example, when the proportion of water in dry snow exceeds 10 percent, it becomes evident that its weight may be increasing faster than its cohesion and a slide may occur.
 - (6) *Snowfall intensity (inches of snowfall per hour).* When the snow piles up at the rate of an inch or more per hour the pack is growing faster than the stabilizing forces, such as settlement, can take care of it. Moreover, this sudden increase in load may fracture a slab beneath and result in a slide.
 - (7) *Precipitation intensity (moisture content per hour of snowfall).* Based upon experience it is concluded that with a continuous precipitation intensity of one tenth of an inch of water or more per hour and wind action at effective levels the avalanche hazard becomes critical when the total water precipitation reaches one inch. This is one of the newest methods used in avalanche forecasting requiring interpretation by weather station personnel with special equipment.
 - (8) *Settlement.* Settlement of the snow goes on continuously. With one exception it is always a stabilizing factor. The exception is the shrinkage of a loose snow layer away from a slab thus robbing it of support. In new snow a

settlement ratio less than 15 percent indicates that little consolidation is taking place; above 30 percent, stabilization is proceeding rapidly. Over a long period ordinary snow layers shrink up to 90 percent, but slab layers may shrink no more than 60 percent. Thus abnormally low shrinkage in a layer indicates that a slab is forming.

- (9) *Wind action.* Wind action is an important contributory factor. It overloads certain slopes at the expense of the others, it grinds snow crystals to simpler and less cohesive forms, it constructs stable crust and fragile slab, often side by side. Warm wind ("chonook" of North America and the "foehn" of Europe) is an effective thawing agent, even more effective than sunlight. By sudden changes in direction and velocity, wind can act as a shearing trigger on a layer of snow it has just deposited. Finally, it is essential to the formation of slab in ways which are not yet completely understood. An average velocity of 15 mph (in the mountains air currents are so erratic that they can only be sampled) is the minimum effective level for wind's action in building avalanche hazards.
- (10) *Temperature.* Temperature directly influences the snow type. Dry snows normally fall at 25° F. and below. Temperatures above 28° F., promote rapid settlement and metamorphosis of the snow is sometimes too rapid. A sudden rise of temperature causes a loss of cohesion fast enough to trigger an avalanche. A sudden drop increases the tension particularly in slab. The gradual warming of the temperature in the spring leads to cumulative deterioration of the snow and to heavy, wet avalanches.

d. Avalanche Conditions. Avalanches obey mechanical laws which can be identified and evaluated by trained personnel with special equipment. The soldier in the field must generally rely on the following factors:

- (1) Terrain—grade 30° or steeper.
- (2) Old snow depth—enough to cover ground obstructions.
- (3) Surface crusted—snow slides easily but only new snow will slide. Surface loose—good cohesion between layers but both old and new snow may slide.
- (4) New snow depth—10 inches or more.
- (5) Snowfall intensity—1 inch per hour or more. Can be assumed when snowfall is heavy enough to restrict visibility to 100–200 yds.

- (6) Precipitation intensity—.10 inch per hour of water or more plus strong wind action. Can be assumed if snowfall intensity is 1 inch per hour and snow is damp or noticeably heavy for dry snow, or dry snow is granular or pellet in type.
- (7) Settlement—noticeably low. Watch the snow collars around the trees or posts.
- (8) Wind—15 mph or higher average. Can be assumed if snow is blown parallel or almost parallel to ground.
- (9) Temperature—any sudden change up or down. Thawing temperature day and night for 36 hours; that is, no overnight freeze.
- (10) Depth hoar—must be assumed on any avalanche slope in the high alpine zone.

168. Protective Measures

Several methods can be used to reduce the effects of the avalanche hazard. Some of the protective measures that may be taken by units in avalanche areas are—

a. *Restrictions.* Based upon terrain analysis and reconnaissance, areas which are considered hazardous may be placed "off limits" for all troops for a certain period of time. This may affect only a few narrow avalanche paths, or an entire valley, or several valleys depending upon the terrain and weather conditions in the area of operations. Enforcement of restrictions may be a necessity even if the troops involved are required to conduct long and time-consuming detours.

b. *Stabilization.* In combat, individuals and units may be required to take calculated risks and enter areas described as hazardous. The risks can be considerably reduced by application of the following stabilization methods:

- (1) *Stabilization by skiing.* By this means, the snow is caused to settle on the dangerous slope. Constant use of the hazardous slidepath area also prevents the snow from building up avalanche conditions. The work is done by teams of expert skiers (2 and 3 on each team). Great care, coordination between teams, and supervision must be exercised due to the dangerous nature of the work. The leading man in the party, using the avalanche cord and being belayed by the other members of the team, skis the release points of the slope. The roped party proceeds in a similar manner as described in chapter 4. As a result of this skiing action the snow will be either stabilized or the slide triggered, either result removing the avalanche hazard.

- (2) *Stabilization by means of explosives.* Under extremely dangerous conditions it may be safer to stabilize the snow by using hand-placed charges or hand grenades. The safest way to do this is to throw charges of approximately 5 pounds over the crest, having the electric wire coiled so that the charge lands on the slope 15 to 20 feet below the crest. The charge may then be safely detonated from behind the crest. Under certain snow conditions more powerful charges may be required. As a rule of thumb approximately 5 to 10 pounds of TNT controls 100 feet of slope width. Huge cornices are blasted by digging charges into the snow along the probable line of fracture. Individuals digging holes and placing charges must be belayed from the crest while working.
- (3) *Stabilization by artillery and infantry weapons.* Carrying explosives and demolition equipment up mountain slopes in deep snow is hard work. An easy way to cause the snow to slide is to use artillery pieces within their range. Due to the difficulty of moving artillery pieces off the road or over secondary mountain trails, recoilless rifles become the handiest tool in campaigns against avalanches.
- (4) *Stabilization by aircraft.* Due to the fact that the use of artillery pieces as well as recoilless rifles is limited within their range, avalanches may be set off against lines of communications deep in enemy territory by use of aircraft. The pilot selects suitable slopes and causes the snow to slide by using guns, rockets, or sonic boom.

c. Use of Barriers. Lines of communications as well as various types of fixed installations which are under avalanche threat can be protected by construction of avalanche barriers. Barriers can be formed by adding rocks and earth, concrete, or other similar materials to any natural obstacles existing in the area. This additional bulkhead will tend to absorb some of the tremendous energy of the slide. Diversion walls and piers may also be used to confine the avalanche to a certain path, or turn it away from the installation to be protected. Such work is normally undertaken only during static situations due to the amount of effort involved.

169. Safety Rules

a. General. Avalanches are one of the principal dangers of winter mountaineering. Many of the hazards peculiar to avalanche areas can be avoided or their danger greatly reduced by knowing and practicing a few simple, common sense rules. The following

rules of conduct are adhered to whenever it becomes necessary, due to tactical or technical reasons, to negotiate snow-covered terrain which threatens to avalanche.

b. Adjusting Equipment. To insure freedom of legs and arms, the safety strap on the ice axe is removed from the wrist. When using skis, the bindings are loosened to facilitate their quick removal, and ski pole straps are removed from the wrists. Skis in particular tend to get tangled, restrict movement, and get dragged under the sliding snow. When snow conditions permit, such danger zones may be negotiated more safely on foot, carrying the skis. While skiing, falling is avoided and all movements are executed with caution.

c. Selection of Routes. Learn the avalanche paths and, whenever possible, detour around the hazardous slopes. The crest of a ridge is a safe route, but never move on the overhang of the cornice. Avoid moving along the bottom of narrow, V-shaped valleys (point X in fig. 70) where a disturbance of the snow



Figure 70. Danger of double avalanche.

could cause a double avalanche (from both sides) and fill the narrow valley floor with masses of snow instantaneously. Movement along the middle of wide, U-shaped valleys is less dangerous, since avalanches occurring there would tend to expend their force on the wide floor of the valley with little danger to troops moving in the middle. Do not move above natural barriers such as moraine (point Y in fig. 71) located on the valley floor, since the slide obviously collides with the barrier.



Figure 71. Danger of avalanche against moraine barrier.

d. Weather. Obtain the latest weather forecast from the best available sources prior to starting a move. During the move be alert for any signs of a change in the weather. Any sudden change can be dangerous.

e. Ascent and Descent. When avalanche slopes must be ascended or descended they are climbed as straight up or as straight down as possible, preferably along a line of protruding rocks, ledges, and trees where the snow cover is less likely to slide. Traversing

back and forth is avoided since the snow cover is dissected and greatly disturbed in this manner. Ravines, gullies, and low terrain features which are locations of snow deposits are avoided as much as possible.

f. Observation and Testing. The area to be traversed must be constantly observed for signs of danger. It should be tested whenever the tactical situation will permit. Before entering a dangerous slope, a small area of the same grade and exposure should be tested. Windslab formations should be avoided, since they give a false impression of their solidity. Watch the shadows; when they point at a slope like warning fingers, sun action is at its maximum. Seek the protection of heavy timber, windbeaten slopes, and terrain barriers.

g. Proper Timing. Hole-up during and after a severe storm until the snow has had time to slide or settle. Movement is possible the first few hours of a storm. Use the time to get out of avalanche terrain. In spring avalanche weather, the period between 1000 hours and sundown is the most dangerous. The early morning hours before sunup are the safest.

h. Proper Distance. In movement over areas of avalanche danger, distance between individuals is greatly increased and maintained in accordance with prevailing conditions and the area to be negotiated. Only one or the least possible number of individuals are exposed to this danger at one time. If a dangerous slope, steep hollow, or gully must be traversed, let one man test the slope, belayed with the climbing rope by other members of the party. Visual contact is constantly maintained and, if necessary, warning posts are established or observers are stationed at safe locations along the route.

i. Use of Avalanche Cord. On reconnaissance missions in avalanche areas and especially when testing, one end of a brightly colored cord (60 to 70 feet in length) is tied around the body and trailed behind the individual. This brightly colored avalanche cord is an additional safety measure and facilitates location and rescue of individuals buried by an avalanche, since the cord ordinarily remains on or near the surface of the slide.

j. Action of Individuals Caught in an Avalanche. When caught in an avalanche there are certain actions that can be taken by the individual which will greatly increase his chances of survival and recovery. Most important is DON'T PANIC. Maintain self-control and attempt to stay on the surface and get out of the main slide path. Execute "swimming" motions to combat the tendency of the sliding, rolling snow to pull one underneath. Grab any obstruction to assist the fight to the surface. Kick off the skis. After being completely covered by the snow mass, both arms

are held in front of the face and pushed against the covering snow in an attempt to provide an air space before the slide hardens.

k. Selection of Tactical Locations. Great care must be exercised in the selection of battle positions, command posts, outposts, security elements, battery positions, bivouac sites, and administrative support bases in the areas where hazardous conditions exist.

170. Avalanche Rescue

a. Survival Margin. If an individual is caught by an avalanche, prompt and organized rescue operations offer the only hope of getting the victim out alive. There are records of persons who lived as long as 72 hours while buried. Ordinarily the victims are either killed instantly by crushing, or die within a short period from exposure, shock, and suffocation. Suffocation is the most important item. Based upon experiences in the past it can be concluded that two hours is the average survival limit. Snow is porous and ordinarily contains enough air to support life, though not consciousness. In about two hours an icemask, caused by condensation of the victim's breath, forms an air-proof seal around his face and he dies of suffocation. Rescue operations are therefore designed to get the victim out within the two-hour time limit. Due to some special circumstances which may prolong the life of the victim—he may be in an air pocket—rescue operations should not be discontinued for 24 hours at least.

b. Phases of Rescue Operation. Successful rescue operations depend upon decisive leadership, proficiency of the search party, and availability of special equipment. The rescue operation is divided into three phases—immediate action, followup, and evacuation.

(1) Immediate action.

- (a)** The rescue party on duty is alerted. Transportation is arranged, and special equipment is issued.
- (b)** Informant or eyewitness, if available, is questioned for exact location of accident. Any eyewitness, even if in poor physical condition, should return to the scene of the accident with the first party to point out where the victim was last seen. This is extremely important.
- (c)** The first party is dispatched under command of the most experienced officer or noncommissioned officer available. The strength of the party should be at least one squad or, preferably, one platoon, and should in-

clude an aid man. This party should be on the way within 15 minutes after receiving the alarm.

- (d) The first party moves out lightly equipped. Speed is the first consideration.
- (e) Upon reaching the scene of the accident, the leader of the party posts an avalanche guard for the protection of the search party, when necessary.
- (f) The "last-seen point" is located and marked so that it cannot be obliterated by wind or snowfall. From his point downhill, the party makes a hasty search of the slide surface for the victim or any part of his equipment.
- (g) If any indication of the location of the victim is found, the probing begins in that vicinity. If no indications are found, the probing starts in likely locations such as obstructions in the slide path. Trees, boulders, and transitions cause obstructions. The tip and edges of the slide are also searched. A human body is bulky and all being equal, is apt to be thrown toward the surface or the sides.
- (h) If the victim is found, first aid (artificial respiration) must be administered at once.

(2) *Followup.*

- (a) The strength of the first rescue party is usually small to enable them to get ready and move out rapidly. If the area to be searched is extensive, a second or followup party must be sent to the accident scene as reinforcements. The second or followup party should move out in half an hour or not later than one hour. It carries a complete set of equipment including probes, shovels, 200-pound sled, radio, rations, and other items as required.
- (b) In the 30-60 minutes at his disposal, the unit commander or his representative organizes and equips the followup party and notifies all necessary military authorities of the incident.
- (c) If the first party has been unsuccessful, the followup party begins systematic probing of the slide, beginning at the tip and working up toward the "last-seen point" (fig. 71). Probers are spaced shoulder to shoulder and probe every square foot. Probes must be pushed through the snow very cautiously to avoid injuring the victim. If the last-seen point is known, a special group may be assigned to probe any sections of the strip from this point downhill.

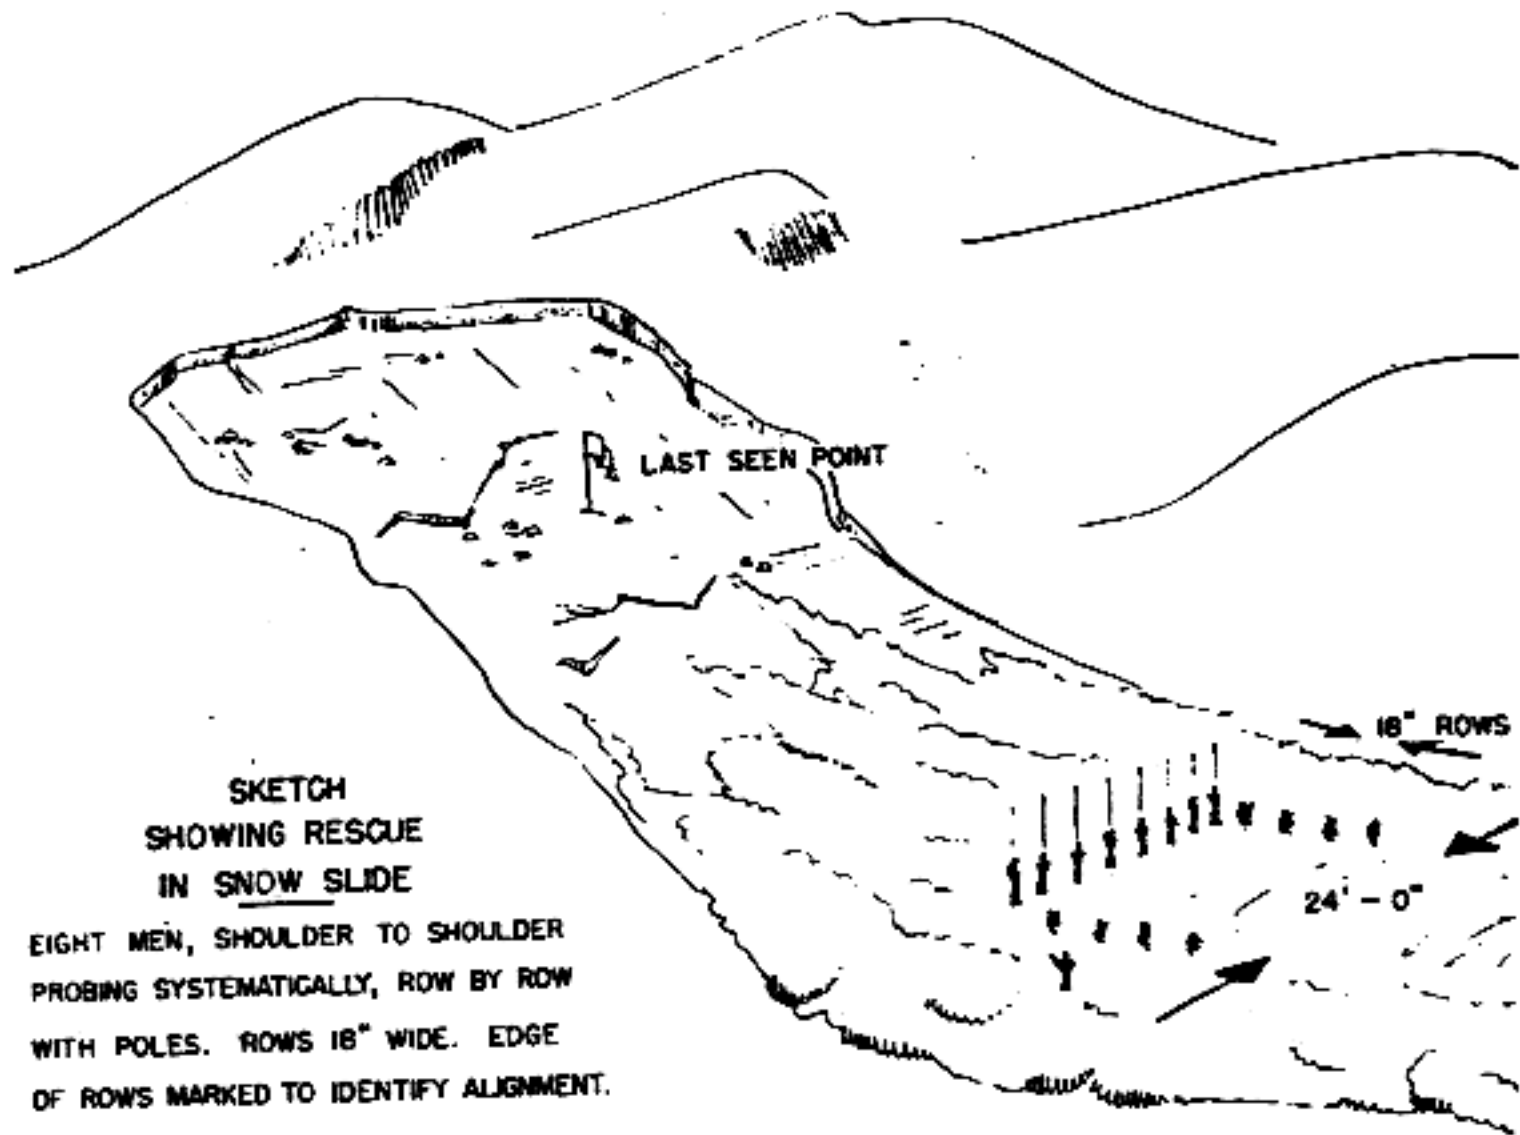


Figure 72. Probing diagram.

- (d) The first party may be relieved by the reinforcements if necessary.
 - (e) Shovel crews are organized to assist the probers, relieving them at intervals and digging in any likely spots. They should be prevented from haphazard digging and wasting energy.
 - (f) Time spent in systematic probing should not exceed 3 to 4 hours. If this is unsuccessful, the slide must be trenched by the reinforcing elements.
 - (g) Trenches are dug parallel to the contour down to ground level or undisturbed snow at intervals of six feet. Digging begins at the tip of the slide and proceeds uphill. It is feasible to space the shovel teams along one trench with frequent intervals. In this manner snow from one trench can be thrown into the one just completed.
 - (h) If trenching is necessary, the operation ceases to be of an emergency type.
- (3) *Evacuation.* Artificial respiration for suffocation is administered to the victim as outlined in FM 21-11. The evacuation is conducted as outlined in chapter 3 and in FM 31-70.

c. *Avalanche Rescue Equipment.* The following rescue equipment is considered the minimum for organizations of the battle group size; it should be readily available to the alert force at all times:

- (1) 12 probes (sectional preferred—otherwise metal or wooden rods 1/2-inch diameter, minimum 12-foot long).
- (2) 12 snow shovels or shovels, GP, round point, short D-handle.
- (3) 12 flashlights with spare batteries.
- (4) 6 climbing ropes, nylon, 120 feet long.
- (5) 6 avalanche cords, colored, 65-100 feet long.
- (6) 1 sled, 200-pound, with harnesses and tow ropes.
- (7) 1 emergency evacuation bag or 2 sleeping bags, arctic.
- (8) 1 set of first aid equipment to include chemical heating pads.
- (9) Emergency rations.
- (10) Stoves and cooking equipment.
- (11) Skis, ski poles, and climbers for each individual.
- (12) Tentage.
- (13) AN/PRC-6 and AN/PRC-10 type radios.

Section IV. MOVEMENT OVER SNOW AND ICE

171. General

a. Movement over snow with the aid of skis and snowshoes is discussed in detail in FM 31-70.

b. The principles which apply to movement over rocky terrain also apply to over-snow travel when skis or snowshoes are not used. When snow lies over a foundation other than glacier ice, and the terrain is not steep, no special techniques are called for. Efficient progress depends largely upon proper route selection and on using such procedures as minimize exertion. Rock climbing requires gymnastic agility, combined with good judgment in selecting a safe and direct route.

172. Movement Over Snow and Ice

a. On very steep slopes in deep snow, the climber may climb straight up facing the slope. The ice-ax driven directly into the snow provides a quick and effective protection in case of a slip. It is usually best, however, to climb snow slopes in a zig-zag fashion in order to conserve strength. If the snow is hard-frozen firm, the composition sole of the boot will generally hold by kicking steps, even in steep slopes. Where it is difficult to make an effective scrape with the boot, a scrape with the adze end of the ice-ax makes an effective step. In these situations crampons should be used for faster and easier movement.

b. When descending in snow, one can usually come straight down even in steep terrain. Movement downhill should be slow and deliberate and with an even pace. The heels should be kicked vigorously into the snow wherever it is hard packed. The body may be kept erect with the help of ice-ax, which may be jammed into the snow at each step for additional safety. Here again, crampons or step-cutting should be utilized.

c. Step-cutting in ice is done with the pick end of the ice-ax. In cutting ice a blow directly in and another diagonally toward the first will usually fashion a rough step which may be finished off with the adze end of the ice-ax. Black (dark) ice is harder and requires more blows. The blows should be directed into the ice at as near a right angle as possible to reduce the danger of flaking off the outside layers. The step should slope slightly inward. It does not need to be commodious except at resting places. In climbing, steps may be cut straight up or on a diagonal line of ascent. In descending it is seldom practicable to do anything except to cut steps in a diagonal line.

d. Use of crampons greatly facilitates ice and snow climbing. Balance is very important and the ankle should be flexed so that

the crampon points are at right angles to the slope. On hard snow the points of the crampons will bite easily, but on ice the foot should be stamped down hard to drive the spikes in.

e. Belays are more difficult to secure on ice and snow than on rock, but they are equally necessary. In general they are obtained by use of the ice-ax although ice pitons are also used; for rappelling, a belay point can be cut directly into the ice itself.

f. On hard packed snow slopes which can be seen from top to bottom and which are not too steep, it is possible to glissade (fig. 72). Glissading should not be attempted unless the bottom of the slope can be seen, otherwise unseen obstacles may result in serious falls. Glissading in a sitting position gives little control of descent. In the standing position, the body must always be kept erect, as nearly upright as possible, and with the ice-ax firmly held in the hands. The ice-ax is pressed back into the snow when necessary. Turning the toes to one side or the other changes the course of descent. Turning sharply to the side on which the ice-ax is held increases the pressure on the ice-ax and brings one to a stop. To slow down, pressure of the ice-ax is sufficient. Glissading down solidly frozen ice slopes is dangerous, and should not be attempted.

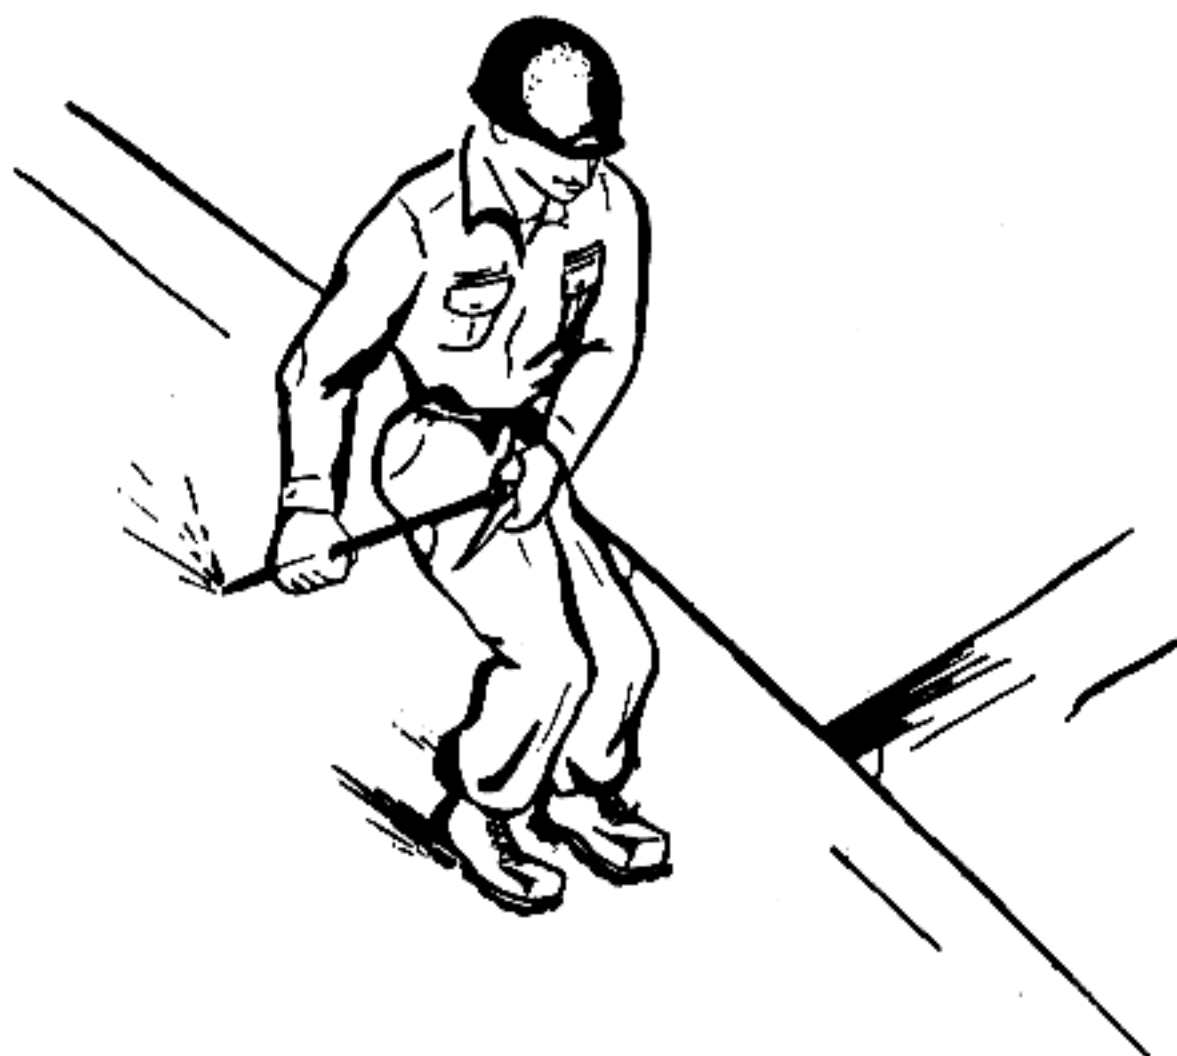


Figure 73. Glissading.

Section V. MOVEMENT OVER GLACIERS

173. Principal Dangers

a. The principal dangers of glacial regions are crevasses, ice-falls, and ice avalanches.

b. Glacial crevasses make movement on a snow covered glacier very treacherous. In winter, when visibility is poor, the difficulty of recognizing them is increased. Toward the end of the summer, crevasses are broadest and are covered by the least snow. Snow bridges constitute the greatest potential danger in movement over glaciers.

c. In a steep pitch of a glacier, ice pinnacles and towers rise in a composition of criss-cross crevasses. These break off and fall because of gradual melting, their own weight, and the movement of the glacier. Ice avalanches result and often threaten men at the foot of ice wall hanging glaciers. The greatest dangers lie in the gullies below hanging glaciers. Such threatened zones must be crossed as fast as possible and are safer before sunrise.

d. Light and heat rays reflected from ice, snow, water, and bright rocks irritate and burn the skin very rapidly, causing glacial sunburn. Sunburn can occur on cloudy days. A strong wind will make the burn more severe. Sunburn cream should be used frequently on all exposed skin surfaces. It is particularly dangerous to expose parts of the body which are not accustomed to the sun's rays. As soon as any part of the body becomes burned, it should be protected from further exposure. Particularly bad cases of burn very often lead to fever and also to a lessening of muscular activity. It may often take several days before the casualty is fit for duty.

e. Snow blindness occurs when sun is shining brightly on an expanse of snow, and is due to the reflection of ultraviolet rays. It is particularly likely to occur after a fall of new snow, even when the rays of the sun are partially obscured by a light mist or a fog. In most cases, snow blindness is due to negligence or failure on the part of the soldier to use his goggles. Symptoms of snow blindness are a sensation of grit in the eyes, pain in and over the eyes, watering, redness, headache, and photophobia (distaste for light). Pontocian or butyn ointment and zinc sulphate drops are the prescribed treatment for snow blindness. A poultice of cold used tea leaves may be used to give relief if the drops are not available. Dark eye shades or bandages should be placed over the eyes.

174. Use of Rope

A roped party of two, while ideal for rock climbing, is at a

great disadvantage on a snow-covered glacier, since it is almost impossible for one man alone to rescue another who has fallen into a crevasse. The best combination is a three-man party, tied in on a single rope. Each member should carry in a coil enough of the intervening rope to eliminate a direct pull on his body loop. The rope should touch the snow as little as possible, since a wet rope kinks badly and may freeze and become unmanageable (fig. 74). It is best to travel roped at all times when on the snow-covered part of a glacier. At times, it may desirable to use the rope on the snow-free part also.

175. Routes

The individual operating in the mountains must appreciate certain limitations imposed by nature in glacier movement. Access



Figure 74. Method of carrying rope coil when moving on glaciers.

to the end portion of a glacier may be difficult due to abruptness of the ice and possible presence of crevasses on this section of a glacier. Additional obstacles in getting onto a glacier may be swift glacier streams, steep terminal or lateral moraines and abrupt mountain terrain bordering the glacier ice. The same obstacles may also have to be overcome in getting on or off a valley glacier at any place along its course. A further consideration to movement on a glacier are steep sections, heavily crevassed portions, and ice falls which may be major obstacles to progress. Previous reconnaissance from a vantage point on the ground, the use of up to date aerial photographs, and aerial reconnaissance of the area of operations are most valuable and should be made in advance.

176. Crossing Crevasses

a. Crevasses which gape wide open are obvious, and their presence is an inconvenience rather than a danger to movement. Narrow cracks can be jumped, provided the takeoff and landing spots are firm and offer good footing. Wider cracks will have to be circumvented unless a solid piece of ice joins into an ice bridge strong enough to support the weight of the party. Such ice bridges are often formed in the lower portion of a crevasse, connecting both sides of it.

b. In the zone that divides seasonal melting from permanent falls of snow, large crevasses remain open, though their depths may be clogged with masses of snow. Narrow cracks may be covered. In this zone, the snow which covers glacier ice melts more rapidly than that which covers crevasses. The differentiation between glacier ice and narrow, snow-covered cracks is immediately apparent, for the covering snow is white, whereas the glacier ice is gray.

c. Usually, the upper part of a glacier is permanently snow covered. The snow surface here will vary in consistency from dry powder to consolidated snow. Below this surface cover of snow are found other snow layers that become more crystalline in texture with depth, and gradually turn into glacier ice. It is in this snow-covered upper part of a glacier that crevasses are most difficult to detect, for even wide crevasses may be completely concealed by snow bridges.

d. Snow bridges are formed of windblown snow which builds a cornice over the empty interior of the crevasse. As the cornice grows from the windward side, a counterpart is formed on the leeward side. The growth of the leeward portion will be slower than that to windward so that the juncture of the two cornices occurs over the middle of the crevasse only when the contributing

winds blow equally from each side of the crevasse. Bridges can be formed also without wind, especially during heavy falls of dry snow, and since cohesion of dry snow depends only on an interlocking of the branches of delicate crystals, such bridges are particularly dangerous during the winter. When warmer weather prevails during the summer, the snow becomes settled, is more compacted and has greater carrying capacity and firmer bridges.

e. Once a crevasse has been completely bridged, its detection is difficult (fig. 75). Bridges are generally slightly concave because of the settling of the snow, and this concavity is perceptible in sunshine, but impossible to detect on dull days or during a snow storm. If the presence of hidden crevasses is suspected, the leader of a roped party must probe the snow in front of him with the shaft of his ice-ax or with some similar instrument. As long as a firm foundation is encountered, the party may proceed, but should the shaft meet no opposition from an underlying layer of snow, a crevasse is probably present. In such a situation, probe closer to the standing place to make sure that the party is not standing on the bridge itself. If so, retreat gently from the bridge and determine the width and direction of the crevasse. Follow and probe the margin until a more resistant portion of the bridge is reached. When moving parallel to a crevasse, all members of the party should keep well back from the edge and follow a course parallel to it.

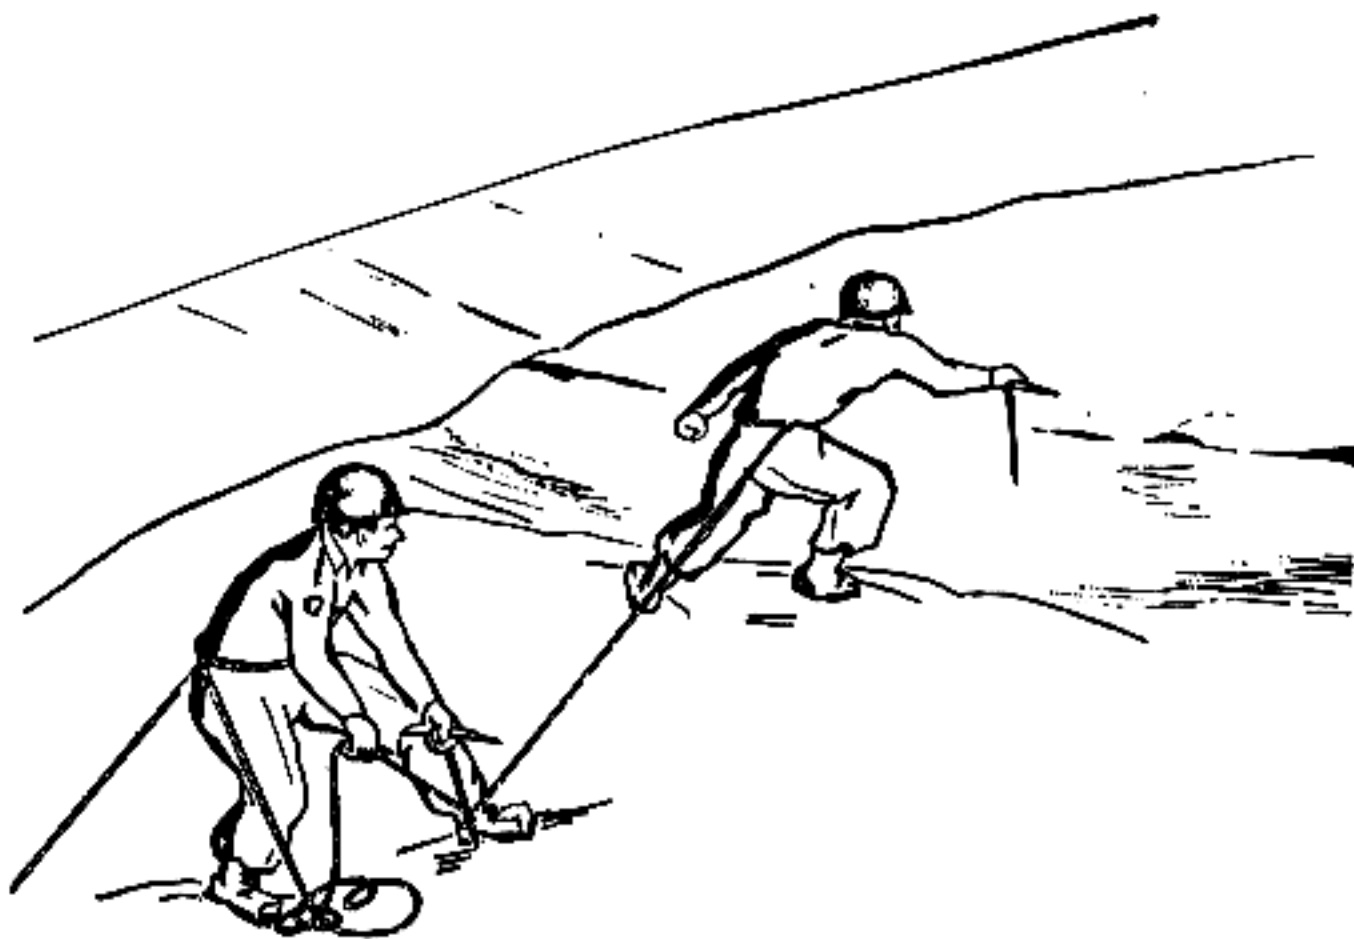


Figure 75. Probing for a crevasse.

f. A crevasse should be crossed at right angles to its trend unless a diagonal bridge is clearly visible. When a bridge which seems sufficiently strong to hold a member of the party has been located, proceed as follows:

- (1) The leader and second man take up positions at least 10 feet back from the edge of the crevasse. The third man stands the full rope distance behind the second man.
- (2) The second man belays the leader by plunging the shaft of his ice-ax firmly into the snow surface, taking a loop around it with the rope, and paying out line as the leader advances. If the snow is too powdery to provide a good anchorage for the ice-ax, the second man should sit in the snow with his feet braced in front of him and use the hip belay prescribed for rock climbing.
- (3) The leader should move forward, carefully probing the snow and evaluating the strength of the bridge, until he reaches firm snow on the far side of the crevasse.
- (4) Having crossed the crevasse, the leader should belay the second man in the same manner as described in (2) above.
- (5) When the second man has crossed safely, the leader should move forward to a secure position while belays are provided for the remaining members of the party by each succeeding climber.
- (6) In case the rope interval is insufficient for the leader to reach firm snow, the second man must unrope, undo the knot, and have the third man move up to a position which will allow the leader to reach a secure position.

g. In crossing crevasses, distribute the weight over as wide an area as possible. The use of skis or snowshoes is recommended for this purpose. If afoot, glide the feet into position. Do not stamp the snow. Many fragile bridges have been crossed by lying down and edging over to the other side.

177. Crevasse Rescue

a. To provide a quick means of holding an unexpected break-through the rope is always kept taut and the rope is secured to the ice-ax handle with a small butterfly knot. As an unexpected break-through by the first man takes place, the second and third man thrust their ice-axes immediately into the snow to arrest the fall. A fall through a snow bridge results either in the climber's becoming jammed in the hole broken by his feet, or in being suspended within the crevasse by the rope (fig. 76).

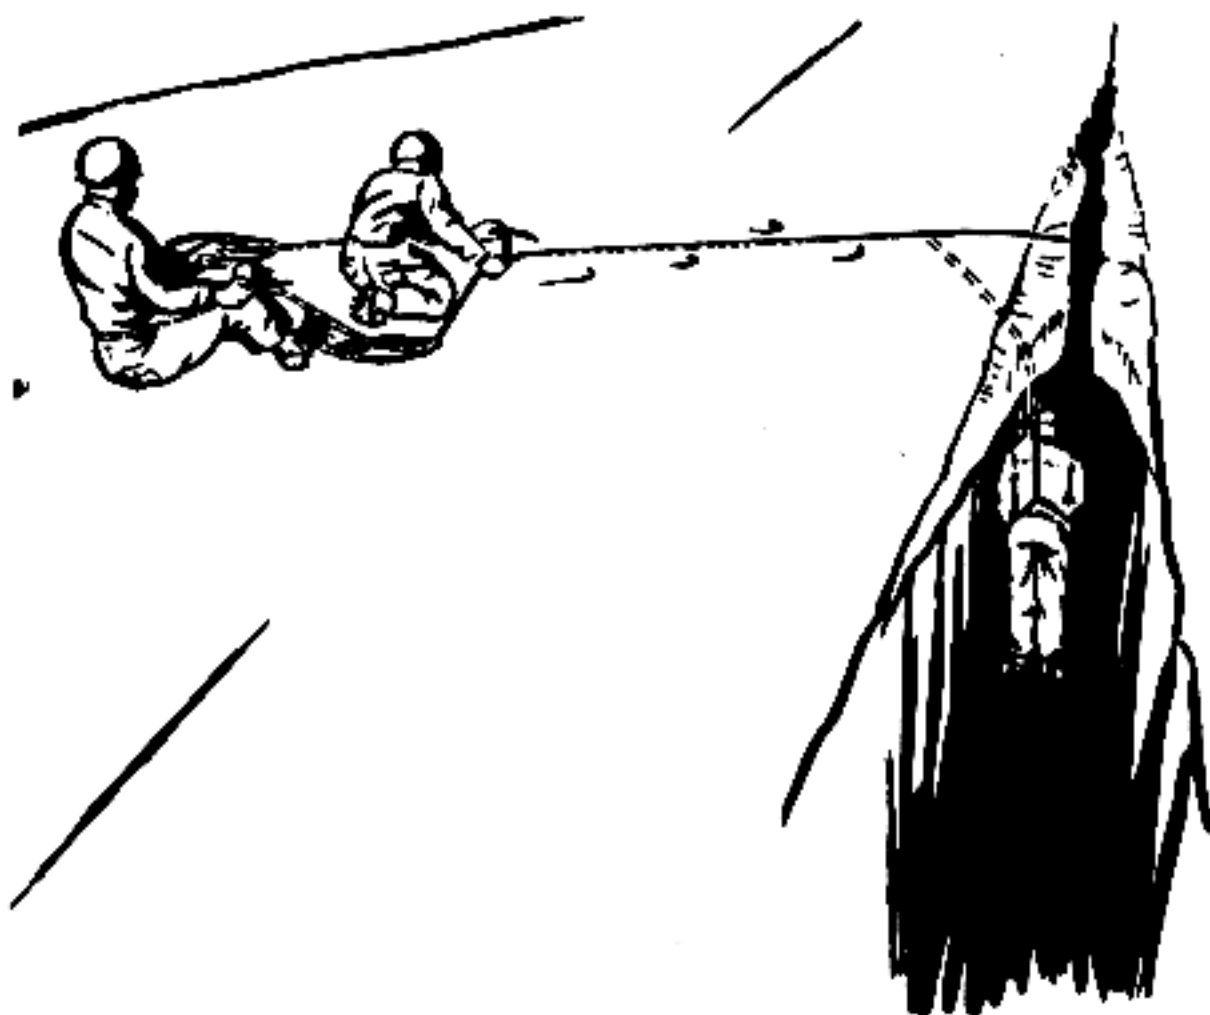


Figure 76. Belaying of leader who has fallen through a snow bridge.

b. If the leader has fallen only partially through the snow bridge, he is supported by the snow forming the bridge. He should not thrash about. This will only enlarge the hole and will result in deeper suspension. All his movements should be slow and aimed at rolling out of the hole and distributing his weight over the remainder of the bridge. Pulling on the rope with one or both hands is of great assistance. The victim can help himself more than he can be helped by the second man, whose duties consist primarily of belaying the rope firmly to check any further break-through on the leader's part. It generally is safer to retain the pack, as its bulk often prevents a deeper fall. Discarding the pack may mean its loss if a larger break-through occurs. Should a climber other than the leader experience a partial fall, the rescue procedure will be the same as for the leader.

c. (1) When the climber is suspended by the rope, the length of his fall depends upon how quickly the rope can be checked and where in the bridge the break takes place. If the fall occurs close to the near edge of the crevasse, it usually can be checked before the climber has fallen more than 5 or 6 feet. However, if he is nearly across, the fall will cause the rope to cut through the bridge, and then even an instantaneous check by the second man will not prevent a considerable fall.

(2) In such a fall, it is necessary to act promptly to relieve the constriction of the loop around the victim. The victim can ease the strain by lifting himself on the rope, but he can do so for only a very short period, during which time those on the surface must ascertain the conditions existing in the crevasse. For example, where firm masses of snow clog the crack some distance below the surface, it is easier to lower the victim to such a platform and begin rescue operations from there. In estimating the conditions within the crevasse, it should be remembered that it is almost impossible to hear the voice of the victim even a short distance from the hole through which he fell. Therefore, one member of the party, while belayed by another, must approach the hole in order to gain the required information.

- d. (1) Since a snow bridge is usually strongest at the edge of the crevasse, a fall is most likely to occur some distance away from the edge. In such places, the rope usually bites deeply into the snow, thus greatly increasing friction for those pulling from above. In order to reduce friction, place an ice-ax or ski under the rope and at right angles to the stress (fig. 77). If a ski is used, place the running surface down so that the rope will not cut on the edges. Push the ice-ax or ski forward as far as possible toward the edge of the crevasse. If the victim is able to reach firm footing within the crevasse, and thus relieve the strain on the rope, the support may be placed at the most advantageous point.
- (2) Whether or not the victim is able to reach firm footing within the crevasse, the rescue procedure remains essentially the same. Spare rope should always be carried by a single rope party. If no spare ropes are available, as many members of the party as necessary will have to unrope to provide sufficient rope to reach the fallen man. The simplest and quickest procedure is to lower the loose end of this rope until he can reach it; it then is securely belayed on the surface. While he is being pulled up he pulls himself up on the anchored rope. His progress is aided by the rescuers taking up the body line. Wherever possible, the party or parties following should move up to assist in rescue operations.

e. An alternate procedure is to tie a nonslipping stirrup at the end of the rope and let it down to the fallen man (fig. 78). He passes it inside his body loop, and down to a level where he can place one foot in the stirrup and stand erect. By slackening

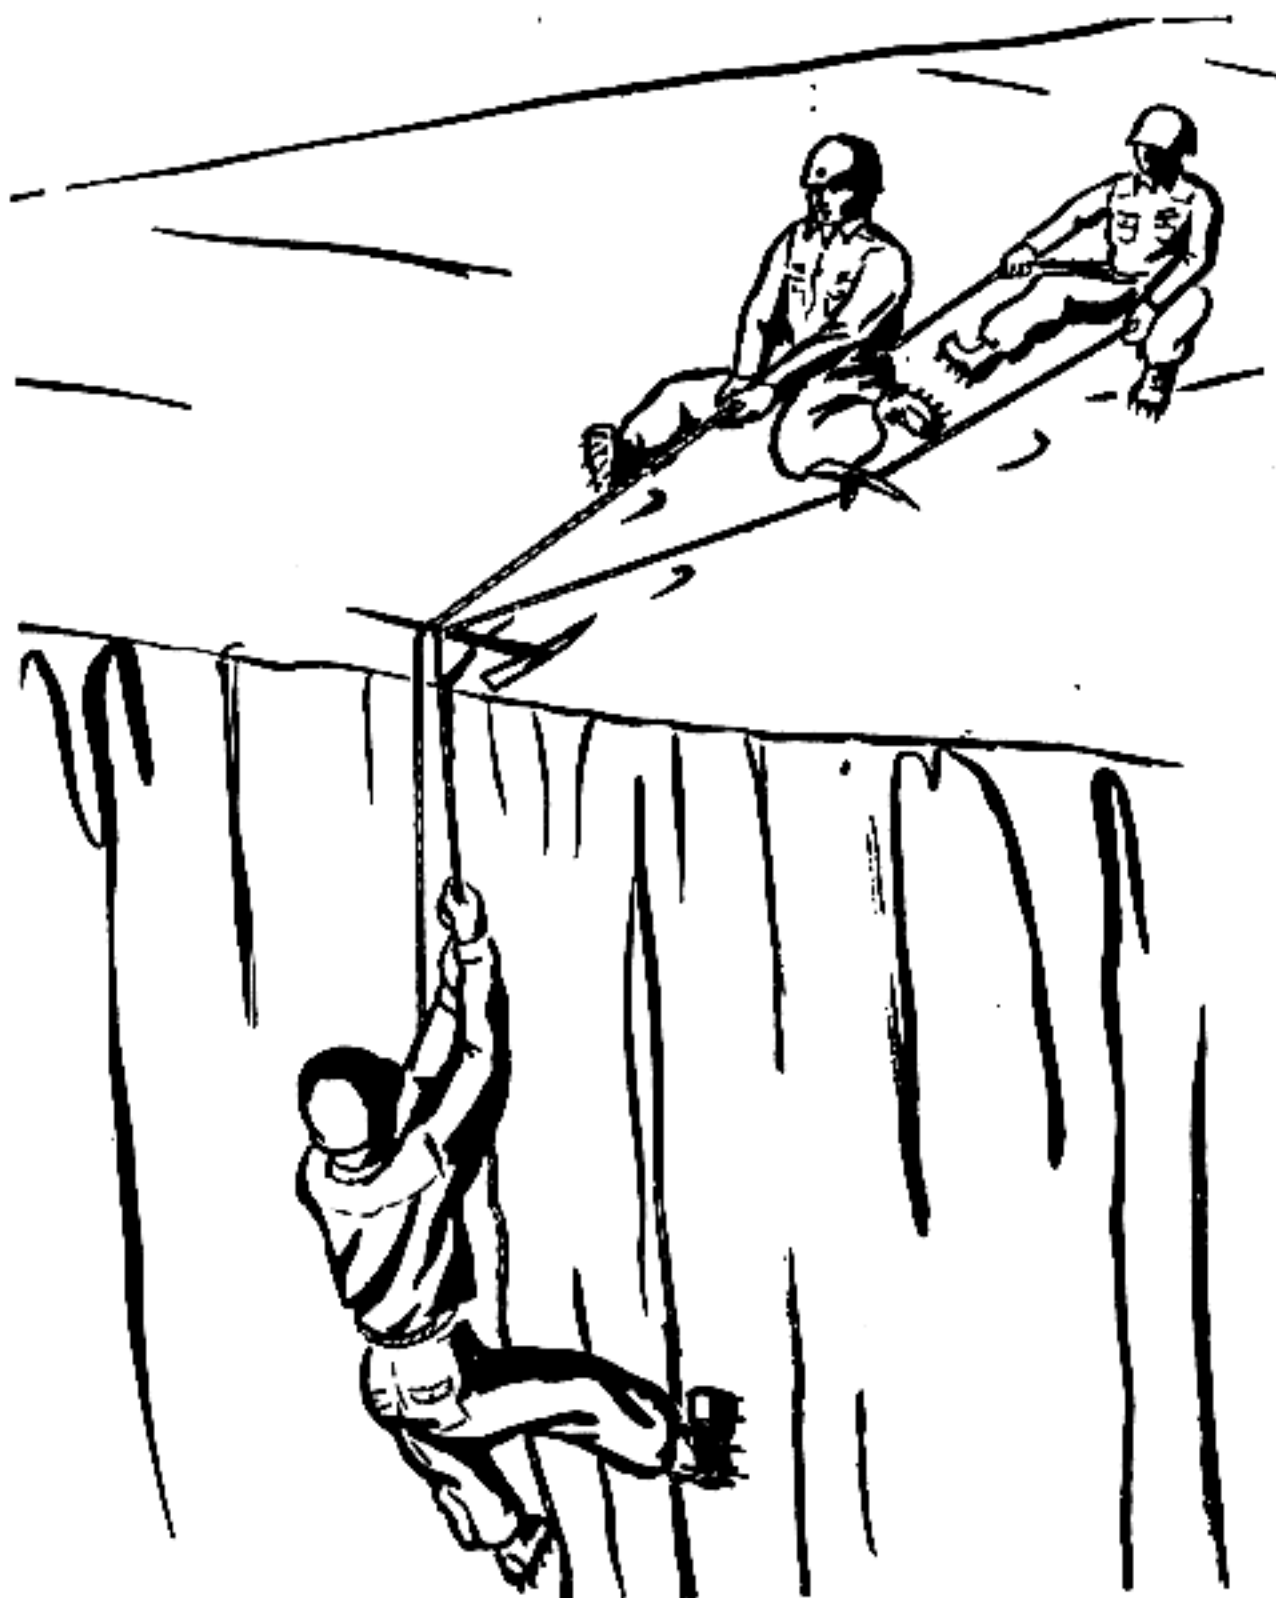


Figure 77. Ascending from crevasse on a fixed rope.

the body line in this way, it can be taken in and made fast by the belayer. The fallen man then places his weight on the body line while the foot loop is raised from above and held fast. An upward step is thereby provided for him. By a repetition of these operations, he approaches the lip of the crevasse. If an overhang is encountered here, the best procedure is for him to grasp the fixed rope, place both feet against the snow or ice of the crevasse wall and "walk" out over the overhanging snow while the slack on the body line is taken in and belayed from above.

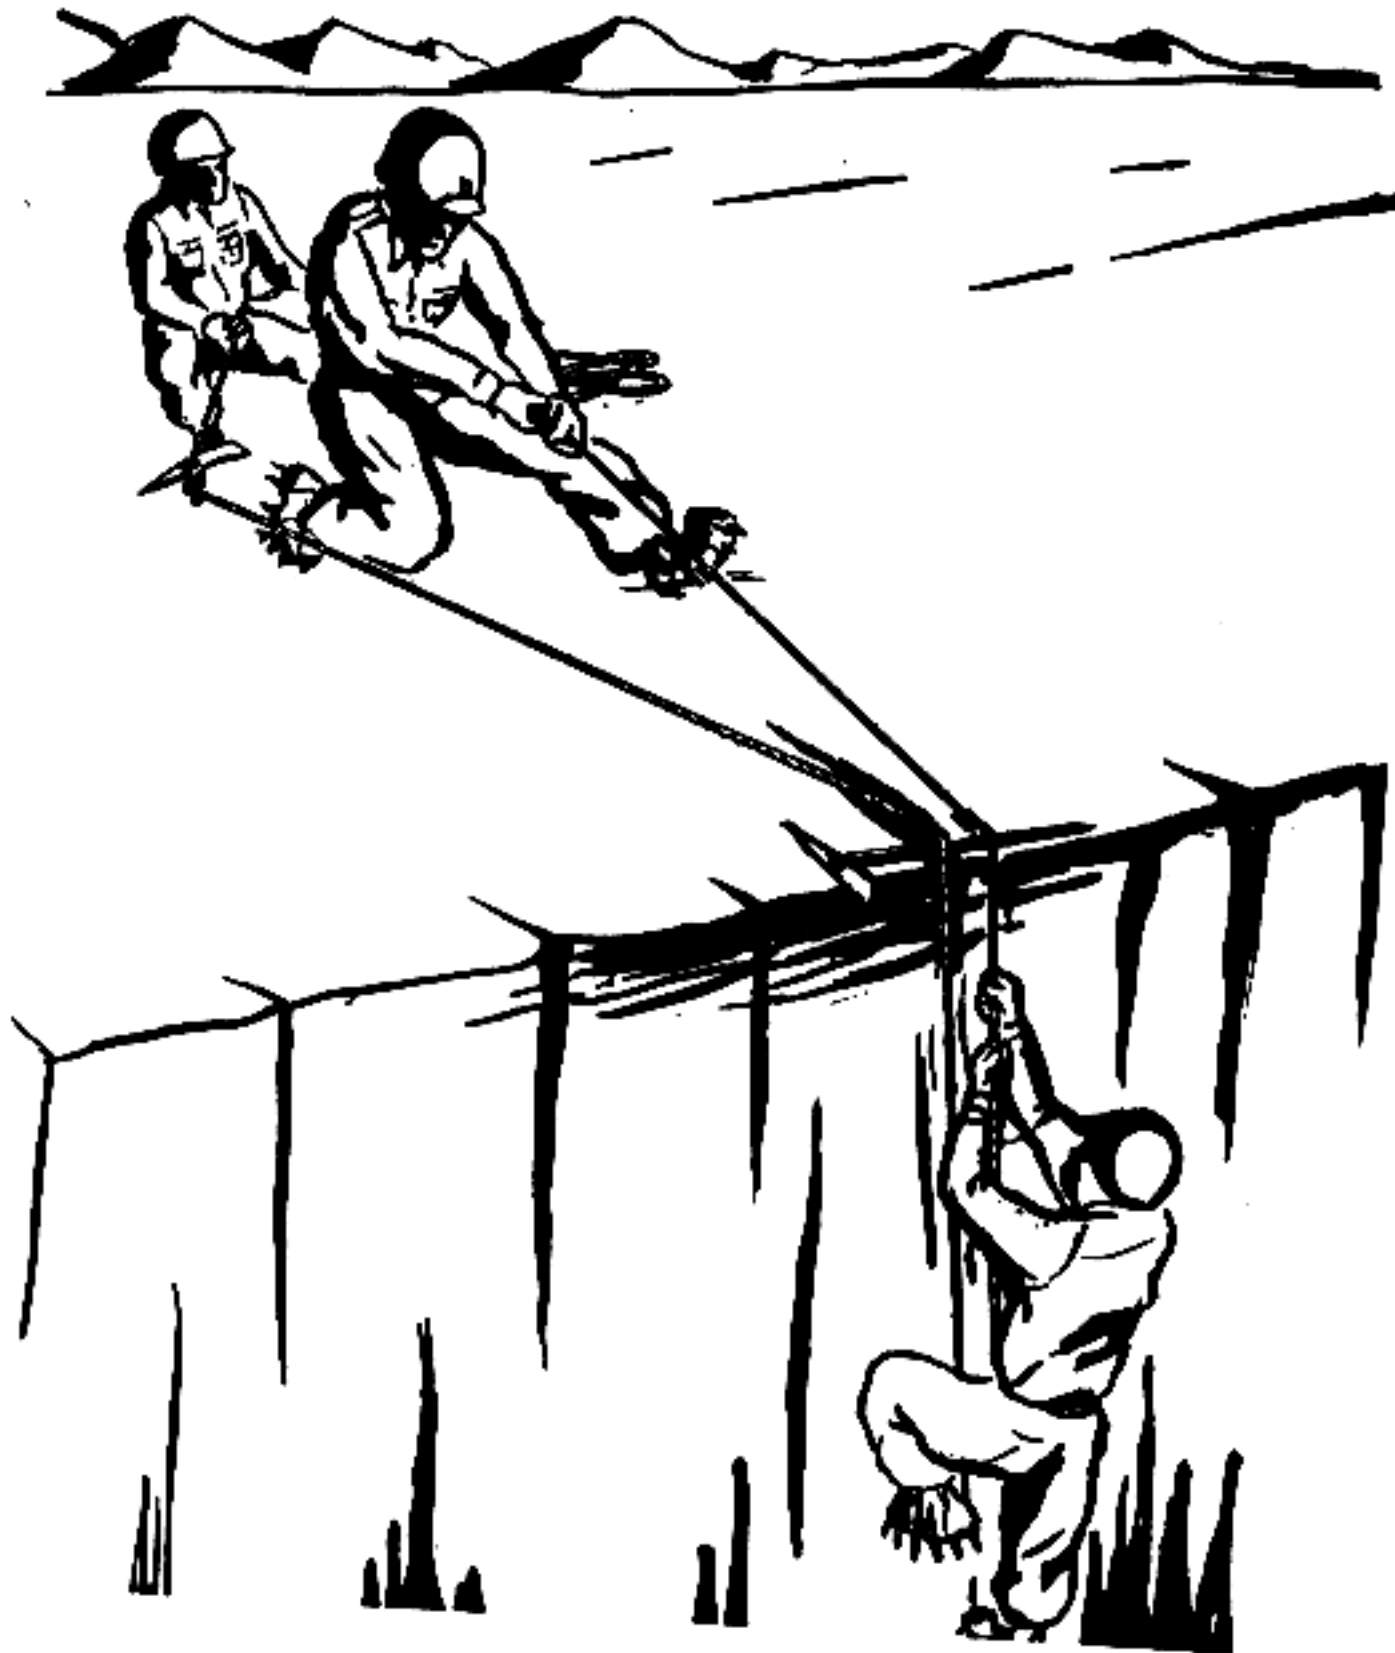


Figure 78. Ascending from crevasse by means of foot on fixed rope.

f. If the suspended climber is injured or unconscious and unable to help in his own rescue, additional assistance by one or more rope parties is then needed to recover the victim promptly. One man is lowered into the crevasse to help the victim. To insure free movement and unnecessary strain on the lowered climber a three-loop bowline knot is used. Two loops are made larger and one is passed over each leg, while the third and smaller loop is placed around his chest. To facilitate recovery operations and for additional safety, it is advisable to secure him with an additional section of a climbing rope. As this climber is lowered, another rope which is also provided with a three-loop bowline

knot is passed down to him. The victim is tied to this rope by the rescuer in the same way. The rescuer helps the victim as both men are then pulled out of the crevasse by the belayers above. If feasible it will facilitate the recovery of the two climbers if the second rope securing the victim or the rescuer in the crevasse is managed from the opposite side of the crevasse where the necessary belayers take up their positions in advance. In this manner victim and rescuer are pulled free from the crevasse wall and as they reach the top of the crevasse the ropes on one side are slowly slacked off while both men are pulled over the opposite crevasse edge.

- (1) When additional assistance cannot be secured, rescue operations are more difficult and actions taken depend mainly upon the circumstances. They must be made in the best interest of the injured man. It is most important that he is relieved from his suspended position as soon as possible.
- (2) If the victim is injured so that he cannot use either leg in the stirrup method described in *e* above, the loop of the lowered rope section is then made sufficiently large to be passed by the victim over his shoulders and around his chest. Secured in this manner he is then pulled up by both belayers. When the victim is unable to move or is unconscious, possibilities of lowering him to a firm snow bridge or shelf immediately below him are investigated by the second belayer while he is secured by the other climber. This possibility is only of advantage when additional help can be secured within a reasonable amount of time and the victim rescued. Prolonged exposure in such environment is prone to cause frostbite and shock in a relatively short period of time. If this procedure is not practicable the victim is pulled cautiously by both belayers out of the crevasse. An attempt should first be made to lower a rope section with a large loop and pass it around the upper part of the victim's body in an effort to keep him in an upright position and for additional safety.

g. Usually a leader who has been extricated from a suspended fall should not be permitted to resume immediately the responsibility of route selection. A free fall of only a few feet and the resulting rescue operations are a severe strain on a man.

h. Should it become necessary for a roped two-man party to traverse a glaciated area, each man should have in his possession, and readily available, three Prusik slings of about ten feet in

circumference, and strongly spliced at the join. If one man falls into a crevasse and is belayed by his companions, he affixes these slings with Prusik knots to the climbing rope above his head. The loose ends of two slings are passed down through the waist loop, and the man then steps with both feet onto the slings. The third sling is placed around his body. By weighting one foot, he relaxes the other sling permitting the knot to be pushed farther up the rope. Thus, by alternate action with each sling, and by pushing the waist loop knot even higher, the man extricates himself from the crevasse.

CHAPTER 6

COMMUNICATIONS

Section I. USE OF WIRE AND RADIO

178. General

In mountainous country a commander must give signal communications high priority in his planning and supervision. In most instances, communications can be maintained by TOE communication equipment supplemented with additional allowances of radios for establishing radio relays, and lamps and flags for visual signaling. For information on communications see FM's 7-10, 7-21, 7-24, 11-8, 11-10, 24-5, 24-18, and 24-20.

179. Wire

a. Wire communication is a very dependable means of communication and can be used to great advantage in mountainous areas. There will be encountered, however, problems in installing wire communication systems due to the terrain over which the wire lines must be laid. The installation of a wire system in mountainous areas requires careful planning and installation in order to insure that the wire is protected from avalanches, rock falls, landslides, severe storms, and deep snow. Because of the uncertainty of radio communication, it is important that the wire system function continuously during displacements, as well as during static situations.

b. Wire may be laid using vehicles of various types; however, the $\frac{1}{4}$ -ton truck is more adaptable to use on narrow and somewhat limited trails that may be encountered. If vehicles cannot be used it may be possible to lay wire lines from reel units RL-39 or MX-306 dispensers attached to packboards. If areas are encountered where it is not possible to lay wire from either vehicular mounted equipment or equipment mounted on packboards it may be possible to utilize aircraft, either fixed or rotary wing. If aircraft are used consideration should be given to the capability of the enemy to deliver fire against such aircraft. Kits are available for use in conjunction with aircraft in situations that require them.

c. Particular care should be exercised in the selection of routes over which wire lines are to be laid. If possible, avoid roads that

are being used as main routes of march. Roads and trails should be used as guides only; the wire should be laid at least 5 feet off. Where no trails exist, wire should be laid over the less accessible routes. This is to prevent troops from using the wire as a guide and consequently breaking it. With practice, wire teams can climb an easy route and swing the wire over an extremely difficult one. If a route becomes impassable due to chasms, etc., the gaps may be crossed by using the rifle grenade or rocket launcher methods of projecting the wire. If these methods are not successful the wire team may have to be assisted by either fixed or rotary wing aircraft.

d. In an attack wire should be laid, when practicable, immediately to the rear of the attacking echelons of each rifle company. This is accomplished by using wire-carrying parties equipped with dispensers mounted on packboards with a field telephone or a sound powered telephone attached to the wire. This affords continuous communication while the wire is being laid, thereby enabling the company commander to contact the battle group command post as necessary or at prearranged intervals. The wire carrying party should stay with the company commander at all times so that telephone communication is immediately available to him. When objectives are secured, lateral lines may be laid between companies.

e. In using wire, care must be exercised in handling and laying in order to minimize breakage and damage due to abrasion. On steep slopes, wire should be tied and tagged frequently to prevent interruption and simplify maintenance. Shorts may occur frequently, due to high winds, and they may be found at points where the wire is tied in. A solution to this problem is to lay two separate wire lines as conductors for one circuit, several feet apart and then tie or peg down each line at regular intervals. This allows more conductors thereby increasing the transmission range and reducing the possibility of interruption of the circuit due to trouble on the line.

f. It may be possible to make one trunk line serve a number of units by installing a switchboard at the termination point and laying lines to the units to be served by the switchboard.

g. The use of teletypewriter service is not limited by mountainous terrain, and should be utilized as frequently as possible. The equipment is portable and may sometimes function on a circuit not suitable for telephone communication. Streams can frequently be used to ground teletypewriter circuits.

180. Radio

a. Radio communications are frequently interrupted because

of mountain or tree masses. High frequency sets using the sky-wave mode of transmission are best for mountain communication. The use of a relay set on the top of the mask will aid high frequency sets in crossing these masks. Artillery liaison and forward observer radios should be packed on packboards, so that when it is necessary to move across country, time will not be lost in packing them. The satisfactory operation of radios in this type of terrain will depend, to a great extent, on the resourcefulness and perseverance of the operators. The use of half-wave antennas at the proper height above ground and oriented to utilize the directional characteristics will also be of value.

b. As a general rule VHF (very high frequency) radios (tactical FM (frequency modulation) radio sets in the frequency band 20 to 50 megacycles and higher) require a line-of-sight path between transmitter and the distant receiver for best results. Therefore increased ranges and reliability can be achieved if both terminals of a radio circuit are located just below the crest of a mountain peak. In the event that unavoidable intervening masks exist between the terminals it may be necessary to rely upon an intermediate radio relay station. If the transmitter and/or the receiver and its antenna is imbedded in a deep ravine or gully or in a mass of humid, leafy woods, reduced strength of signals will result. Radio sets sited inside of rock tunnels become shielded and frequently can neither send nor receive. In situations where radio communications should normally be possible but difficulties develop, shifting the location of the set only a few feet will often improve VHF transmission and reception.

c. Caution should be exercised in placing antennas in mountainous terrain to obtain line-of-sight transmission. Antennas must be so located as to avoid intervening land masks and yet so located that the antennas are not readily observed by air or ground observers. Antennas should not be placed on the crests of hills or mountains unless absolutely required to obtain satisfactory communications.

d. The extreme and rapid changes in temperature encountered in mountains create a problem in keeping radio sets and batteries dry and at an even temperature. Battery failure, moisture, and cold are the principal causes of reduced efficiency of the standard portable radio. Radio operators should carry as many extra batteries as possible. In cold weather it may be necessary to wrap the set in a moisture-proof bag and keep it in a warm place. Extra batteries can be carried in the inside pockets. On warm days the batteries should be kept out of the sun.

c. Certain of the heavier radio sets are capable of being broken down and transported by packboards. Drill in packing, unpacking, and the setting into operation of such sets must be practiced until each member of the team is thoroughly familiar with the packing of each part, and the placing of each in the proper place. This will develop speed in handling and insure against the loss of any vital part during a hurried move under difficult conditions.

f. It is often difficult to establish air-ground radio communication because of the existence of dead space caused by intervening mountain masses. Ground plane antennas often improve poor radio communications.

Section II. VISUAL SIGNALING AND USE OF MESSENGERS

181. Visual Signaling

a. Visual signaling assumes increased importance in the mountains. Long lines of sight afford many excellent opportunities for its use. Visual equipment, being light in weight, is more easily carried than other communication equipment. It can be easily improvised. Observation points are almost always available.

b. The semaphore method of visual signaling has proven very successful, being both easy to learn and usable at distances up to 4,000 yards. It is desirable for all officers, noncommissioned officers, reconnaissance and communication personnel, and messengers of units operating in mountains to be able to read and send semaphore. It has been found that its use is not confined to communication personnel only, but that any soldier may have to send, however slowly, some important messages. A soldier may often be separated by only a short distance by impassable terrain from someone with whom it is necessary to communicate. The alphabet can be learned by the average soldier in 5 or 6 hours of proper instruction. Thereafter about 20 minutes of visual signaling drill daily will keep him in practice. Utmost precision in the execution of each move should be stressed from the beginning of the instruction. Care should be exercised in selecting the background for the flags, and in achieving all possible security from enemy interception. Wigwag is slow and clumsy, but can be read over somewhat longer distances and can be sent from less exposed positions. At night a hand lamp may be used.

c. The blinker light can be read at least 1 mile in clear daylight and several miles on clear nights. Radio operators should use the standard procedure in sending messages by blinker; pre-arranged message codes can be flashed by an operator who does

not know the international code. Signal lamp equipment or flashlights may be used to send international code or prearranged message codes.

d. Lamps and flags for visual signaling purposes may have to be improvised or procured as additional equipment. If no standard equipment is available, strips of cloth tied toward the outer end of sticks of wood or bayonets will serve for flags. For short ranges, when the use of flags would be unduly conspicuous, the waving of hands, arms, or handkerchiefs may be used.

e. Under favorable conditions, the sun's rays can be caught and reflected by means of a mirror on heliograph device and used to transmit messages. Pyrotechnic devices can be used in the mountains as in normal terrain to send prearranged messages requiring immediate action or when other means of signal communication are uncertain or too slow. In order to insure transmission through mountain fog and clouds, it may be necessary to set up a chain of stations to relay pyrotechnic signals. Smoke signals can be used to attract attention, or as a substitute for pyrotechnic devices. Panels are used in the mountains as in the flatlands, although difficulty may be experienced in finding a suitable panel display ground.

f. Because observers must be well forward and wire is limited, infantry heavy weapons personnel must often depend on visual signaling. In the commander's plans for coordinating supporting fires, he must provide for the use of visual signaling to complement other means.

182. Messengers

a. Messengers are necessarily slow in the mountains and require intensive training to become dependable. In rough heavily wooded country, $\frac{1}{2}$ mile per hour is considered fair speed. Even a trained messenger with a map can become lost in the daytime. When visibility is poor, a messenger may find his way to a command post by following existing wire lines, however, messengers should not pick up wire lines for use as a guide.

b. Messengers should be dispatched in pairs and should be taught to depend on natural terrain features for orientation, rather than relying too much on roads and other manmade landmarks in finding their routes. When in a new position, messengers should be sent to the command post prior to darkness to find the route. Since darkness will change the appearance of the trail, messengers should backtrack after dark in order to familiarize themselves with landmarks in darkness. When operating in snow covered terrain, all messengers should be proficient skiers.

CHAPTER 7

TRAINING

Section I. MILITARY MOUNTAINEERING

183. General

A carefully integrated, organized, and staffed military mountaineering school is the best means for developing expert military mountaineers. Training should be continuous and uninterrupted for best results. See appendix II for suggested training program.

184. Selection of Students

a. Enlisted Men. Students should be volunteers who understand what they are undertaking.

b. Officers. In the selection of officer students, mental traits should receive prior consideration. Steadiness and the ability to improvise are the most important; intelligence and physical endurance are only slightly less important.

185. Instructors

a. Selection. In addition to meeting the qualifications of prospective students, instructors should be able to explain clearly and demonstrate precisely both theory and practice when handicapped by lack of uniform instruction areas. Senior instructors should be personnel who have had vast experience as mountain climbers in civilian and/or military life.

b. Training.

- (1) Instructors should be given a course closely resembling but in more detail than that given to students, plus classes in military methods of instruction.
- (2) Training may be considered complete only when a candidate cannot only do, but also can explain clearly every operation he has been taught.
- (3) Care should be taken to acquaint instructor classes with varied rock terrain to include all areas in which he will teach.
- (4) Safety precautions must be stressed. Avoidance of accidents depends largely on the instructor's understanding of their causes, and the enforcement of safety precautions.

c. Duties. The instructor is responsible for the safety and training of his class and the proper care of the equipment. Students should be graded on ability to perform required operations, understanding of subject matter, and special leadership or instructional ability. Continued unsatisfactory grades should result in the rejection of the student receiving them.

186. Supervisors

The supervisor oversees the conduct of training. He should—

- a.* Be an experienced and expert mountain climber.
- b.* Make sure that safety precautions are not being overlooked.
- c.* Correct errors of techniques and instruction.
- d.* See that grades and other necessary records are maintained properly.
- e.* Act on all complaints and suggestions personally if possible, or refer complaints to proper authority.
- f.* Solicit suggestions for improvement of training from instructors and students.
- g.* Assign areas fairly and insure that classes do not endanger or interfere with each other.
- h.* Encourage interchange of areas by instructors, and encourage regular exchanges of areas with other supervisors.
- i.* Acquaint himself with, and constantly seek to develop, improved techniques and training methods.
- j.* Organize; be prepared to present demonstrations.

187. Class Organization

The following organization is suggested:

- a.* The company, under the chief instructor, is grouped into an even number of groups.
- b.* Classes of approximately 6 men are grouped into platoons under the control of the platoon supervisor and his assistant. Size of platoons is governed by the limiting effect of terrain on control. Platoon size should not normally exceed 12 classes. Platoons should be kept intact so far as circumstances permit.
- c.* The basic class contains 6 men. At the beginning, classes may contain 10 men. Individual soldiers should be grouped according to organization. Officers should be grouped according to component and organization. No class should contain both officers and enlisted men until the climbing exercise phase of instruction.

188. Training Aids

- a. General.* Training aids should be used to supplement practical work, but not as a substitute for it.

b. Training Films. Training films and film strips should be used primarily for orientation. In the absence of appropriate films, conference supplemented by charts are an adequate expedient.

c. Belay Tower.

- (1) *Function.* Cliffs suitable for safe holding of severe practice falls may seldom be available. The belay tower (fig. 79) will accommodate six classes, two ropes being used concurrently on each face.

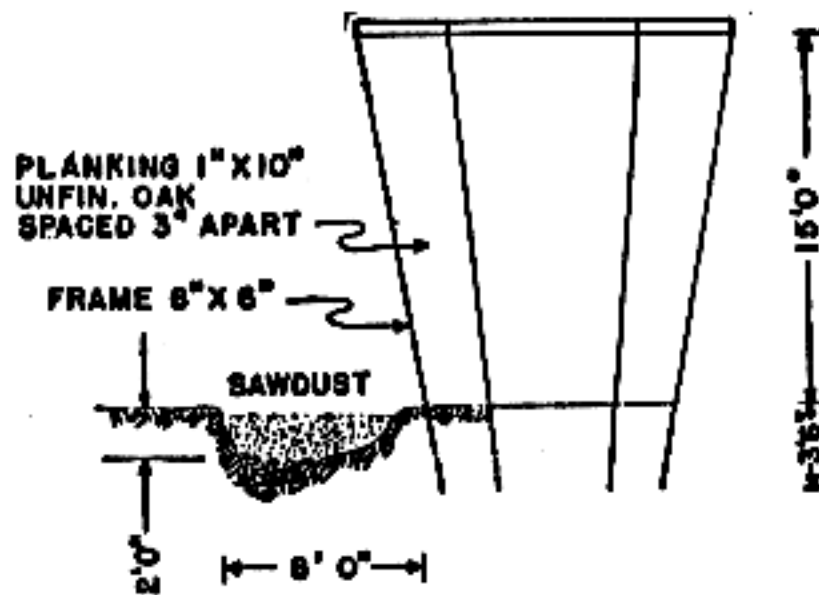
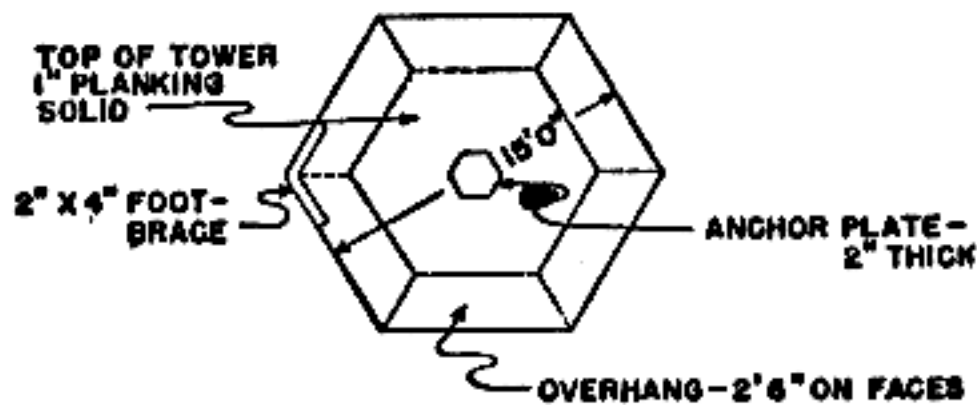


Figure 79. Belay tower.

- (2) *Number.* Enough belay towers should be built to accommodate one-third of all classes at one time.
- (3) *Employment.*
- (a) Faller ties into end of climbing rope with bowline on a coil under buttocks. Number of loops on coil is changed periodically to distribute wear on rope.
 - (b) Belayer ties in on end of ropes using bowline, assumes desired position, and anchors with bight of climbing rope to eyebolt in anchor plate.

- (c) Instructor takes position on top of tower between belayers where he can see fallers and belayers.
- (d) Practice falls progress in severity until the belayer holds, to the instructor's satisfaction, falls of 4 feet (measured by the amount of slack accumulated by the faller prior to his fall) for sitting and standing position.
- (e) Faller and belayer change over and procedure is repeated until entire class has received instruction.
- (f) Unoccupied students may learn rope signals while rehearsing rope management for slow-motion, simulated falls.
- (g) Rope signals will be used throughout practice fall instruction excepting as a warning for falling which will be "Fall."
- (h) The training company is divided into two groups, each using the belay tower and vicinity for 1/2 day.
- (i) Each group is divided into three smaller groups, two of which may practice falls at one time. The third group receives instruction in knot tying. Knot tying groups change every 80 minutes.

d. *Log Ramp* (fig. 80).

- (1) *Construction.* A wall substitute may also be constructed from logs and rough lumber. This wall is built of peeled logs, 10 to 12 inches in diameter and about 30 feet long, placed vertically against a gravel bank, or braced to stand at an angle of 75° from the horizontal. A high ramp of logs at an angle of 45° is valuable for basic climbing. Two separate climbing routes are laid out with cross-overs to permit traversing at several points. Hand and footholds outlining the routes are chiseled. Some of the holds should be cut to slope down and out, and others should be vertical to provide cross pressure for hands and feet. A fingertip traverse, having handholds but not footholds, is desirable for strengthening the hands.
- (2) *Use.* Pitons, bolts, or piping may be inserted for belays and climbing. Belayers can snap into these by using a rope sling and leaning out from the logs. Tapered wood blocks should be placed above pitons to prevent the climber from hitting the projecting pitons in case of falls.

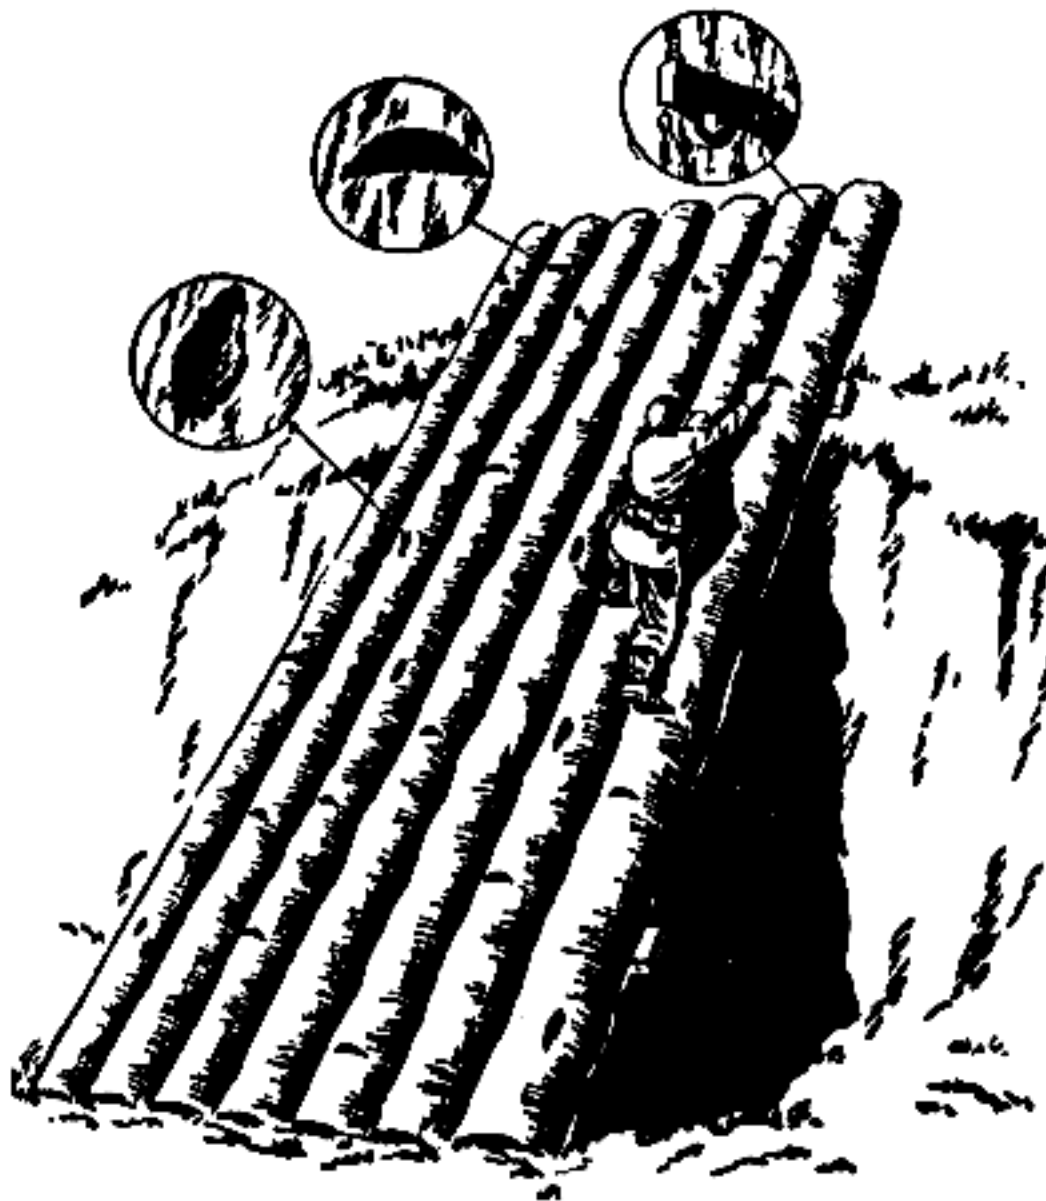


Figure 80. Log ramp as training aid.

Section II. UNIT TRAINING

189. Purpose

The function of unit training is to—

- a. Familiarize unit commanders with military mountaineering.
- b. Achieve coordination between climber teams and their units.
- c. Recondition climbers who have long been absent from mountain terrain.
- d. Provide necessary training for personnel who are not being trained as expert mountaineers.

190. Method of Training

a. *Orientation.* Troops and unit commanders can be orientated by means of a 1-day familiarization course, to include explanation and demonstration of all major phases of training. The demonstration may be spectacular, to hold audience interest, but it should not misrepresent either the skills or the proper employment of the climber.

b. Practical Work. Unit personnel should practice—

- (1) Balance climbing on low pitches with safe landing spot.
- (2) Hauling lines; students should be encouraged to haul each other up and down.
- (3) Handling fixed ropes on a moderately difficult route calculated to increase respect for trained military mountaineers. This, and other phases of practical work, should be under the supervision of instructors and trained unit climbers.

c. Coordination. Having received training in military mountaineering, climbers of units should, in unit problems and maneuvers, be given the opportunity to demonstrate and develop their skill as climbers and their value to their unit when used as such.

d. Conditioning.

- (1) Troops who are not accustomed to operating in mountain terrain or who have not done so for a long time will lose most of the benefits of specialized training if they are not in strong physical condition. Steep, rocky terrain, gravel pits, quarries, log ramps, rappel towers, and cross-country marches with natural and artificial obstacles, are excellent conditioners.
- (2) Every man must receive training in the use of fixed ropes.
- (3) One company in 4 consecutive weeks, training twice a week on the course described below, can acquire the necessary proficiency. The company can be put over the course in 20 minutes. The course should include—
 - (a) A 40-foot suspension traverse between trees, poles, or rocks.
 - (b) A hand-over-hand rope climb ascending a low angle log ramp where feet and legs, and not the hands, are used to lift the body.
 - (c) Descent of low angle slope where a hand-over-hand climb down, or rappel, can be accomplished.
- (4) Properly conducted mountain marches emphasizing proper pace, breathing, and technique of movement are valuable.

e. Climbing Instructors. Climbers may be used as instructors in mountain marching and over normally broken terrain. They should be allowed to practice mountaineering under the supervision of the company mountaineering officer.

Section III. EXERCISES IN CLIMBING

191. General

a. Purpose. Exercises outlined in this section are only suggestions and may require revision to suit them to existing terrain. They should be short, vigorously executed, and provide climbing action for all participating students. When action stops, students lose interest.

b. Instructors. All instructors charged with the duty of observation and criticism should be thoroughly familiar with the purpose and method of the exercise, as well as all climbing techniques and tactics concerned. They should make suggestions necessary for safety or to supplement data omitted from previous training of the students.

c. Orientation. Orientation of students with all phases of the exercise should precede the problem. Instructors who are charged with the responsibility of moving untrained troops during exercises should be cautioned against the possible reactions when untrained men are exposed to height and rock fall.

d. Critique. The critique should be held in view of the terrain used in the exercise. As a basis for the critique, errors commonly committed in each exercise should be discussed, and the students should be commended for absence of errors as well as criticized for the errors committed.

192. Mountain Walking Course

a. Purpose. To indicate proper technique in travel through various terrain types and obstacles.

b. Method.

- (1) The course should be laid out to include an ascent and descent of about 500 feet in $\frac{1}{2}$ mile, passing over or through large and small talus, steep grassy slopes, woods, ledges, easy chimney, down timber, and scree.
- (2) The student travels the course as part of a column of squads under squad control. He is given no coaching ahead of time, but is allowed to use his own judgment.
- (3) Instructors should be posted at various obstacles along the course to observe proper and improper technique. They should make notes if necessary, and prepare to take part in the critique.

c. Common Errors and Corrective Action.

- (1) *Talus.* Too much use of hands for balance; poor rhythm in pace, with stops and starts from rock to rock; and stepping too far and too high. The routes should be

selected several steps ahead, and the climber should move with a confident rhythmic stride. Silent movement is desirable.

- (2) *Steep grass slopes.* Failure to use uphill side of clumps for steps; selection of too steep a route; and leaning into the hill.
- (3) *Woods.* Tendency on steep slopes to grasp small trees for support, thus shaking tree crown and disclosing position; branches whipped in faces of others. Trees should be grasped at base, low enough to eliminate quiver. Branches should be pushed over the head and backward.
- (4) *Ledges.* Tendency to walk toward inside, where projections may throw soldier off balance and where footholds are often poorer; tendency to lean in for protection. The climber should choose a route free from cliffs on uphill side, remain upright in posture, taking care not to step on small gravel that might roll underfoot.
- (5) *Easy chimney.* Usually such an obstacle becomes a bottleneck, and delays entire column. Several routes should be taken over bottleneck to designated assembly point.
- (6) *Down timber.* Entire body raised in stepping over log, loose bark on slippery surface used for foothold. The climber should walk around obstacles if they are at all difficult; step over it rather than upon it, leading with the uphill foot; if stepping upon it, he should not raise the entire body.
- (7) *Scree.* Not enough care in selecting footholds with best support on ascents; leaning back on descents; failure to kick and jack a step properly in traverse to prevent sliding; failure to follow in packed footprints of man ahead.
- (8) *Pace.* Too fast. Proper cadence on long steep marches may vary from 75 down to 40 and lower. Under heavy load, in high altitude, on 3,000- to 4,000-foot climbs or at night, the rest step may be used (short pause after each step).
- (9) *Distance.* Neither great enough nor properly used; excessive accordion action in column, with many starts and stops. With correct distance of 5 feet between men, 10 to 20 yards between squads, 30 to 50 yards between platoons, and with this distance slowly taken up or let out as the terrain requires, no man should have to stop anywhere on the course. Unit leader must anticipate closing

of the gap between units, and shorten and slow his pace to delay or prevent closing of the gap.

- (10) *Route.* Too steep, or failing to make good use of best footing. Route should be no steeper than permits walking with foot flat on slope rather than on toes. Lead man should select his footing carefully; others should follow in his footsteps.

193. Training of Company Assault Climbers in Attack

(par. 78)

a. Purpose. To indicate correct procedure for the company assault team in attack of a steep rock obstacle.

b. Method.

- (1) *Obstacle.* A 100- to 200-foot cliff.
- (2) *Situation.* Because of apparent inaccessibility of cliff, top of cliff is held very lightly. No recent enemy action has been observed.
- (3) *Student team.* Six men with basic weapons and appropriate climbing equipment will—
 - (a) Make a visual reconnaissance of the cliff.
 - (b) Give an estimate of the time necessary to establish two fixed ropes up it.
 - (c) Make a plan of attack.
- (4) *Instructor.* Issues fragmentary field order covering situation and hour of attack. He observes all phases of preparation and execution and prepares a critique with the aid of an observer on top of the cliff.

c. Common Errors.

- (1) Lack of previous planning; estimate of time and equipment wrong or lacking.
- (2) Poor reconnaissance; failure of reconnaissance to disclose best route; noisy reconnaissance.
- (3) Improper placing of fixed rope; operation noisy; pitons poorly placed; rope tied in poorly; poor route selected; security not established at top of cliff; inadequate organization.

194. Equipment Movement Course

a. Purpose. To indicate possible procedures for the movement of an 81-mm mortar over various types of terrain and obstacles.

b. Method.

- (1) *Course.* The course should include—
 - (a) The ascent of a cliff 35 to 45 feet high, a cliff 65 to 90 feet high, and a steep talus slope over 150 feet long.

- (b) The descent of a steep rock or dirt slope of 40° to 45°.
 - (c) The crossing of a gap, such as a steep walled ravine, or between a pinnacle and the main rock face.
 - (d) The descent of a 40- to 60-foot vertical rock face.
- (2) *Student team.* Two men with equipment they have selected after ground reconnaissance, are charged with responsibility of the movement of an 81-mm mortar section over the prescribed course.
 - (3) *Instructors.* They are posted at each obstacle. They observe the solution of each problem by the student, and help prepare and assist in delivering a critique.

c. Common Errors.

- (1) Faulty estimate of equipment needed.
- (2) Best hauling line not used; lines not in best location.
- (3) Insufficient use of mortar crews to assist in movement of weapons.
- (4) Improperly tied knots or cinches; poorly anchored lines; failure to observe common-sense precautions.
- (5) Failure to exercise proper care to avoid damaging weapons.

195. Establishing Observation and Sniper Posts

a. Purpose. To test individual climber's and two-man climbing team's ability to overcome difficult terrain obstacles quickly and silently in reaching designated positions.

b. Method.

- (1) *Obstacle.* A face, ridge, chimney, or pinnacle, (route boundaries may have to be defined) which will test the climbing team's or climber's ability. Probable direction of enemy designated.
- (2) *Team.* Single climbers should not be used if climbing is exposed or difficult. The two-man team or combinations of two-man teams are ideal. Climbers armed with basic weapon proceed after visual reconnaissance to cliff and climb to designated position, using all possible cover and concealment. Climbers take up concealed positions and record presence of objects or persons visible using methods outlined in FM 21-75.
- (3) *Instructor.* He observes and records the actions of the climbers from designated enemy position; helps prepare and may deliver a critique.

c. Common Errors.

- (1) Failure to make adequate reconnaissance.

- (2) Failure to select easiest covered route or covered position.
- (3) Failure to maintain tactical silence.
- (4) Unnecessarily slow climbing; poor rope management, causing rocks to fall.

196. Scouts

a. Purpose. To test the ability of individual climbers, or of two-man climber teams to select a suitable line of march over broken and steep terrain; to recognize those portions of the line of march which will require special aids; to recognize common dangers.

b. Method.

- (1) *Course.* To include an ascent and descent of at least 1,000 feet, and at least 1 horizontal mile in length; broken and steep terrain, rock cliffs and other terrain obstacles; a wide selection of routes.
- (2) *Student.* Equipped with basic weapon, compass, map, notebook, pencil, and climbing equipment, the scout team will proceed from the starting point (indicated on map) toward a designated objective. He will choose the best possible line of march, recognizing the special aids his unit will have to employ in following him. He will make a sketch and make notes of obstacles and danger areas, such as those subject to rock fall from natural and artificial causes. Where terrain bottlenecks occur, he will reconnoiter them and adjacent terrain for alternate routes.
- (3) *Instructor.* He accompanies scout(s), observing and recording mistakes. He assists in preparing and may help to deliver a critique.

c. Common Errors.

- (1) Failure to make successive visual reconnaissance from commanding terrain features encountered in line of march.
- (2) Poor choice of route; failure to go around, rather than over prominent terrain obstacles; failure to avoid terrain features most subject to enemy observation or swept by rock fall.
- (3) Failure to reach designated point.
- (4) Failure to record obstacles encountered and alternate routes as required.

197. Scouting and Patrolling by Night

a. Purpose. To demonstrate the ability of the patrol to apply

the principles of night scouting and patrolling (FM 21-75) to military mountaineering.

b. Method.

- (1) *Course.* Laid out to include walking on leaf-covered slopes, talus, moderately difficult climbing, easy scrambling, setting up and use of rappel. Difficult climbing should be low (not higher than 12 feet above a good landing spot) and should not exceed a 70° angle.
- (2) *Student.* Single climbers or groups, equipped with a climbing rope, travel course, maintaining tactical silence and light discipline.
- (3) *Instructor.* Instructors are posted at frequent intervals along the course. They listen for unnecessary noises and direct patrol from station to station; prepare comments for use in the critique.

c. Common Errors.

- (1) Rolling or kicking rocks, causing them to fall. This error can be corrected by keeping weight over feet, and by moving carefully with special attention to how the rear foot is raised.
- (2) Shaking trees and branches, disclosing position.
- (3) Failure to rappel carefully so that rocks are not knocked loose.
- (4) Failure to avoid sky-lining.

198. Combat Patrol

a. Purpose. To give the climber team and attached elements practice in functioning as a climber combat patrol.

b. Practical Work. A tactical problem, in which the climber combat patrol, under control of the company mountaineering officer is called upon to eliminate an enemy combat outpost on dominant and precipitous terrain. For the problem a suitable terrain feature is selected, and a situation and fragmentary attack order are given.

- (1) Terrain obstacles are a cliff or spur 50 to 200 feet high, and a talus approach of more than 100 feet.
- (2) The situation is tactical. Enemy position is held by a light machinegun section and mortar section with rifle security, at a distance of 1,500 yards from friendly forward elements.
- (3) The patrol leader is informed of situation and given attack order at H-3 hours. He makes a visual reconnaissance, forms a plan of attack, and briefs his element and climber teams.

- (4) The mountaineering noncommissioned officer divides climbers into two units of two men each, and procures necessary climbing equipment, rations, weapons, and ammunition for climbers.
- (5) The patrol leader divides his patrol into two main elements—the assault element and security element—and attaches a climbing team to each. He draws necessary ammunition and rations.
- (6) Combat patrol crosses line of departure at H-hour and attack continues according to plan.
- (7) Instructors acting as observers accompany the patrol and are stationed with enemy detail on the objective. They record their observations and assist in preparing and delivering critique.

c. Common Errors.

- (1) Failure to organize an attack effectively or procure necessary equipment.
- (2) Assault teams are not coordinated well with the security element.
- (3) Climbers do not attack aggressively.
- (4) Climbers warn enemy of their presence prematurely by shouting or dislodging rocks.
- (5) Climbers do not choose best routes; are stopped unnecessarily by difficulty or enemy fire through failure to use covered approach.

APPENDIX I

REFERENCES

AR 220-50	Field Organizations: Regiments—General Provisions.
AR 220-60	Field Organizations: Battalions—Battle Groups—Squadrons—General Provisions.
AR 220-70	Field organizations: Companies—General Provisions.
AR 320-50	Authorized Abbreviations and Brevity Codes.
SR 320-5-1	Dictionary of United States Army Terms.
FM 1-100	Army Aviation (to be published).
FM 3-5	Chemical, Biological and Radiological Warfare.
FM 5-6	Operations of Engineer Troop Units.
FM 5-10	Routes of Communication.
FM 5-15	Field Fortifications.
FM 5-25	Explosives and Demolitions.
FM 5-31	Use and Installation of Boobytraps.
FM 6-18	Mortar Battery, Infantry Division, Battle Group.
FM 6-20	Artillery Tactics and Techniques.
FM 6-40	Field Artillery Gunnery.
FM 6-101	The Field Artillery Battalion.
FM 6-140	The Field Artillery Battery.
FM 7-10	Rifle Company, Infantry Regiment.
FM 7-24	Communication in Infantry and Airborne Divisions.
FM 7-40	Infantry Regiment.
FM 8-10	Medical Service, Theater of Operations.
FM 8-35	Transportation of the Sick and Wounded.
FM 11-8	Field Radio Relay Techniques.
FM 11-10	The Signal Battalion, Infantry Division.
FM 17-33	Tank Units, Platoon, Company, and Battalion.
FM 21-5	Military Training.
FM 21-6	Techniques of Military Instruction.
FM 21-10	Military Sanitation.
FM 21-11	First Aid for Soldiers.
FM 21-26	Map Reading.
FM 21-30	Military Symbols.
FM 21-40	Defense Against CBR Attack.
FM 21-41	Soldiers Manual for Defense Against CBR Attack.
FM 21-60	Visual Signals.

FM 21-75	Combat Training of the Individual Soldier, and Patrolling.
FM 21-76	Survival.
FM 24-5	Signal Communications.
FM 24-18	Field Radio Techniques.
FM 24-20	Field Wire Techniques.
FM 30-5	Combat Intelligence.
FM 30-7	Combat Intelligence, Battle Group, Combat Command and Smaller Units.
FM 31-50	Combat in Fortified Areas and Towns.
FM 31-70	Basic Arctic Manual.
FM 31-71	Operations in the Arctic.
FM 44-1	Antiaircraft Artillery Employment.
FM 72-20	Jungle Operations.
FM 100-5	Field Service Regulations: Operations.
TM 1-260	Principles of Rotary Wing Flight.
TM 5-220	Passage of Obstacles Other Than Mine Fields.
TM 5-270	Cableways and Tramways.
TM 5-271	Light Stream-Crossing Equipment.
TM 5-279	Suspension Bridges for Mountain Warfare.
TM 5-560	Arctic Construction.
TM 10-275	Principles and Utilization of Cold Weather Clothing and Sleeping Equipment.
TM 10-708	Stove, Cooking, Gasoline, M-1950, One-Burner.
TM 10-735	Stove, Yukon, M-1950.
Pam 108-1	Index of Army Motion Pictures, Film-Strips, Slides and Phono-Recordings.
Pam 310-1	Military Publications, Index of Administrative Publications.
Pam 310-3	Military Publications, Index of Training Publications.
Pam 310-5	Military Publications, Index of Graphic Training Aids and Devices.

APPENDIX II

**MASTER TRAINING PROGRAM
MILITARY MOUNTAINEERING AND GLACIER WORK**

Item	Subject	Code ltr	Total hours	Weeks				
				1	2	3	4	5
1	Rope Management	RM	5	5	--	--	--	--
2	Manpacking	MP	1	1	--	--	--	--
3	Personal Hygiene and Sanitation	PH	1	1	--	--	--	--
4	Use and Care of Climbing Aids	CA	1	1	--	--	--	--
5	Shelters and Fires	SF	5	5	--	--	--	--
6	Preparation of Rations	PR	1	1	--	--	--	--
7	Mountain Weather	MW	1	1	--	--	--	--
8	Communications	CM	5	5	--	--	--	--
9	Maps and Compass	MC	6	2	4	--	--	--
10	Individual Mountain Movement	IM	31	7	8	8	8	--
11	Use of Rope Installations	RI	16	4	4	4	4	--
12	Assault Climbing Techniques	AC	50	4	12	12	12	10
13	Mountain Marches and Bivouacs	MM	54	--	8	16	16	14
14	Evacuation	EV	6	2	4	--	--	--
15	Glaciers	GL	14	--	--	--	--	14
16	Avalanches	AV	2	--	--	--	--	2
17	Commander's Time	CT	21	5	4	4	4	4
	TOTAL		220	44	44	44	44	44

ROPE MANAGEMENT
Subject Schedule

CODE RM
Total Periods 5

Periods	Type of instruction	Subject	References and remarks
RM 1-----	Conference and practical work-----	Types and characteristics of ropes used in mountaineering, care of ropes, proper coiling, tying off of coils, throwing and method of carrying.	
RM 2-5-----	Demonstration and practical work----	Terms used in rope work, method of GTA 5-8 tying knots used in military mountaineering, and their practical application.	

MANPACKING
Subject Schedule

CODE MP
Total Periods 1

Periods	Type of instruction	Subject	References and remarks
MP 1-----	Conference-----	Nomenclature, function and adjustment of rucksack components, and proper methods of stowing equipment.	FM 31-70, TM 10-275

PERSONAL HYGIENE AND SANITATION
Subject Schedule

CODE PH
Total Periods 1

Periods	Type of instruction	Subject	References and remarks
PH 1	Conference	Prevention and care of ailments peculiar to mountain operations. Personal cleanliness and action to preserve health under adverse conditions.	FM 21-11, FM 31-70

USE AND CARE OF CLIMBING AIDS
Subject Schedule

CODE CA
Total Periods 1

Periods	Type of instruction	Subject	References and remarks
CA 1	Conference	Familiarization with climbing rope, sling rope, pitons, snaplinks, piton hammer, leather gloves, and shoes.	

SHELTERS AND FIRES
Subject Schedule

CODE SF
Total Periods 5

Periods	Type of instruction	Subject	References and remarks
SF 1	Conference and demonstration	Use and care of 5-10 man tents, and the assembly and operation of the Yukon Stove.	FM 31-70, TM 10-735
SF 2-5	Practical work	Construction and proper use of various types of improvised shelters. Proper care and use of axe, knife, and the conservation of forest resources. Food procurement and care of the individual under unusual situations.	

PREPARATION OF RATIONS
Subject Schedule

CODE PR
Total Periods 1

Periods	Type of instruction	Subject	References and remarks
PR 1	Conference and practical work	Proper care, use, testing and repair of one burner gasoline stove. Components of field rations and their preparation under field conditions.	TM 10-708, FM 21-75, FM 31-70

MOUNTAIN WEATHER
Subject Schedule

CODE MW
Total Periods 1

Periods	Type of instruction	Subject	References and remarks
MW 1	Conference	The importance of weather in mountain operations, its general characteristics, types and prediction methods.	

COMMUNICATIONS
Subject Schedule

CODE CM
Total Periods 5

Periods	Type of instruction	Subject	References and remarks
CM 1	Conference	Wire, radio, messenger, and visual communications, and problems peculiar to their use in mountains.	TB Sig 219, FM 24-18, FM 24-20 *
CM 2-5	Practical work	Visual communications, semaphore and blinker lamps.	FM 21-60 *

* 5 additional hours to be given each succeeding week as integrated training.

MAPS AND COMPASS
Subject Schedule

CODE MC
Total Periods 6

Periods	Type of instruction	Subject	References and remarks
MC 1-6-----	Conference, demonstration, and practical work.	Review of basic map and compass reading and its application to the special problems caused by difficult terrain.	FM 21-26

INDIVIDUAL MOUNTAIN MOVEMENT
Subject Schedule

CODE IM
Total Periods 31

Periods	Type of instruction	Subject	References and remarks
IM 1-4	Demonstration and practical work	Proper techniques of placing the feet and moving the body while ascending, descending, and traversing varied mountain terrain.	
IM 5-12	Demonstration and practical work	Proper technique of using hands, feet, and body position while moving over varied mountain terrain to include rock faces and slab. Margin of safety stressed and students kept close to ground.	
IM 13-20	Demonstration and practical work	Training in the proper technique of descent with aid of rope using body, hasty, and seat type rappels.	
IM 21-28	Demonstration and practical work	Selection of best routes through mountainous areas under all conditions, and proper marking of route.	
IM 29-31	Practical work	Techniques of mountain walking, emplacement of pitons, unroped balance climbing, two-man party climbing, and methods of rappelling.	

USE OF ROPE INSTALLATIONS
Subject Schedule

CODE RI
Total Periods 16

Periods	Type of instruction	Subject	References and remarks
RI 1-4	Demonstration and practical work	Installation and use of fixed ropes and suspension traverses.	
RI 5-8	Demonstration and practical work	Installation and use of vertical hauling lines.	
RI 9-12	Demonstration and practical work	Installation and use of rope bridges.	TM 5-279
RI 13-16	Practical work	Movement over a course which requires the use of rope installations.	

ASSAULT CLIMBING TECHNIQUES
Subject Schedule

CODE AC
Total Periods 50

Periods	Type of Instruction	Subject	References and remarks
AC 1-4.....	Conference and demonstration.....	Demonstration of proper techniques in walking over various mountain terrain to include party climbing, belaying, rappelling, and use of fixed ropes.	
AC 5-8.....	Practical work.....	Proper techniques of placing the feet and moving the body while ascending, descending and traversing scree, talus, hard ground, and grassy slopes.	
AC 9-16.....	Practical work.....	Training in selection, placement, driving, testing, and use of pitons. Use and care of piton hammer and snaplinks. Proper techniques of ascending and descending with use of rope.	
AC 17-24.....	Demonstration and Practical work.....	Techniques for providing necessary safety factors by proper use of rope. Body, pitons, and natural anchor belay points for roped party climbing.	
AC 25-32.....	Demonstration and Practical work.....	Selection of best routes through mountain terrain and proper marking of route under all conditions.	

AC 33-50	Practical work	Proper technique of balance climbing and belaying on steep mountainous areas by parties of two or three climbers tied into and protected by climbing rope. Adaptation of techniques to overcome lack of various items of equipment.
----------	----------------	---

MOUNTAIN MARCHES AND BIVOUACS
Subject Schedule

CODE MM
Total Periods 54

Periods	Type of instruction	Subject	References and remarks
MM 1-8	Practical work	Marches through difficult terrain which necessitates application of mountaineering techniques and use of map and compass.	
MM 9-54	Practical work	Marches through difficult terrain which requires application of mountaineering techniques and construction and use of improvised shelters. Bivouac routine.	

EVACUATION
Subject Schedule

CODE EV
Total Periods 6

Periods	Type of instruction	Subject	References and remarks
EV 1-2	Conference and demonstration	Evacuation of casualties over rough terrain, cliffs, steep slopes, and across streams. Improvisation of litters and equipment. Use of rope installations as aid in movement.	
EV 3-6	Practical work	Do.	

GLACIERS
Subject Schedule

CODE GL
* Total Periods 14

Periods	Type of instruction	Subject	References and remarks
GL 1-----	Conference-----	Dangers of glacial regions. Mechanics of glacial ice formation. Effects of snow and ice on mountain operations under summer conditions.	
GL 2-----	Conference and demonstration-----	Special equipment used for movements on snow and ice in high mountains (climbing rope, ice axe, crampons, and piton No. 4, ice).	
GL 8-10-----	Demonstration and practical work-----	Proper techniques of placing the feet and moving the body while ascending, descending, and traversing ice and snow surfaces. Use of ice axe and crampons. Glissading (standing or sitting). Use of rope for party movement. Method of self arrest. Route selection on glaciers.	
GL 11-14-----	Demonstration and practical work-----	Proper techniques of crossing crevasses. Crevasse rescue.	

* Total of 14 hours to be devoted to glacier training.

AVALANCHES
Subject Schedule

CODE AV
Total Periods 2

Periods	Type of instruction	Subject	References and remarks
AV 1	Conference	Basic causes of avalanches; types of avalanches; avalanche "triggers".	TF FB-78, Avalanche, running time 30 min.
AV 2	Conference and demonstration	Protective measures (avalanche hazard, forecasting, restrictions, stabilization, and barriers); safety precautions (observation, route selection, timing, and self defense); techniques of avalanche rescue (equipment, immediate action, followup, and evacuation).	

COMMANDER'S TIME
Subject Schedule

CODE CT
Total Periods 21

Periods	Type of instruction	Subject	References and remarks
CT 1-21		Reserved for unit Commanders. Must include mandatory subjects such as character guidance, etc.	5 hour period 1st week 4 hour period weekly thereafter.

INDEX

	Paragraph	Page
Acclimatization -----	24	16
Air:		
Defense artillery (ADA) -----	102	49
Evacuation -----	125	70
Fields and strips -----	105, 108	51, 54
Ground communication -----	180	187
Landed forces -----	57-58	27
Lifted artillery -----	92	45
Supply -----	71	36
Air Conditions -----	11	6
Aircraft:		
Capability -----	107	53
Ceiling limitation -----	48	24
Characteristics and uses -----	105, 107, 108	51, 53, 164
Multiplace -----	105	51
Rotary-wing -----	105, 107	51, 53
Two-place -----	105	51
Flying conditions -----	71	36
Helicopters -----	107, 125	53, 70
Air Defense:		
Artillery -----	4, 102	3, 40
Command post (AADCP) -----	102	40
Surface-to-air missile -----	102	40
Altitude:		
Acclimatization -----	24	16
Air condition -----	11	6
Atmospheric pressure -----	11	6
Cloud formation. (See Clouds.)		
Effects:		
Aircraft -----	107	53
Individuals -----	25, 31	17, 19
Movement -----	14, 35, 37	8, 20, 21
Sounds -----	47	24
Need for oxygen -----	11	6
Psychological adjustment -----	25	17
Variation in temperature. (See Temperature.)		
Ammunition:		
Chemical -----	69	34
Supply -----	59, 75, 92	29, 37, 45
Anchors:		
Basic aids -----	154	130
Natural -----	154	130
Artificial -----	154	130
In belays. (See Belay.)		

	Paragraph	Page
Armor:		
Employment -----	104	51
Suitability -----	4, 103	3, 50
Surprise raids -----	49	25
Arms and services. (See Employment of arms and services.)		
Army aviation:		
Capabilities and limitations -----	105, 107	51, 53
Employment:		
Operations -----	106	52
Special considerations -----	107	53
Tactical aspects -----	107	53
Attack -----	58	28
Pursuit -----	61	30
Retrograde movement -----	67	33
Evacuation by air -----	125	70
Landing sites. (See Landing sites.)		
Ascent:		
In avalanche areas -----	169	165
In snow -----	172	173
Technique:		
Hauling line -----	135	84
Lowering a casualty -----	130, 131	76, 79
Marching -----	35	20
Assault climber -----	84	40
Atmospheric:		
Disturbances -----	19	10
Effects on operations -----	33	20
Luminosity -----	11	6
Pressure -----	11	6
Thunderstorms -----	17	9
Attack:		
Against fortified positions -----	62	30
Flanking -----	58, 62	28, 30
Frontal -----	58	28
Plans -----	58	28
Pursuit -----	61	30
Rules applicable -----	58	28
Supporting weapons -----	59	29
Use of assault climbers -----	84	40
Use of smoke -----	60	30
Vertical envelopment -----	58	28
Avalanche:		
Action of individuals. (See Safety.)		
Basic causes -----	164	150
Climate and weather:		
Exposure -----	164	150
Terrain -----	164, 167	150, 161
Vegetation -----	164	150
Characteristics:		
Climax -----	165	152
Cornice -----	165	152

Avalanche—Continued**Characteristics—Continued**

Damp and wet snow -----	165	152
Dry, loose snow -----	165	152
Classification:		
Combination -----	165	162
Loose snow -----	165	162
Packed snow -----	165	152
Contributory factors -----	167	161
Cord -----	169	165
Effects:		
Artillery fire -----	99	48
Nuclear weapon -----	60	84
Hazard forecasting -----	167	161
Occurrence -----	163, 167	150, 161
Phenomenon -----	164	150
Protective measures:		
Restrictions -----	168	164
Stabilization -----	168	164
Use of barriers -----	168	164
Rescue. (<i>See Safety.</i>)		
Settlement. (<i>See Contributory factors.</i>)		
Triggering -----	166	160
Types -----	165	152

Basic Aids:

A-frame -----	154	180
Anchors -----	154	180
Tightening knots. (<i>See Ropes and knots.</i>)		

Basic technique:

Mountain walking -----	145	92
Precautions -----	145, 146	92, 94
Rock climbing -----	146, 171	94, 173
Balance -----	146	94
Belay. (<i>See Belay.</i>)		
Body position -----	146	94
Dangers to avoid -----	151	124
Margin of safety -----	146	94
Rappel. (<i>See Rappel.</i>)		
Rock falls -----	151	124
Rope management. (<i>See Ropes and knots.</i>)		
Route selection. (<i>See Route selection.</i>)		
Scope -----	151	124
Use:		
Holds -----	146	94
Piton, snaplink, and hammer -----	148	108
Vantage points -----	151	124

	Paragraph	Page
Belay:		
Application:		
Crevasse crossing	176	177
Crevasse rescue	177	179
Litter casualty	129, 130	73, 76
Over snow and ice	172	173
Positions	149	112
Procedures to be used	149	112
Purpose	149	112
Technique	149, 172	112, 173
Bivouac:		
Defense	50	25
Formation	51	25
Precautions	52	26
Set-up	51	25
Types of shelter. (See Shelter.)		
Under various conditions	50	25
Bridge:		
Construction	111, 113	59, 61
Expedients:		
Branches	113	61
Ice	113	61
Rope crossing	113	61
Suspension bridge and cableway	113	61
Swiss bridge	113	61
Snow over crevasses	176, 177	177, 179
Bridging material	104, 113	51, 61
Camouflage:		
Artillery positions	96	46
Landing sites	108	54
Camp:		
Fires	52	26
Sites	50	25
Chemical, biological and nuclear warfare:		
Defense:		
Chemical attack	69	34
Biological attack	69	34
Nuclear attack	69	34
Fallout radiation	69	34
Thermal effects	69	34
Cleanliness:		
Care of feet	29	18
Constipation	29	18
Personal habits	29	18
Washing and bathing	29	18
Waste disposal	30	19
Climate:		
Cloudiness. (See Clouds.)		
Effects:		
Cold	12	7
Weather. (See Weather.)		

	Paragraph	Page
Climate—Continued		
Luminosity	11	6
Mountain air	11, 24	6, 16
Precipitation	15, 19, 21	8, 10, 11
Rate of snowfall	164	150
Variation in temperature. (See Temperature.)		
Wind action	16, 164, 167	9, 150, 161
Clothing:		
Effects of climate and weather	12	7
Requirement	72	36
Clouds:		
Cloudiness	12, 15, 19	7, 8, 10
Marches	45	23
Thickness	19	10
Types:		
Alto-stratus	22	11
Cirrus	19, 22	10, 11
Cumulo-nimbus	22	11
Cumulus	22	11
Stratus	22	11
Combat:		
Defensive:		
Advantages	63	31
Against CBR attacks	69	34
Counterattack	60	32
Delaying	63	31
Disadvantages	64	31
Fortified areas	68	33
Obstacles	63	31
Retrograde movement	67	33
Reverse slop	65	32
Selection of positions	65	32
Use of artillery	95	46
Withdrawal	67	33
Offensive:		
Advance	53	26
Approach	57	27
Assault	84	40
Attack	68	28
Contact	57	27
Control measures	54	27
Envelopments	53	26
Exploitation of pursuit	61, 94	30, 46
Formations	57	27
Infiltration	58	28
Influence of terrain	53	26
Initiative	55	27
Objectives	53, 54	26, 27
Seizure of dominant terrain	53	26
Supporting weapons	59	29

	Paragraph	Page
Combat—Continued		
Offensive—Continued		
Use:		
Mountaineers -----	34	40
Smoke -----	60	30
Patrols -----	85	42
Command -----	3	3
Of air -----	58	28
Posts -----	58	28
Structure -----	2	3
Communication:		
Air-ground -----	180	187
Lateral -----	65	32
Methods of increasing range -----	180	187
Relay stations -----	180	187
Reliability -----	180	187
Routes -----	68	33
Signal:		
Messenger -----	182	190
Radio -----	100, 103, 180	48, 50, 187
Visual:		
Blinker -----	181	189
Heliograph device -----	181	189
Improvised methods -----	181	189
Semaphore method:		
Smoke -----	181	189
Wigwag -----	181	189
Wire -----	100, 103, 108, 179	48, 50, 54, 186
SOI -----	108	64
Concealment:		
Availability -----	9	5
Aid stations -----	118	67
Landing sites -----	108	54
Use of smoke -----	60	30
Conditioning:		
Acclimatization -----	24	16
Fatigue -----	24, 61	16, 30
Fear of height -----	25	17
Personal hygiene -----	27, 28, 29, 30	18, 19
Physical -----	28	17
Psychological adjustment -----	25	17
Sicknesses. (See Medical.)		
Training -----	190	195
Water discipline -----	28	18
Cover -----	9	5
Crevasse:		
Bridging -----	176	177
Crossing -----	176	177
Detection -----	176	177
Rescue -----	177	179
Deception -----	63	31

	Paragraph	Page
Descent:		
Carrier technique -----	132	81
Casualty -----	130	76
Cliff evacuation -----	181	79
In avalanche area -----	169	165
In snow -----	172	178
March technique -----	35	20
Operation of hauling line -----	135	84
Rappel -----	150	118
Roped movement -----	153	126
Digging -----	9	5
Driving -----	140	88
Employment of the arms and services:		
Air defense artillery (ADA) -----	102	49
Armor -----	103, 114	60, 65
Army Aviation -----	105-108	51
Engineers -----	109-115	58
Field artillery -----	91-101	45
Infantry -----	86-90	43
Limitations -----	4	3
Medical -----	116-138	66
Engineers (Combat):		
Bridging -----	113	61
Demollitions -----	114	65
Missions -----	109	58
Obstacles and mines -----	115	65
Reconnaissance -----	111	59
Road construction -----	112	60
Envelopment. (See Combat.)		
Equipment:		
Avalanche:		
Adjustment -----	169	165
Cord -----	169	165
Rescue -----	170	169
Camouflage -----	96	46
Chemical:		
Protective mask -----	69	34
Effects of weather and terrain -----	12, 43	7, 23
Engineer:		
Heavy -----	109, 111	58, 59
Mine detectors -----	115	65
Snow removal -----	158	146
Medical -----	123	60
Ordnance:		
Explosives -----	114, 115	65
Fire control, electrical -----	102	49
Sleds and runners -----	158	146
Vehicles -----	139, 140	87, 88
Quartermaster:		
Clothing -----	72, 160	36, 147
Cooking -----	74	36
Skis and snowshoes -----	160, 171	147, 173

	Paragraph	Page
Equipment—Continued		
Quartermaster—Continued		
Sleeping	72, 73	36
Special (climbing)	147, 148, 172	102, 108, 173
Tentage	52	26
Signal:		
Radio	178, 180	186, 187
Visual	181	189
Wire	179	186
Evacuation. (See Medical.)		
Exposure:		
Caused by an avalanche	164	150
Effect on body	173, 177	175, 179
Falls:		
Free	177	179
Suspended	177	179
Fatigue. (See Conditioning.)		
Field Artillery:		
Coordination with infantry	93	40
Employment	4	3
Fire control	101	48
Limitations	92, 158	45, 146
Measuring elevation	101	48
Observation	53, 97, 101	26, 47, 48
Positions	96	46
Stabilization of snow	168	164
Survey	101	48
Tactical principles	91	45
Tactics:		
Defense	95	46
Pursuit	94	46
Targets	99	48
Transfer of fires	101	48
Types:		
Air-lifted	92	45
Self-propelled	98	47
Towed	98	47
Use:		
Block and tackle or winch	98	47
Grousers	98	47
Sleds and runners	158	146
Field Fortification:		
Areas	68	33
Shelters. (See Shelter.)		
First Aid and Hygiene:		
Personal	27-30	18
Fog:		
Marches	45	23
Signaling	181	189
Glacier:		
Crevasse:		
Crossing	176	177

	Paragraph	Page
Glacier—Continued		
Crevasse—Continued		
Detection -----	176	177
Rescue -----	177	179
Dangers -----	178	176
Roped parties -----	174	175
Routes -----	175	176
Snow bridges -----	176, 177	177, 179
Glissading. (<i>See</i> Movement.)		
Hammer. (<i>See</i> Pitons, snaplink, and hammer.)		
Hazards:		
Avalanche -----	158, 167	146, 161
Cold injury -----	30	19
Contamination -----	69	34
Crevasse -----	176	177
Driving in the mountains -----	140	88
Flying conditions -----	71	36
Glacier movements -----	173	176
Landing facilities -----	108	54
Rock falls -----	151	124
Slab formation -----	162	148
Snow bridges -----	176	177
Terrain -----	25	17
Humidity -----	11	6
Infantry:		
Application of tactics -----	86	43
Employment of weapons -----	4	3
Factors governing use of weapons -----	87	43
Stabilization of snow -----	168	164
Supporting weapons:		
Grenades and rockets -----	90	44
Machine guns -----	88	44
Mortars -----	88	44
Recoilless rifle -----	88	44
Snipers -----	89	44
Infiltration -----	58	28
Intelligence (Combat):		
Observers and Scouts -----	81	89
Patrols, combat -----	85	42
Reconnaissance:		
Aerial -----	139	87
Engineer -----	111	59
Motorized -----	130	87
Patrols -----	82	39
Road -----	139	87
Knots. (<i>See</i> Ropes and knots.)		
Land mines:		
Antitank and antipersonnel -----	115	65
Mining technique -----	115	65
Removal technique -----	115	65

	Paragraph	Page
Landing sites:		
Approaches and exits -----	108	54
Concealment -----	108	54
Equipment -----	108	54
Identification -----	108	54
Location -----	108	54
Marking -----	108	54
Obstacles above ground -----	108	54
Preparation -----	108	54
Selection and considerations -----	105, 107, 108	51, 53, 54
Size -----	108	54
Soil condition -----	108	54
Takeoff and landing -----	108	54
Topography -----	108	54
Logistics:		
Distribution -----	70, 75	35, 37
Effects of terrain -----	5, 108	4, 50
Means of transportation -----	70, 77, 107	35, 37, 53
Planning -----	70	35
Rations -----	74	36
Requirement for special clothing and equipment -----	72	36
Supply:		
Aerial -----	71, 102, 107	36, 49, 53
Ammunition -----	59, 75, 92, 102	29, 37, 45, 49
Factors affecting -----	70	35
Local sources -----	70	35
Location of points -----	70	35
Over vertical cliffs -----	77	37
Time requirement -----	5	4
Log ramp. (See Training.)		
Luminosity -----	11	6
Maintenance:		
Protective mask -----	69	34
Rope -----	147	102
Signal equipment -----	180	187
Maps and overlays:		
Contour -----	111	59
Coverage -----	109	58
Geodetic control -----	109	58
Overlays -----	111	59
March Technique:		
Ascending -----	35	20
At night -----	44	23
Column length -----	40	22
Descending -----	36	21
Discipline -----	38	21
Distance -----	192	197
Effects of -----	36	21
Halts -----	39	22
In clouds and fog -----	45	23
Pacing and speed -----	35, 39, 192	20, 22, 197

	Paragraph	Page
March Technique—Continued		
Rate of movement -----	35, 37	20, 21
Selection of route. (See Route selection.)		
Timing and time length -----	41, 50, 51	22, 25
Traversing -----	35	20
Use of feet -----	35	20
Medical:		
Adjustment, psychological -----	25	17
Ascending and descending -----	36	21
Cold effects -----	125	70
Equipment -----	123	69
Evacuation:		
At night -----	125	70
By air -----	125	70
Over vertical terrain -----	125	70
Plans -----	126	72
Principles -----	127	72
Speed -----	118	67
Techniques. (See Techniques of evacuation.)		
Installations:		
Aid stations -----	118	67
Clearing stations -----	121	69
Collecting points -----	120, 122	68, 69
Litter bearer posts -----	138	87
Litter bearer haul -----	120, 121, 125	68, 69, 70
March procedures -----	122	69
Personal hygiene -----	27, 30	18, 19
Principles of operation -----	116	66
Shelter -----	118, 119, 124	67, 67, 70
Sickness:		
Mountain -----	31	19
Sunburn -----	14, 173	8, 175
Valley -----	32	19
Units and personnel:		
Company aid men -----	119, 120	67, 68
Litter bearer teams -----	118, 121, 125	67, 69, 70
Medical Battalion -----	121	69
Medical platoon, battle group -----	117	66
Water supply and discipline -----	28	18
Missiles -----	91, 102	45, 49
Movement:		
Driving technique -----	140	88
Effects of altitude -----	14	8
Objectives -----	42	22
Operating vehicles on steep grades -----	140	88
Retrograde -----	67	33
Technique of marching. (See March Technique.)		
Trained personnel:		
Free climbing -----	152	126
Roped climbing -----	153	126

	Paragraph	Page
Movement—Continued		
Unit -----	154-157	130
Basic aids. (See Basic aids.)		
Fixed ropes. (See Ropes and knots.)		
Hauling lines. (See Ropes and knots.)		
Stream crossing. (See Stream crossing.)		
Under various conditions:		
Along ridges and valleys -----	41	22
At night -----	44	23
Cross-country -----	8	5
In clouds and fog -----	45	23
In difficult terrain -----	43	23
On rock face. (See Basic technique.)		
Over snow and ice:		
Belays -----	172	173
Crevasses -----	176	177
Glissading -----	172	173
Step-cutting -----	172	173
Use of special equipment -----	172	173
Use of aircraft -----	107	53
Mountaineering:		
Application -----	142	91
Capabilities and duties of climbers -----	79	38
Employment of mountaineers:		
Assault climbers -----	84, 193	40, 199
Guides -----	44, 78-80	23, 37
Flank patrols -----	83	39
Observers and scouts -----	81, 195-197	39, 200
Reconnaissance patrols -----	82, 197	39, 201
Importance -----	141	91
Requirement for qualified climbers. -	78, 143	37, 91
Technique. (See Basic technique.)		
Mountain:		
Alr. (See Climate.)		
Description -----	6	5
Transportation problems -----	77	37
Nuclear:		
Exploitation -----	4	3
Fire -----	63	31
Observation:		
Artillery -----	97	47
Establishment of posts -----	195	200
Signs of avalanche -----	169	165
Obstacles:		
Avalanche barrier -----	168	164
General -----	63	31
Glacier -----	176	176

	Paragraph	Page
Obstacles—Continued		
Streams -----	157	141
Use of hauling line to overcome obstacles -----	135	84
Operations:		
Command of air -----	58	28
Decentralization of control -----	33	20
Defensive. (See Combat.)		
Effects of terrain and weather -----	12, 33, 53	7, 20, 26
Independency or semi-independency -----	33, 56	20, 27
Infiltration -----	58	28
Missions -----	56	27
Objectives -----	53	26
Offensive. (See Combat.)		
Standing operating procedures -----	34	20
Surprise -----	33	20
Orders:		
Fragmentary -----	5	4
Relaying during night movement -----	44	23
Types -----	55	27
Organization:		
Airborne and infantry division -----	2	3
Changes and modifications -----	2, 34	3, 20
Command structure -----	2	3
Pitons, snaplink, and hammer:		
Hammer, piton -----	148	108
Piton:		
Placing -----	148	108
Removing -----	148	108
Types -----	148	108
Snaplink -----	148	108
Uses in belay -----	140	112
Precipitation -----	15, 19	9, 10
Glaze -----	19	10
Intensity. (See Contributory factors.)		
Moisture-bearing winds -----	21	11
Prediction -----	23	12
Psychological adjustment -----	25	17
Confidence -----	25	17
Pursuit -----	61	30
Rappel:		
Application of technique -----	131	79
Establishment -----	150	118
Purpose -----	150	118
Types:		
Hasty -----	150	118
Seat -----	150	118
Rations -----	74	36
References -----	App. I.	204
Rescue:		
Avalanche -----	170	169
Crevasse -----	177	179

	Paragraph	Page
Roads and trails -----	7, 8	5
Approach -----	57	27
Construction -----	109-112	58
Culverts -----	109-112	58
Drainage -----	109-112	58
Effects:		
Armor -----	103, 104	20
Artillery -----	98	58
Location -----	41, 111	22, 59
Maintenance -----	104, 109-112	51, 58
Selection -----	41, 111	22, 59
Snow removal -----	109-112	58
Trafficability -----	109-112	58
Roped climbing:		
Descent -----	153	126
Signals -----	153	126
Simultaneous movement -----	153	126
Tension -----	153	126
Three-man party -----	153	126
Two-man party -----	153	126
Ropes and knots:		
Care of rope -----	147	102
Rope management:		
Characteristics -----	147	102
Fixed ropes -----	155	135
Hauling lines -----	156	138
Suspension traverse -----	156, 157	138, 141
Terms used -----	147	102
Vertical -----	156	138
Types of knots:		
Anchor -----	147	102
Double sheet bend -----	147	102
Middle rope -----	147	102
Special:		
Bowline on a coil -----	147	102
Figure-of-eight slip -----	147	102
Overhand -----	147	102
Prusik -----	147	102
Three loop bowline -----	147	102
Transport -----	147	102
Square -----	142	102
Tightening:		
Prusik -----	154	130
Transport -----	154	130
Route reconnaissance -----	41, 140, 175, 192	22, 88, 176, 197
Route selection:		
Factors governing the choice -----	41	22
Multiple routes -----	58	28
Natural routes -----	111	59
Study of rock -----	148	108
Under various conditions:		
Avalanche areas -----	169	165

	Paragraph	Page
Route selection—Continued		
Under various conditions—Continued		
Communication -----	68, 109, 111	33, 58, 59
Evacuation -----	126	72
Glaciers -----	175	178
Laying wire -----	179	186
Night movement -----	44	23
Rock climbing -----	151	124
Stream crossing -----	109, 157	58, 141
Safety:		
Adjustment of personnel -----	25, 26	17
Precautions:		
Night movement -----	44	23
Operating vehicles -----	140	88
Rock climbing -----	146	94
Stream crossings -----	138	86
Protection from:		
Avalanches -----	167-169	161
Cold injuries -----	12, 30	7, 19
Sicknesses -----	31, 32	19
Snow blindness -----	173	175
Sunburn -----	14, 173	8, 175
Vehicular accidents -----	139, 140	87, 88
Requirements for landing sites -----	108	54
Rescue:		
Avalanche -----	170	169
Crevasses -----	176, 177	177, 179
Snow -----	162	148
Testing -----	169	165
Security:		
Antimechanized -----	49	25
Bivouacs -----	50, 51	25
Flanks -----	48	24
Landing sites -----	108	54
Listening posts -----	47	24
Marches -----	41, 46	22, 23
Observation -----	46	23
Restricted visibility -----	46	23
Shelter:		
Aid stations and collecting points -----	118, 124	67, 70
Natural -----	69	34
Protection from nuclear weapons -----	69	34
Types -----	51, 69	25, 34
Smoke:		
Landing sites -----	108	54
Offensive use -----	60	30
Signals -----	181	189
Snaplink. (See Pitons, snaplink, and hammer.)		
Snow and ice:		
Characteristics -----	158, 165	146, 152
Classification (table II) -----	161, 167	147, 161

	Paragraph	Page
Snow and ice—Continued		
Density. (See Contributory factors.)		
Depth	167	161
Effect on training and equipment	160	147
Evacuation	137	86
Glacier ice	161	147
Intensity. (See Contributory factors.)		
Movement	172	173
Purification agent	11	8
Rate of snowfall	162, 164	148, 150
Slides. (See Avalanche.)		
Snow formations:		
Sun crust	162	144
Wind crust	162	144
Wind slab	162	144
Testing	169	165
Soil Condition:		
Drainage	111	59
Ground surface	164	150
Landing sites	108	54
Rock	145, 146, 151	92, 94, 124
Terrain evaluation	111	59
Sound:		
Carrying	47	24
Mountain streams	47	24
Vibration effect	106	100
Stream crossing:		
Construction of bridges. (See Bridges.)		
Deep water	157	141
Fording	157	141
Rapids	157	141
Suspension traverse	157	141
Sun effects:		
Solar radiation	14, 16	8, 9
Sunburn	14, 173	8, 175
Tactics:		
Principles	4, 86	3, 43
Small forces	4	3
Tanks:		
Suitability for mountain operations	4	3
Techniques of evacuation:		
Across streams	136, 157	86, 141
Alternate methods	131, 132	79, 81
Ascending and descending	130, 131	76, 79
At night	125	70
Cliffs	181	79
Expedients	137	86
Handling of casualty	129	73
Horizontal hauling line	135	84
In snow	137	86
Pole carry	133	83

	Paragraph	Page
Techniques of evacuation—Continued		
Preparation	129	73
Securing of casualty	129	73
Trees	134	83
Use of carriers	132	81
Use of skids	130	76
Temperature:		
Effect on avalanches	164, 165	150, 152
Contributory factor	167	161
Trigger action	166	160
Inversion	14	8
Solar heating	14	8
Variation	11, 164	6, 150
Terrain:		
Concave and convex slopes	164	150
Description of mountains	6	5
Effect:		
Avalanches	164	150
Evacuation	125	70
Movements	35, 43	20, 23
Chimneys	192	197
Ledges	192	197
Scree	192	197
Steep slopes	192	197
Talus	126, 192	72, 197
Valleys	58	28
Woods	192	197
Operations	33, 53, 64, 65	20, 26, 31, 32
Lack of passable routes	48	24
Roadnets and trails	7, 41, 103	5, 22, 50
Training:		
Aids:		
Belay tower	188	192
Films	188	192
Log ramp	188	192
Assault climbers	193	199
Aviation personnel	107	53
Class organization	187	192
Climbing exercises	191	197
Combat patrols	198	202
Engineer	110	59
Equipment movement course	194	199
Instructors	185, 190	191, 195
Master training program for moun- taineering and glacier work	App. II.	206
Medical	119, 128	67, 73
Method		
Climbing instructors	190	195
Conditioning	190	195
Coordination	190	195
Orientation	190	195
Practical work	190	195

	Paragraph	Page
Training—Continued		
Mountaineering school -----	188	191
Mountain walking course -----	192	197
Observation and sniper posts -----	195	200
Requirements -----	144	91
Scouting and patrolling by night -----	197	201
Scouts -----	196	201
Selection of students -----	184	191
Supervisors -----	186	192
Unit -----	189	195
Transportation:		
Means:		
Air -----	70, 74, 106	35, 36, 52
Block and tackle -----	77, 98	37, 47
Cableways -----	77	37
Holsts -----	77	37
Individual -----	70, 74	35, 36
Vehicular -----	70, 74, 139, 140	35, 36, 87, 88
Winches -----	77, 98	37, 47
Road trafficability -----	180, 140	87, 88
Traffic control -----	140	88
Vegetation:		
Effect on avalanches -----	164	150
Vehicle:		
Ambulance -----	121	69
Armored -----	103, 104	50, 51
Driving technique:		
At night -----	140	88
In daylight -----	140	88
On steep grades -----	140	88
Winching -----	140	88
Prime movers -----	140	88
Safety:		
Checks -----	140	88
Devices -----	140	88
Towing artillery -----	91	45
Visibility:		
Clouds -----	12	7
Darkness -----	44, 125, 197	23, 70, 201
Fog -----	12	7
Precautions -----	52	26
Security -----	46	23
Water:		
Content of snow (density) -----	168	164
Discipline -----		
Purification -----	28	18
Supply -----	76	37
Supply -----	28, 76	18, 37
Weapons:		
Air defense artillery (ADA) -----	4, 102	3, 49
Artillery, field -----	4, 91	3, 45
Infantry -----	4, 88-90	3, 44

	Paragraph	Page
Weapons—Continued		
Nuclear -----	4	3
Stabilization of snow -----	168	164
Surface-to-air missile -----	102	49
Tactical employment -----	58	28
Weather:		
Characteristics:		
Avalanche -----	169	165
Bad -----	21	11
Cloudy -----	12, 15, 22	7, 8, 11
Fair -----	23	12
Fog -----	18	10
General -----	13	7
Glaze -----	19	10
Cold front -----	19	10
Contributing factors. (See Contributing factors.)		
Effect:		
Avalanches. (See Avalanche.)		
Movement -----	35, 45	20, 23
Operations -----	12, 33	7, 20
Forecasting -----	20	11
Precipitation -----	15, 23, 165, 167	8, 12, 152, 161
Prediction -----	23	12
Sudden changes -----	12, 14	7, 8
Thunderstorms -----	17, 19	9, 10
Warm front -----	19	10
Winds and storms -----	13, 16, 19, 22	7, 9, 10, 11
Wind:		
Contributory factor -----	167	161
Effects of topography -----	13, 16	7, 9
Funneling -----	16	9
Moisture-bearing -----	21	11
Solar radiation -----	16	9
Storms:		
Local (valley breezes) -----	16, 22, 23	9, 11, 12
Prediction -----	23	12
Thunder -----	17, 21	9, 11
Traveling -----	19, 21-23	10, 11
Velocity -----	16, 21, 23	9, 11
Winterization:		
Air defense artillery -----	102	49
Protective mask -----	69	84

By Order of *Wilber M. Brucker*, Secretary of the Army:

MAXWELL D. TAYLOR,
General, United States Army,
Chief of Staff.

Official:

R. V. LEE,
Major General, United States Army,
The Adjutant General.

Distribution:

Active Army:

DCSPER (1)	Inf Bn (1)
ACSI (1)	Armor Bn (1)
DCSOPS (1)	Abn Bn (1)
DCSLOG (1)	Avn Co (1)
ACSRC (1)	Engr Co (1)
Technical Stf, DA (1)	FA Btry (1)
Admin & Technical Stf Bd (1)	Inf Co (1)
USCONARC (10)	Armor Co (1)
OS Maj Comd (5) except USARAL (400)	Abn Co (1)
MDW (1)	USMA (2)
Armies (5)	USACGSC (825)
Corps (5)	Br Svc Sch (5) except USAIS (73)
Div (5)	US ARADSCH (25)
Inf Bg (2)	USAARMS (30)
Abn Bg (2)	MAAG (1)
Engr Gp (2)	Mil Mis (1)
FA Gp (2)	Units org under fol TOE:
Inf Regt (2)	55-19 (1)
Armor Gp (2)	55-56 (1)
Abn Gp (2)	55-57 (1)
Avn Bn (1)	55-456 (1)
Engr Bn (1)	55-457 (1)
FA Bn (1)	55-458 (1)

NG: State AG (3); units—same as Active Army except allowance is one copy to each unit.

USAR: Same as Active Army except allowance is one copy to each unit.

For explanation of abbreviations used, see AR 320-50.